


Quality assurance
Power peak



MOTOREDUCER


Low Backlash
Planetary Gearboxes

**Assuring quality is our professional commitment,
Performance and improvment are our principles,
Customers' full satisfaction is our pride.**

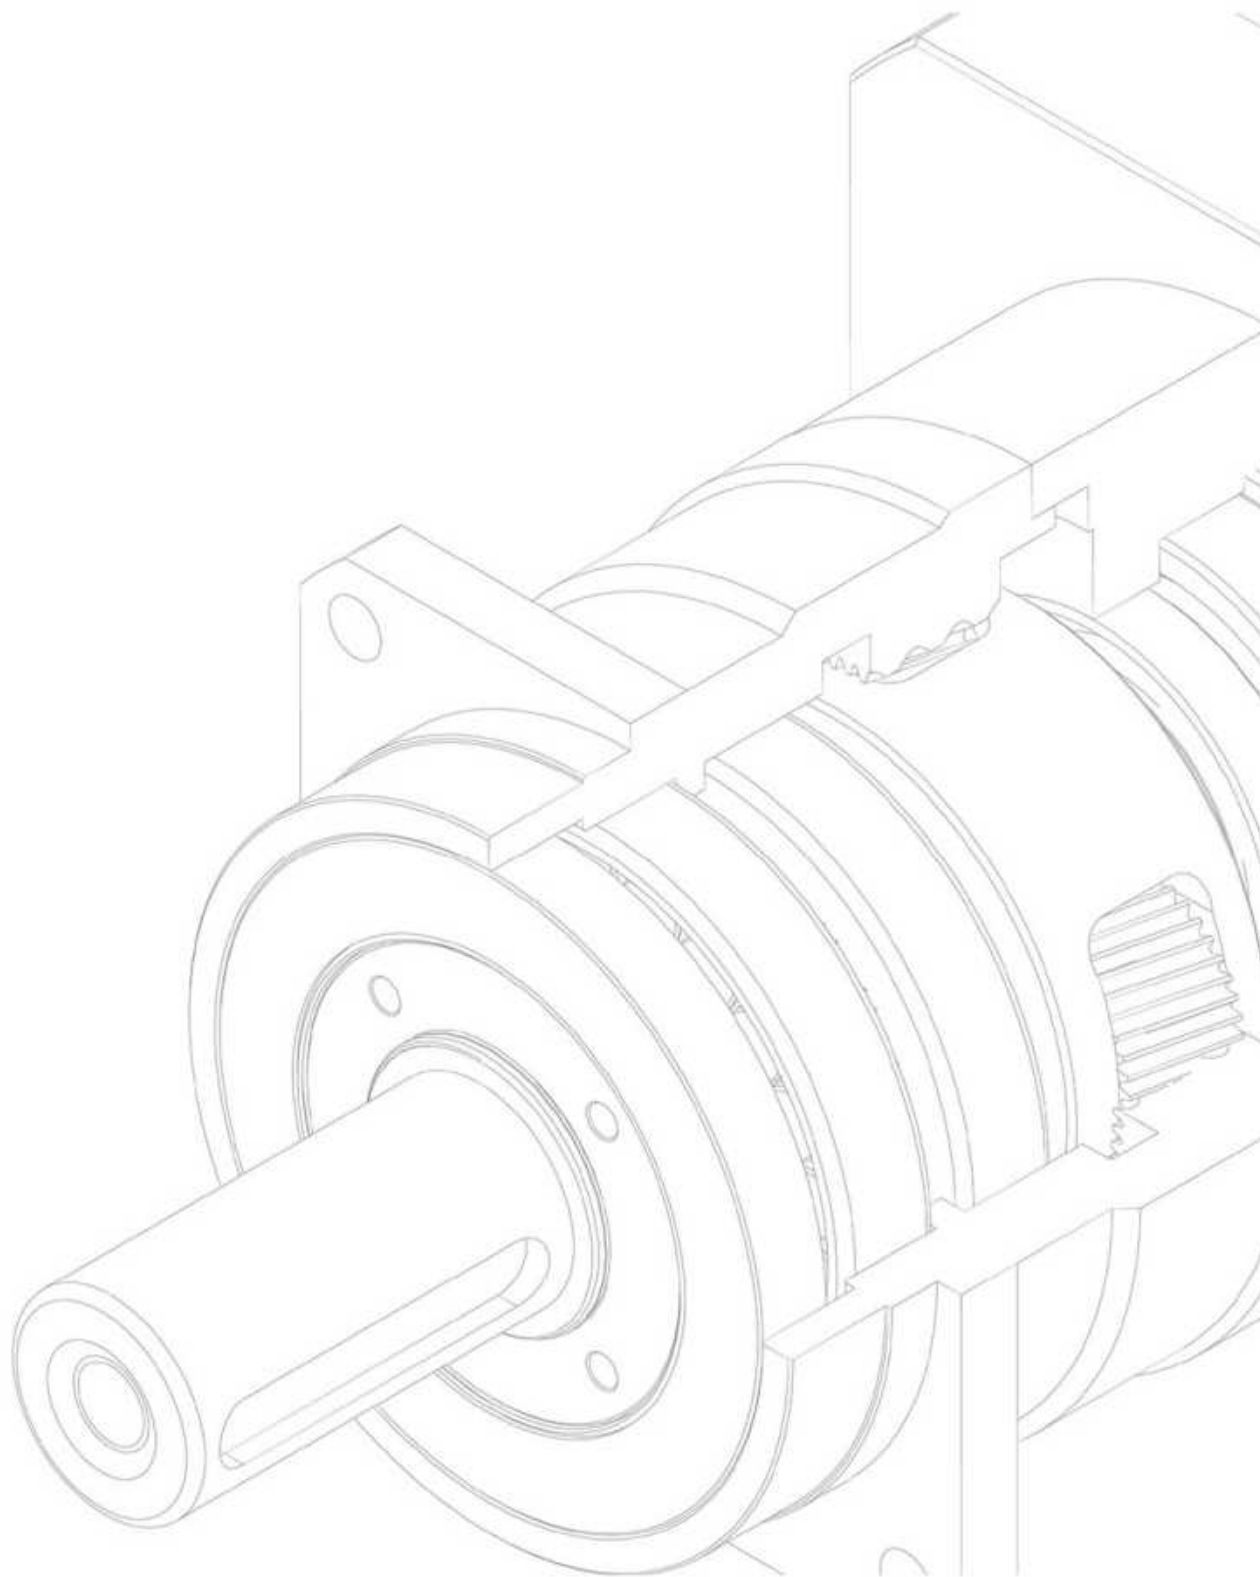

The provided data are only on an indicative basis and are subject to modification.
本样册所提供的相关信息仅供参考，可根据客户需求做出相应改动。

MOTOREDUCER Planetary Gearboxes

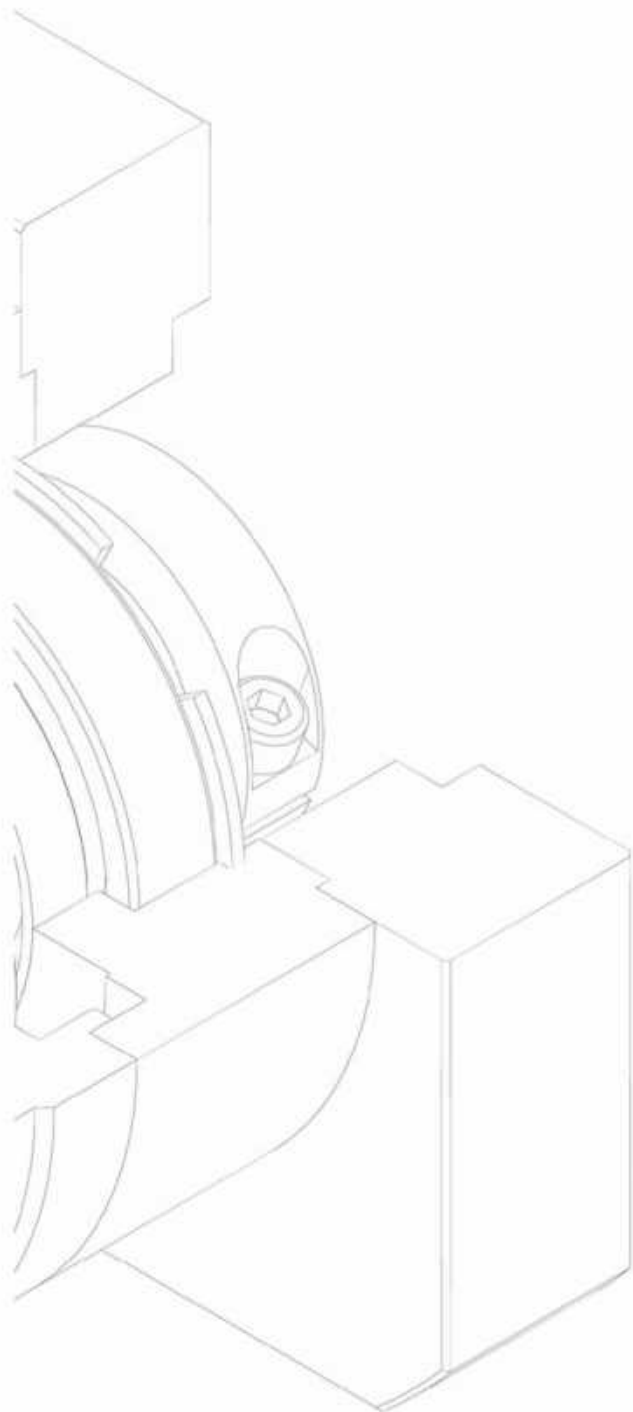

17-32

MVB



33-48

MVE



49-64

MVD



65-80

MAF



81-94

MAFQ



95-104

MPVB



105-114

MPVE



115-124

MAB



125-132

MAE



133-140

MVS



141-154

MVBR



155-168

MVER



169-180

MVDR



181-194

MAFR



About us

RECKON DRIVES is located in Saint-Etienne (France), one of the Traditional Military Industry Production Center in Europe. Specialized in power transmission equipment with higher requirements and higher standards, RECKON was born of the cooperation between MOTOREDUCER and a French well-known military aerospace equipment manufacturing Company after years of technical exchange, so as to offer top quality products to the global market.

MOTOREDUCER planetary gearboxes entered Chinese market in 2010 and since then have successfully supplied thousands of equipment manufacturers for various industrial applications. Today, in order to follow the booming industrial trend, we adhere more than ever to our philosophy "using world's leading technology, creating value for the world". From 2018 on, RECKON-MOTOREDUCER full range of products is available with even higher performances and offers a larger choice of low backlash planetary gearboxes.

RECKON DRIVES公司位于欧洲传统军工生产基地-法国Saint-Etienne（圣埃蒂安城市），是由MOTOREDUCER和法国知名军工航天设备制造企业经过多年技术交流以及对全球市场分析、战略规划而合作打造的更高要求、更高标准、更加全面的传动设备制造企业。

MOTOREDUCER行星减速机从2010年开始在中国市场推广至今，成功为各领域上千家工业设备制造企业服务。如今，为了满足工业制造整体水平的提高，更好的秉承“用世界领先科技，为世界创造价值”的理念，2018年将会推出更高性能、更加全面的RECKON-MOTOREDUCER精密行星减速机系列产品。




About us



Performance, innovation and creation are the foundation of RECKON spirit; we are always referring to these principles so as to bring you entire satisfaction. Quality has always been our daily concern since we are aiming to reach perfection. Our quality and environmental policy remains our top priority and are at the center of our management system which integrates a tracking record for each phase of production and service. Using state-of-the-art high performance equipment for production and quality control of each component, we keep on developing extremely precise gear so as to bring you top notch low backlash planetary gearboxes according to your expectations. In the future we will keep on focusing on innovation to provide you with creative solutions.

RECKON一直以传承，创新，创造作为企业发展理念，我们始终坚信品质为企业生存的根本，且一直保持着对更高品质的追求，为客户的客户提供放心高品质的产品。一个产品的生命，其价值的体现便是满意每一位使用他的客户。在此，我们真诚的感谢您在我司的成长过程中给予我们的信任以及陪伴，为了您的选择，我们会尽最大的努力给您提供满意的产品。在未来的日子里RECKON将继续开拓创新，为您提供终极解决方案。我们将一直秉承这些理念陪伴您走下去。

Research & Development

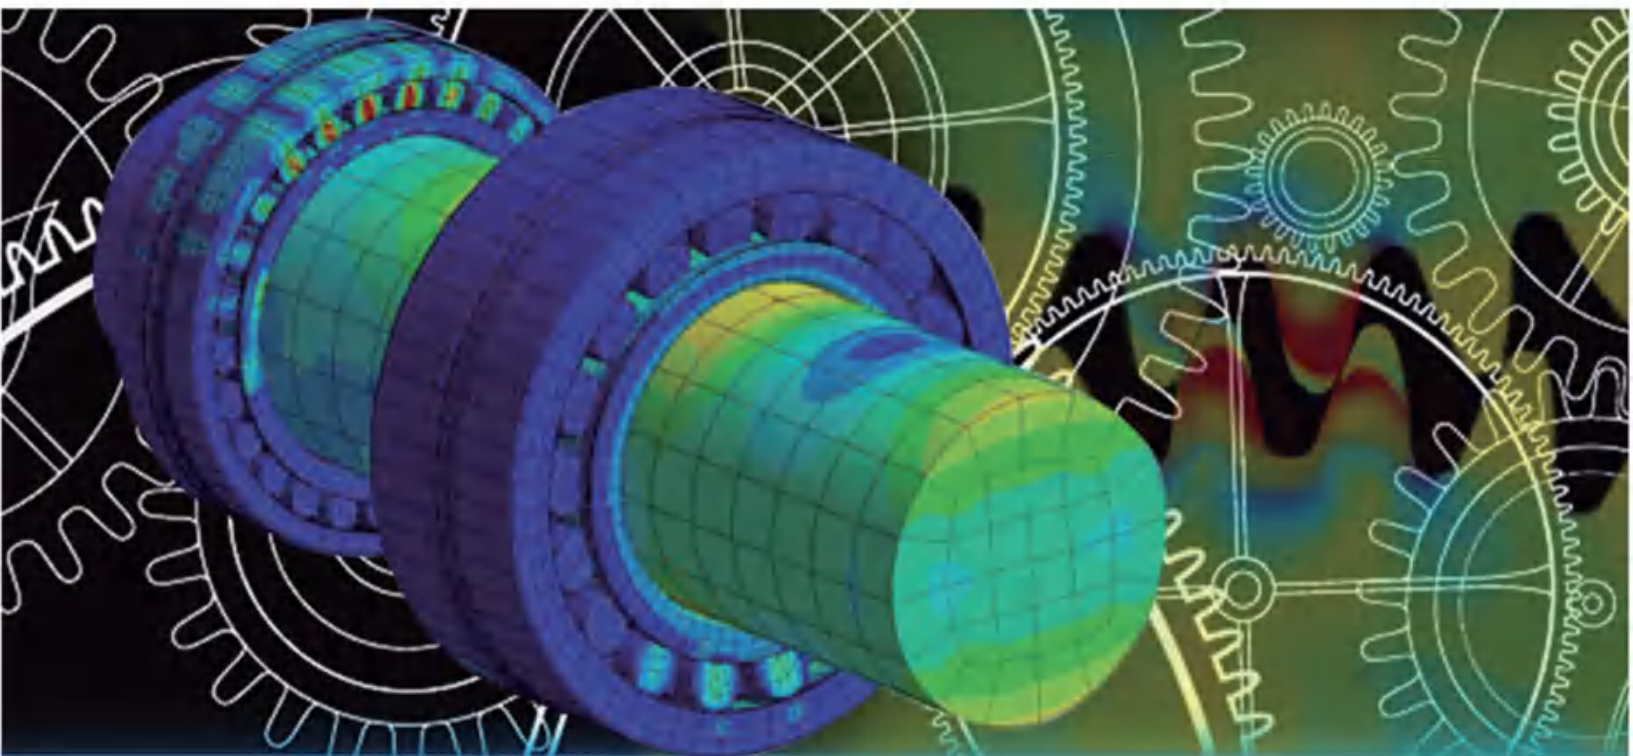

Our research unit is constantly trying to bring new solutions and focus on an optimized use of machine-tools. Our production unit and its 90 machines are working under the total control of our quality department, for each manufactured mechanical piece so as to guarantee that there is no defect. This is why we are internally controlling the totality of the processing from machining to handling. Quality is the hardcore of our company spirit, and this enables us to look far in the future. Our internal quality standards often exceed those usually found in the industry. Because of this strict and challenging control process, we are able to offer you especially long working life planetary gearboxes. Our ISO 9001 certification allows us to get technical feedback from our clients and to continue improving on every aspect.



我们的研发部，负责给客户提供最新最快的方案。我们拥有90台大型减速机专业生产设备，并且拥有独立的质量检测部。我们的宗旨是每一个产品零瑕疵，这促使我们在生产和组装上更加严格的质量把控。追求质量是企业的精神核心，我们的质量检测标准已远超过同行业水平。由于产品经过质量严格把控，确保能够为客户提供使用寿命更长的行星减速机。通过ISO9001质量认证，获得了更多客户的认可和反馈，促使我们不断改进，不断超越。

Customer Service



It is an honor for us to share our professional expertise gain through intense cooperation between our partners worldwide. We develop tailor-made concept products upon your special request at a very comprehensive price because we care about your final customers. Following this philosophy we analyze all most important parameters such as working conditions, duration of operation, speeds, or loads in order to bring you the corresponding solution. Our service culture leads us to be where you need us in the shortest delays, whether for supply of parts or technical support for your convenience.

与全球合作伙伴分享我们的专业知识对于我们来说是一种荣誉，根据客户对产品的特殊要求，我们研发部为您提供特定产品，性价比合理。遵循这个理念，我们分析重要参数例如工作条件，运行持续时间，速度，或负荷，总结出相对应的解决方案。我们的服务宗旨是，当你需要我们时我们会在最短的时间内为你提供部件或技术支持。

Quality & Production



- From raw material to bearings, gaskets or lubricants, each component comes from the best suppliers of their industry because we chose them through meticulous selection process and we keep on proceeding stringent quality control to secure your relation with your final client.
- Our helical gears (satellite, ring) are case hardened to 58-62 HRC and machined to class DIN6. This confers them high precision, great stability, high output torque, low noise level and low backlash.
- Our components are processed and corrected internally following our unique technical method.
- Precision is constant all along the rates working lifetime.

• 我们所用的原材料及轴承等配件均由优秀供应商所提供，经我公司严格的技术评估，质量筛选和流程把关。

• 我们提供的所有行星齿轮、太阳齿轮均为螺旋齿轮，经过渗碳淬火至58-62HRC，进行精密磨削而成，具有运转精度高、稳定性好、高输出扭矩、低背隙和低噪音的特性。

• 我们提供的所有齿轮都是经过我司独有的技术修正的。这样的修正可以降低摩擦，提高寿命并且降低噪音。

• 我们的产品精度在整个工作寿命期间都能保持稳定。

Quality & Production



Quality & Production

1 吹膜机
Film blowing machine



2 机械手
Industrial robots



3 印刷设备
Printing machines



7 医疗设备
Medical Equipment



8 检测设备
Measuring equipment



9 汽车制造
Automotive industry

We can offer you the all the modifications requested in your field of application. Our sales and service network provides quick availability and competent support. For special requirements we bring you individual solutions. Of course, our services are always cost optimized. Thanks to our professional expertise, our specialists provide technical and market consultation for a wide variety of industrial sectors.

纺织机械
Textile machines 4



包装机械
Packing machines 5



非标自动化
Non-standard automation 6



卫星通讯
Satellite communication 10




金属加工
Metal processing 11




制药行业
Pharmaceutical industry 12

在您的应用领域，我们能够满足您的每一次需求。对于一些特殊要求，我们将会考虑给您提供相应的解决方案。我们的市场化网络能够确保快速有效的获取我们想要的信息。目前我们的产品已经应用于工业领域的各个行业，适用于机床，机械手，印刷设备，纺织机械，包装机械，非标自动化，医疗设备，检测设备，汽车制造，卫星通讯，金属加工，制药行业等工业领域。

3D Section Plan

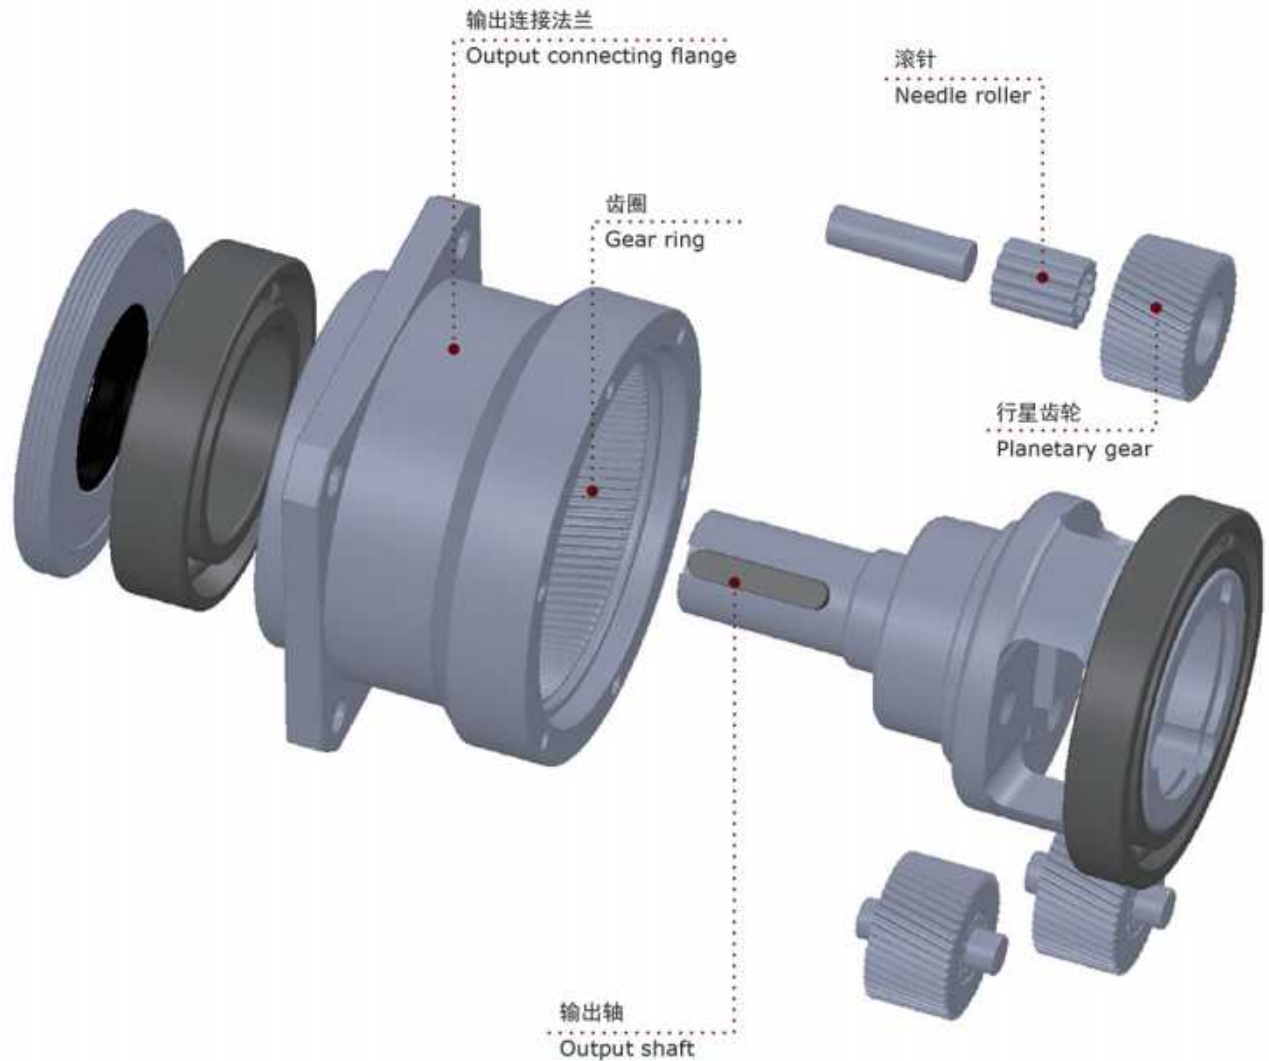

Spare parts are strictly submitted to the quality control process required by RECKON. All our satellite and sun gears are helical-shaped and are case hardened to 58-62 HRC, granting superior transmission results. Satellite gears are double-supported with full-complement needle bearings that increase torsional stiffness. According to the International Protection Rating system, MOTOREDUCER gearboxes designation is IP65. This means protection against dust infiltration (dust-tight) and water jets which are emitted from a nozzle and sprayed against the housing from all directions (jet water).

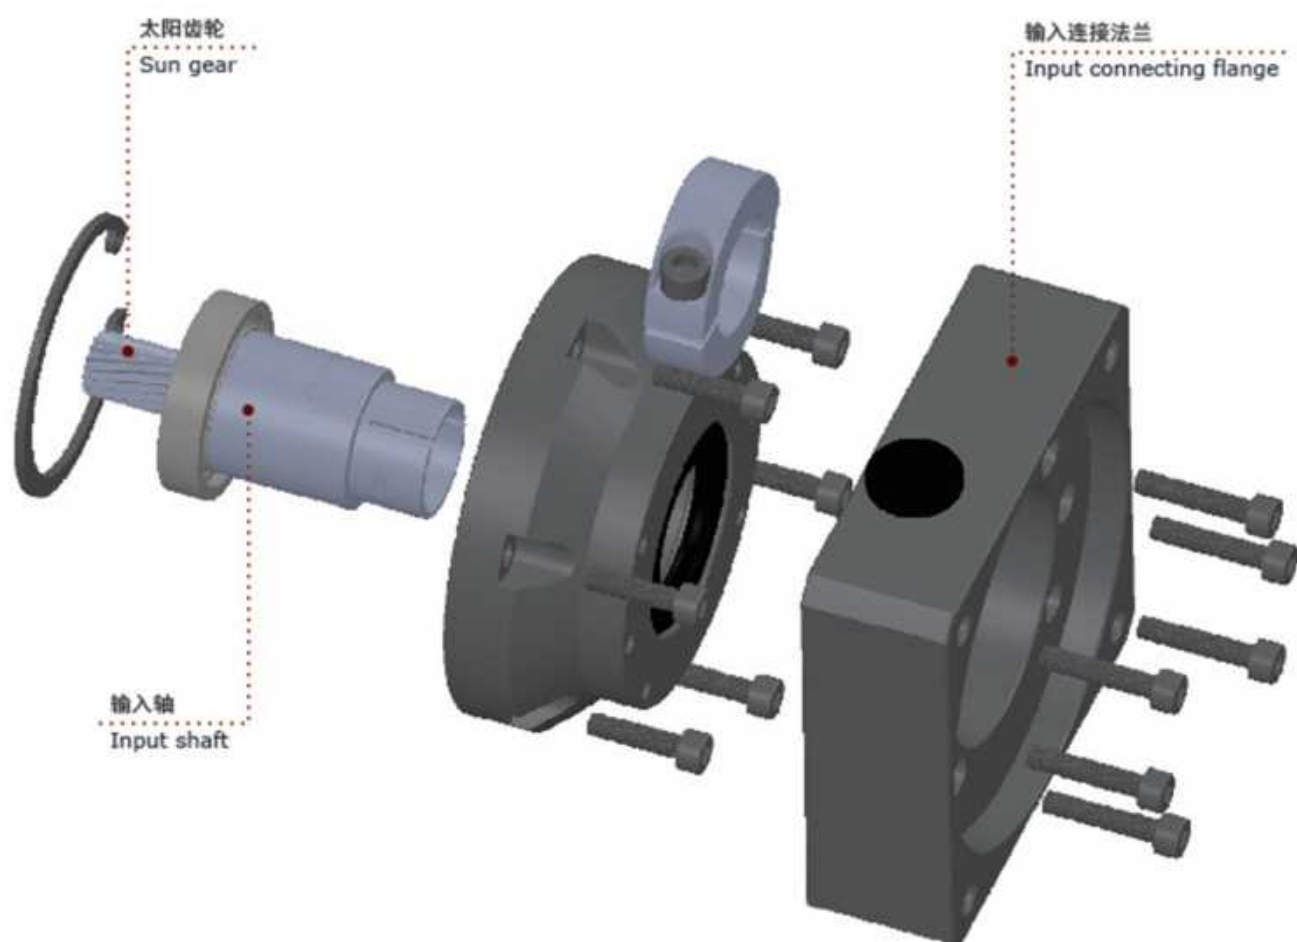

所有的零部件均按照RECKON严格的质量控制体系把关，行星齿轮和太阳齿轮均为斜齿轮，渗碳淬火至58-62HRC，进行精密磨削，经过技术修正，以达到完美的传动效果。行星齿轮由满滚针轴承两端支撑，增强了扭转刚度。MOTOREDUCER行星减速机防护等级达到国际标准IP65（完全防尘、防水）。

Product line

Performance rating scale / 性能对照表

Model 系列	Positioning accuracy 定位精度	Radial force 径向力	Torsional stiffness 扭转刚性	Backlash 背隙	Wide range of size 规格多样性	Power density 功率密度	Wide range of ratio 传动多样性
 MVB	M M M	M M	M M M	M M M	M M M	M M M	M M M
 MVE	M M M	M M	M M M	M M M	M M M	M M M	M M M
 MVD	M M M	M M M	M M M	M M M	M M	M M M	M M M
 MAF	M M M	M M M	M M M	M M M	M M	M M M	M M
 MAFQ	M M M	M M M	M M M	M M M	M M	M M M	M M
 MPVB	M M M	M M	M M	M M M	M M	M M M	M M M
 MPVE	M M M	M M	M M	M M	M M	M M M	M M M
 MAB	M M M	M M	M M	M M	M M	M M	M M
 MAE	M M M	M M	M M	M M	M M	M M	M M
 MVS	M M M	M M	M	M	M	M	M M
 MVBR	M M M	M M	M M M	M M	M	M M M	M M M
 MVER	M M M	M M	M M M	M M	M	M M M	M M M
 MVDR	M M M	M M M	M M M	M M	M	M M M	M M M
 MAFR	M M M	M M M	M M M	M M	M	M M M	M M M

M Standard标准

M M Good强

M M M Maximum最强

Model selection

Indication for model selection / 机型型号表示

Model / 系列	Size / 规格	Ratio / 减速比 *	Precision / 精度	Output Shaft 输出轴	Motor reference 马达型号
MVB	040/060/090/120/140/180/220	3~100	P0≤1 arcmin P1≤3 arcmin P2≤5 arcmin P3≤standard	K:带键轴 S:光轴 C:非标轴 T:超载	REXROTH SIEMENS SCHNEIDER PARKER MITSUBISHI PANASONIC YASKAWA
MVE	040/060/090/120/155/205/235/330	3~100			
MVD	060/075/100/140/180/210/240	3~100			
MAF	047/064/090/110/140/200/255/285	4~100			
MAFQ	047/064/090/110/140/200/255/285	4~100			
MPVB	060A/060B/090A/090B/115A/115B	3~100			
MPVE	060A/060B/090A/090B/115A/115B	3~100			
MAB	060/090/115/140	3~100			
MAE	060/090/115/155	3~100			
MVS	060/080/100/125	3~100			
MVBR	040/060/090/120/140/180/220	3~100			
MVER	040/060/090/120/155/205/235	3~100			
MVDR	040/060/090/120/140/180/220	3~100			
MAFR	047/064/090/110/140/200/255	4~100			

* MAB/MAE系列

减速比 6, 18, 24, 36, 42, 48, 54, 60
 8, 32, 48, 56, 64, 72, 80
 9, 27, 45, 63, 81, 90 公司暂不生产。

* 1 Stage (3~10), 2 Stages (12~100) 3~10为1级, 12~100为2级

The following two stage transmission ratios are also available / 两级传动亦可做出以下传动比:
 3×4=12, 3×7=21, 3×9=27, 4×4=16, 4×6=24, 4×7=28

Formula symbols and indices

Designation	项目	Symbol /代码	Unit/单位
Reduction ratio	减速比	i	
Nominal output torque	额定输出力矩	T_{2N}	Nm
Peak acceleration torque	最大加速力矩	T_{2B}	Nm
Emergency braking torque	紧急制动力矩	T_{2Not}	Nm
Nominal input shaft speed	额定输入转速	n_{1N}	rpm
Max. input shaft speed	最大输入转速	n_{1Max}	rpm
Backlash	回程间隙	j_t	arcmin
Torsional stiffness	扭转刚性	C_{2t}	Nm/arcmin
Max. radial load	最大径向力	F_{2RMax}	N
Max. axial load	最大轴向力	F_{2AMax}	N
Rotational Inertia	转动惯量	J_1	kgcm ²
Working efficiency	工作效率	η	%
Working lifetime	工作寿命	L_h	h
Operating temperature	环境温度	T	°C
Lubrication Method	润滑方式	Lub	
Protection class	防护等级	PC	
Mounting position	安装方向	MP	
Noise	噪音	dB	


The following table indicates all the symbols and the units that are used in this catalogue. For the 14 gearbox series, all the technical data refer to the present table.

以上表格是所有产品性能表各参数的项目、符号、单位的文字备注，接下来14个系列产品的性能表，请对照此表格进行阅读


Basic definitions

keyword 关键词	Explanation/解释说明
弧分	1度等于60弧分 ($1^\circ = 60 \text{ arcmin}$)。当回程间隙为1 arcmin时，齿轮箱旋转一圈传递到输出端的角偏差为1/60度。
回程间隙	是指减速机输出轴与输入轴回转时产生的最大偏差角，测量时先将减速机的输入轴固定，然后在输出端用力矩仪加载到一定的力矩，以克服齿轮箱内的摩擦力。
迟滞曲线	检测迟滞是为了得出减速机的扭转刚度，通过检测可以得出迟滞曲线。检测时，先将减速机的输入端固定，然后在输出端的两个旋向分别持续的加载到T2B（最大加速力矩）后逐步卸载，可绘制出对应扭矩的扭转角，能得到一条闭合的曲线，从迟滞曲线里可以计算出减速机的回程间隙和扭转刚度。
扭转刚度	由加载力矩和所产生的扭转角之间的比率来定义， $C2t = \Delta T / \Delta \varphi$ 。 在迟滞曲线上能计算出需要用多大的扭矩才能把输出轴转动一弧分。
转动惯量	表示物体绕轴转动时保持其匀速圆周运动或静止的特性参数。


回程间隙示意图

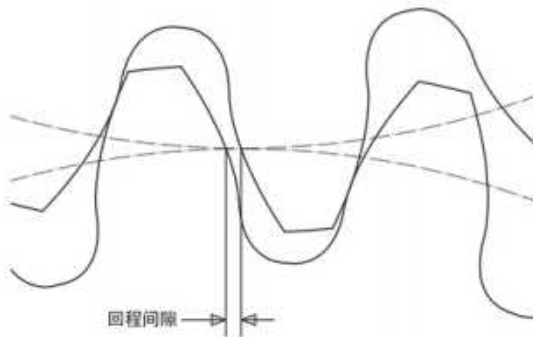

迟滞曲线示意图

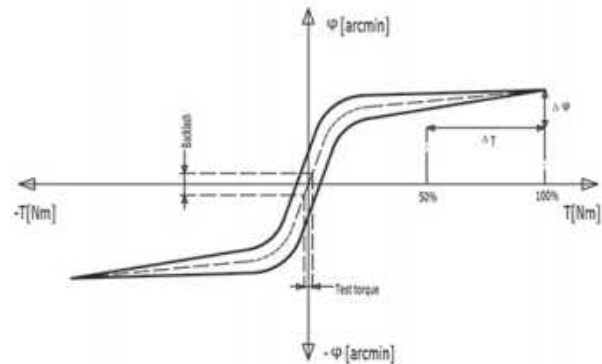


Ordering process

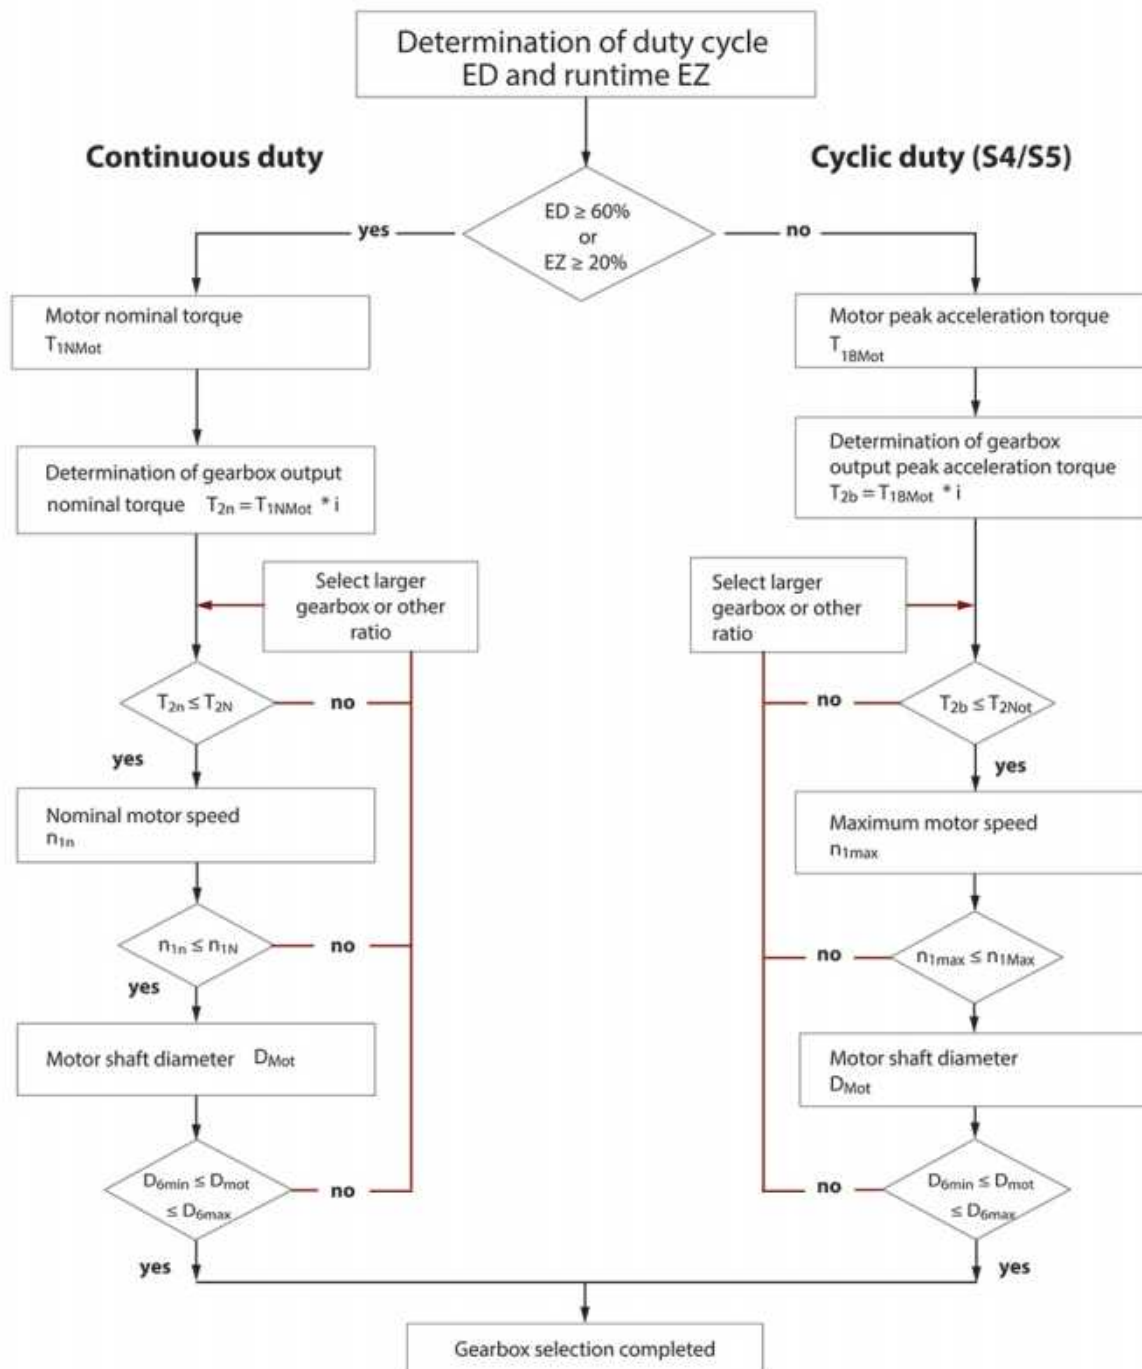

i from catalogue
 T_{2N} from catalogue
 T_{2Not} from catalogue
 T_{1BMot} motor data
 T_{1NMot} motor data

n_{1n} nominal motor speed
 n_{1N} gearbox nominal input speed from catalogue
 n_{1max} maximum motor speed
 n_{1Max} gearbox maximum input speed from catalogue

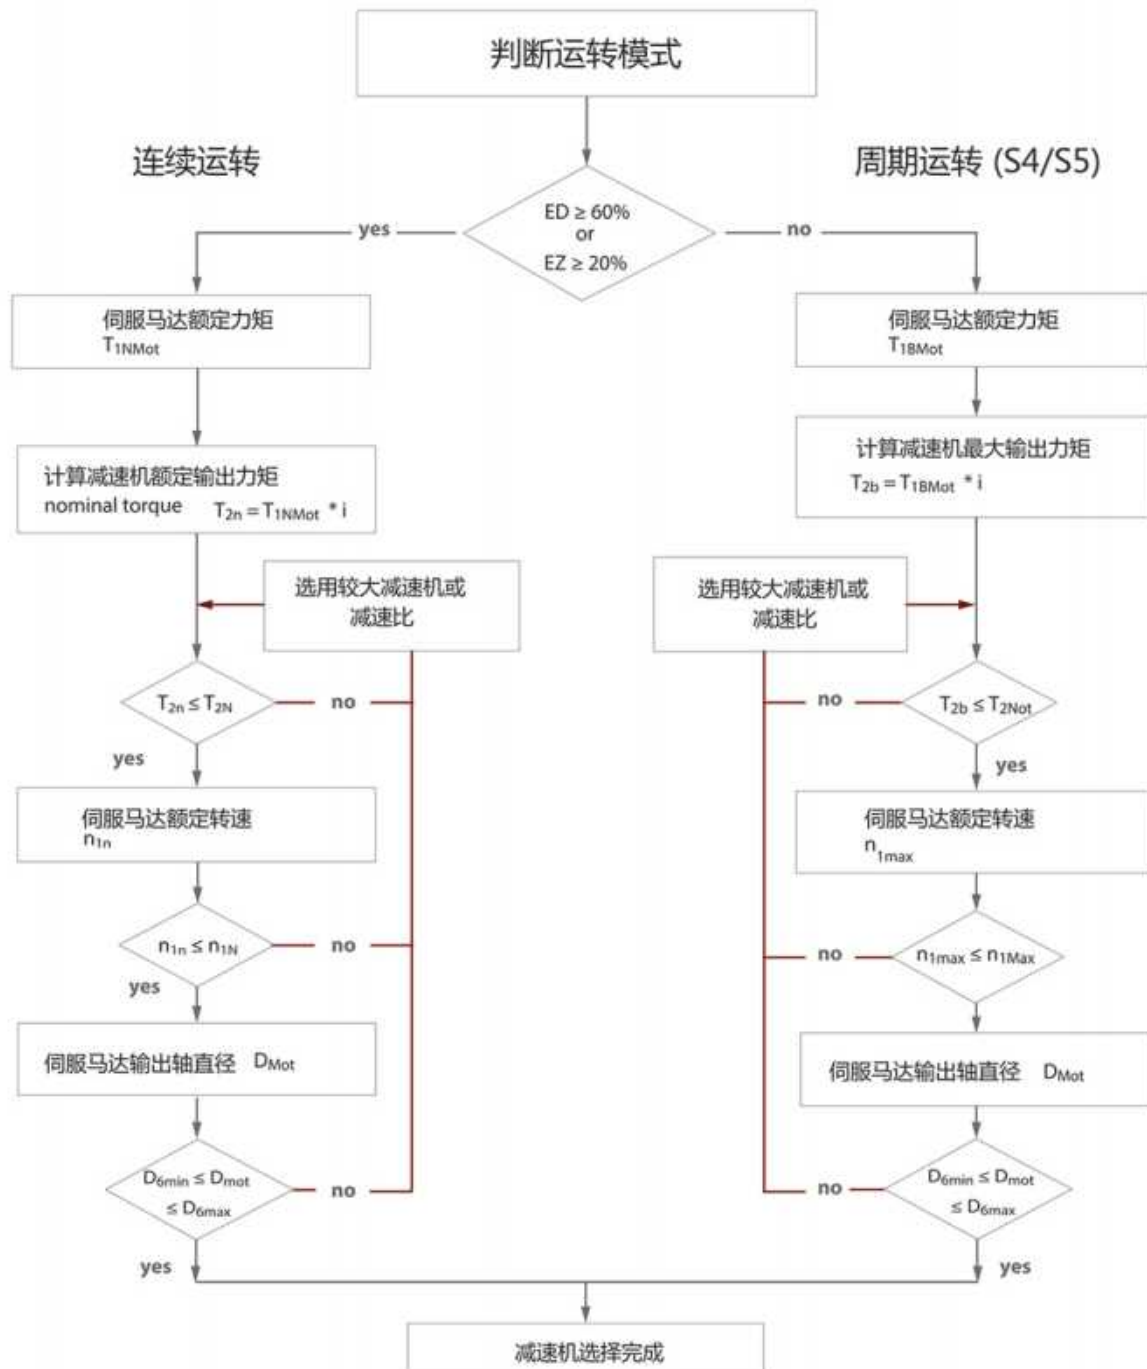

i 见样本参数
 T_{2N} 见样本参数
 T_{2Not} 见样本参数
 T_{1BMot} 见伺服马达参数
 T_{1NMot} 见伺服马达参数


n_{1n} 伺服马达额定转速
 n_{1N} 减速机额定输入转速 见样本参数
 n_{1max} 伺服马达最大转速
 n_{1Max} 减速机最大输入转速
 见样本参数

MVB SERIES



专门为频繁反复和紧急加速而设计，MVB系列可提供高精度、高刚性和高扭矩。

Powerful, robust and precise, this planetary gearbox is designed to work under heavy operating duty.

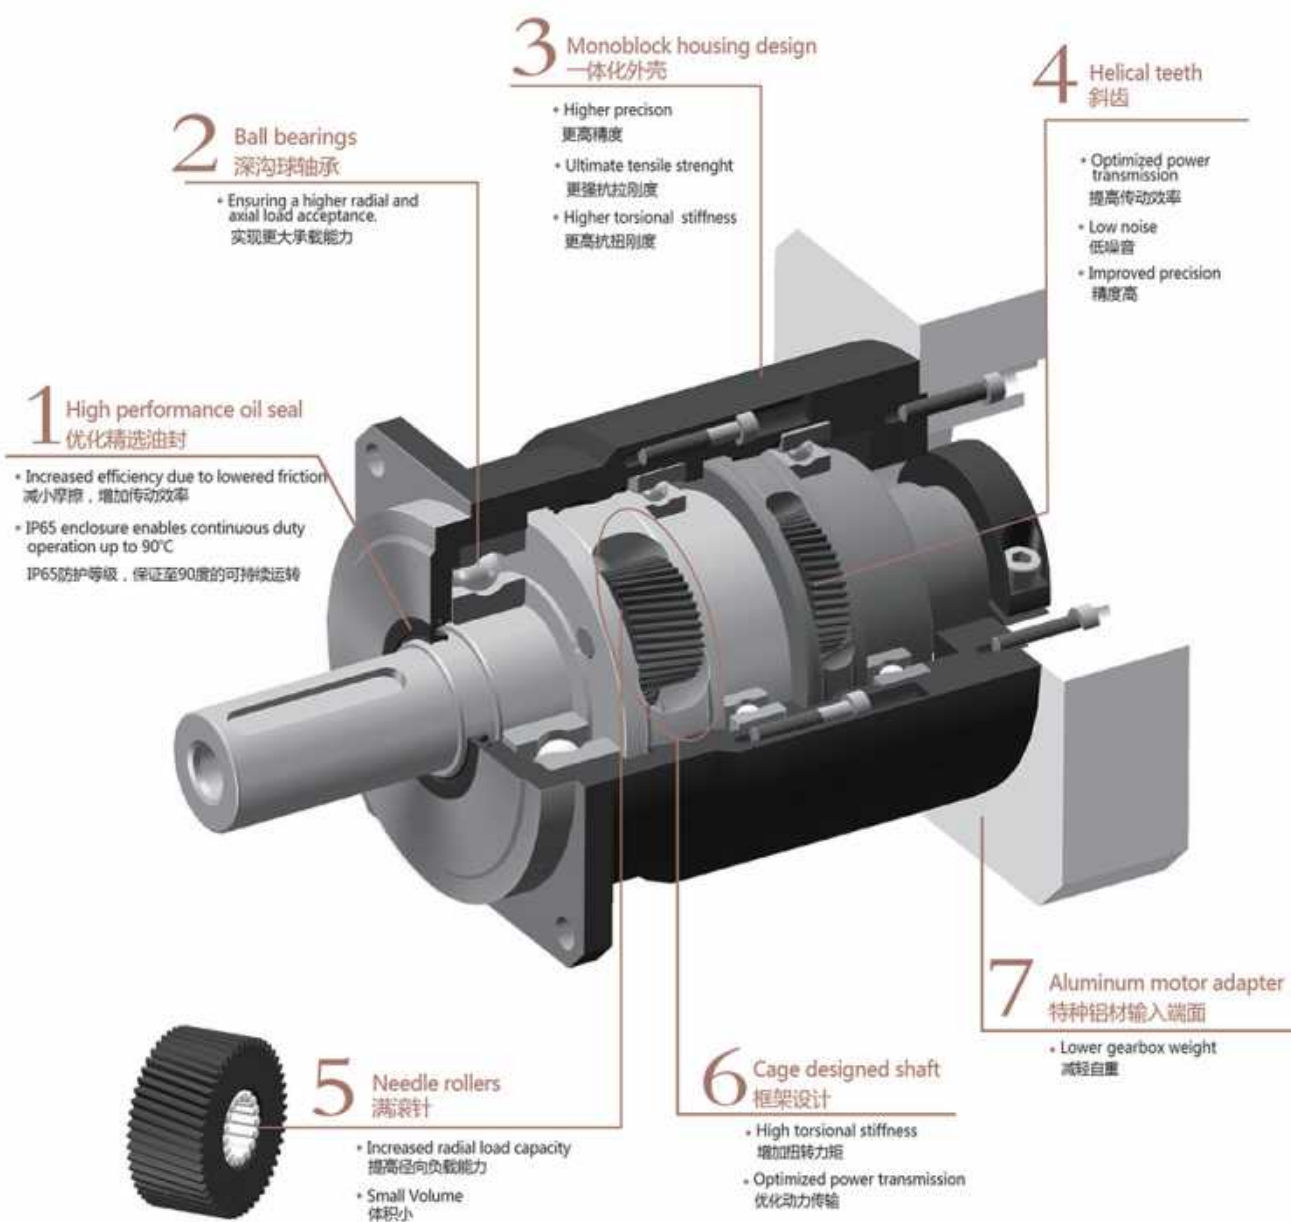

造型数据:


Selection data:

扭矩 (Nm)	14-1900
速比	3-100
背隙 (arcmin)	3-5
最大工作温度 (°C)	90
噪音 (dB)	63-77


Nominal output torque (Nm)	14-1900
Reduction ratio	3-100
Backlash (arcmin)	3-5
Max.working temperature (°C)	90
Noise (dB)	63-77

Drawing / Size

MVB-040-L1

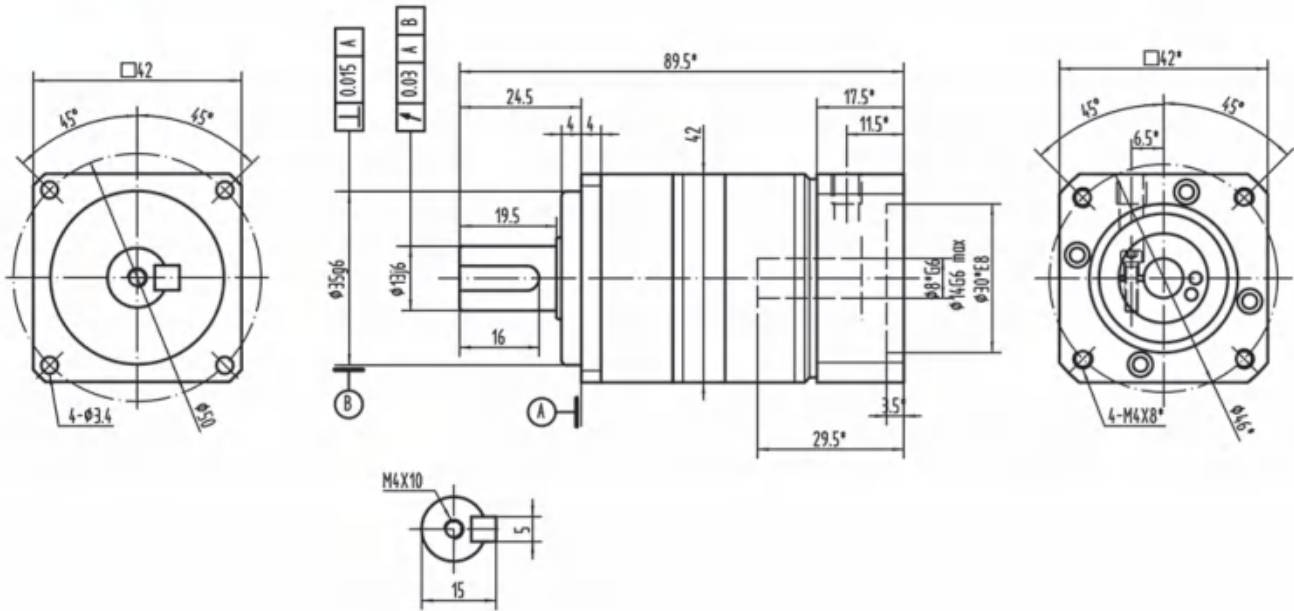

MVB-040-L2

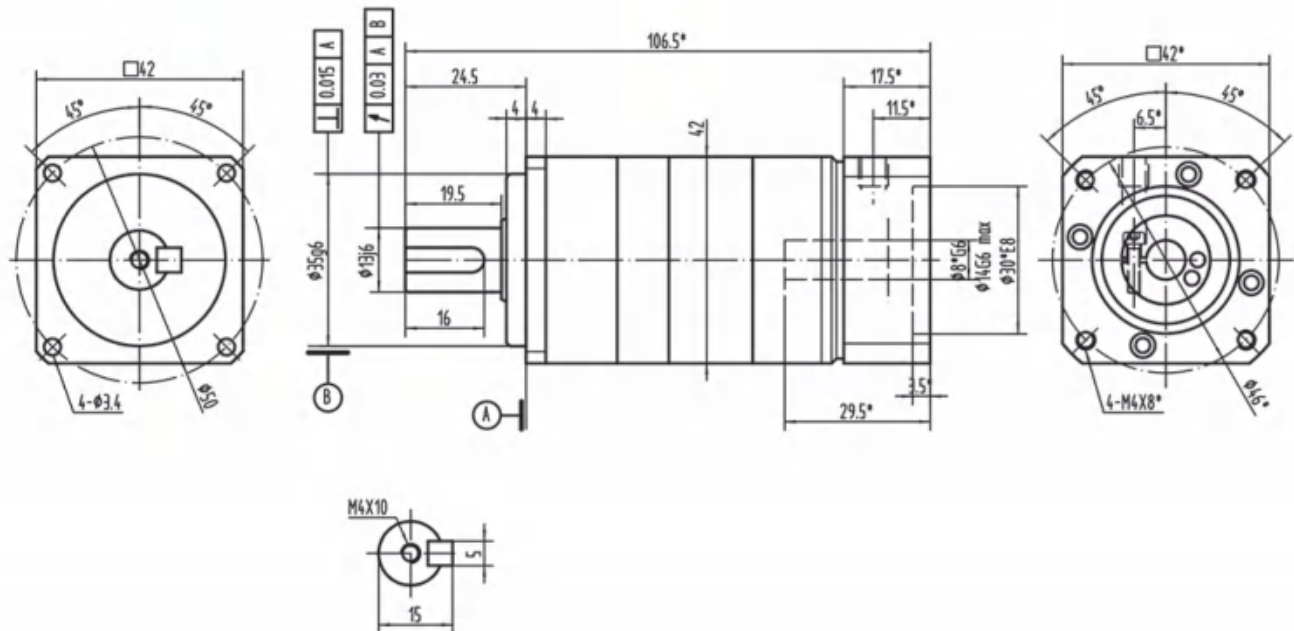


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MVB-060-L1

MVB

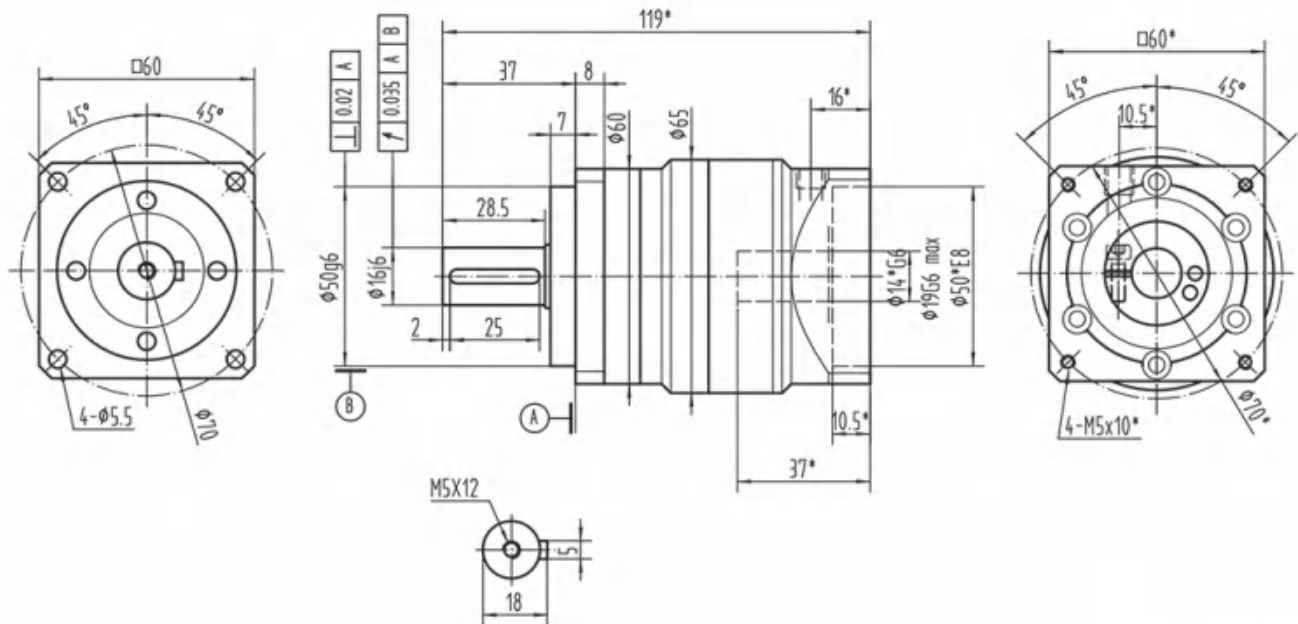

MVB-060-L2

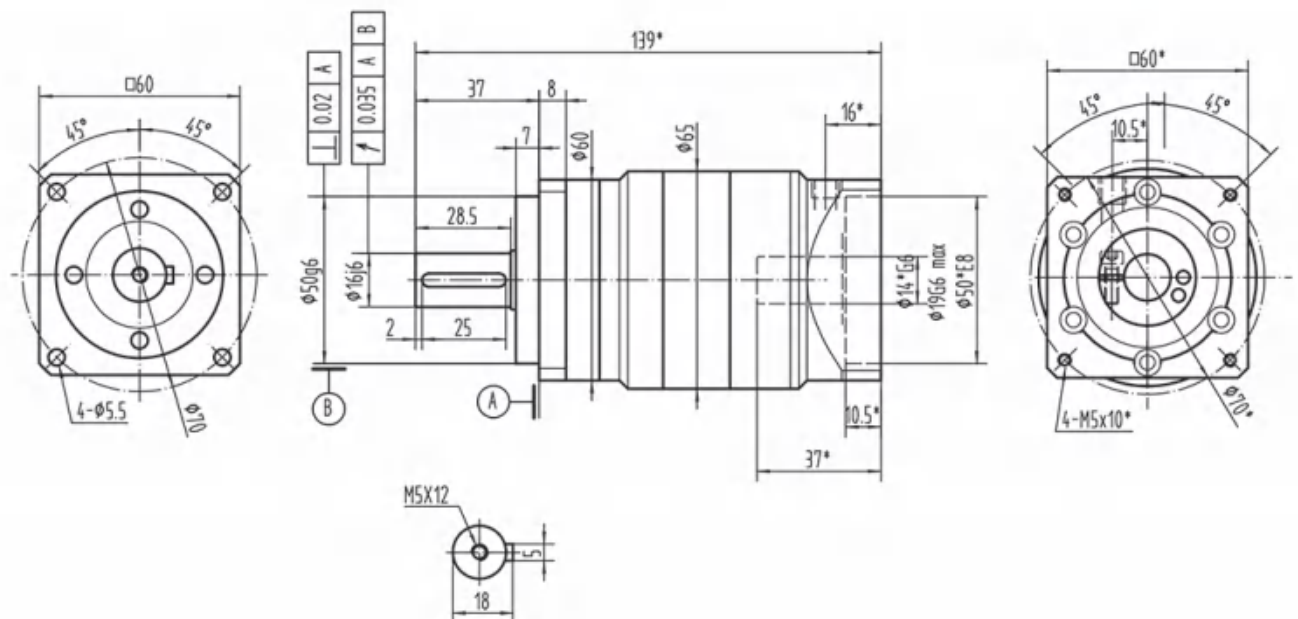


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MVB

MVB-090-L2
(Smaller hole)

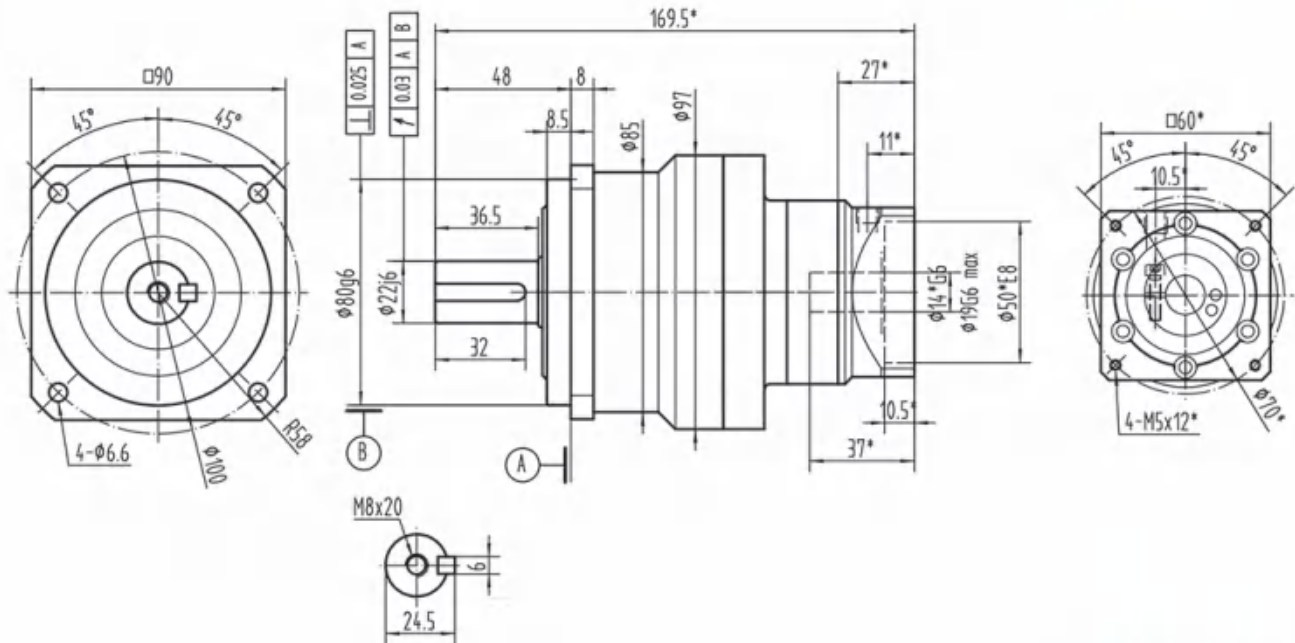


MVB-120-L1

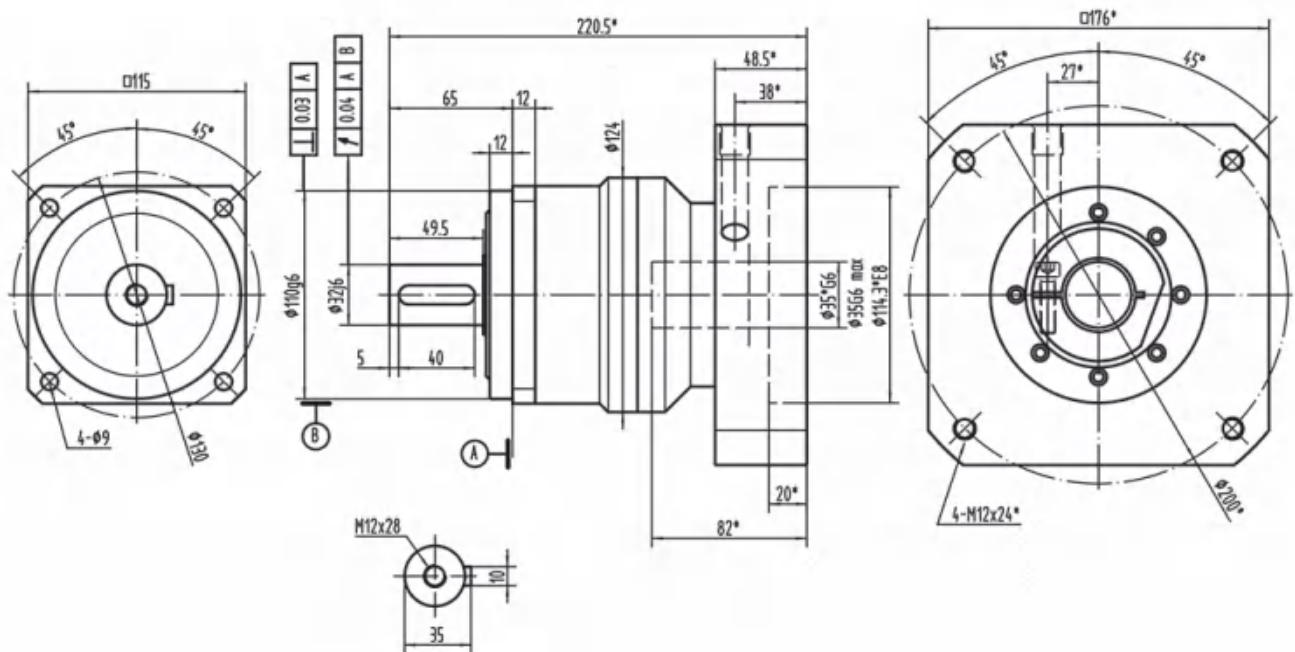


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVB-120-L2

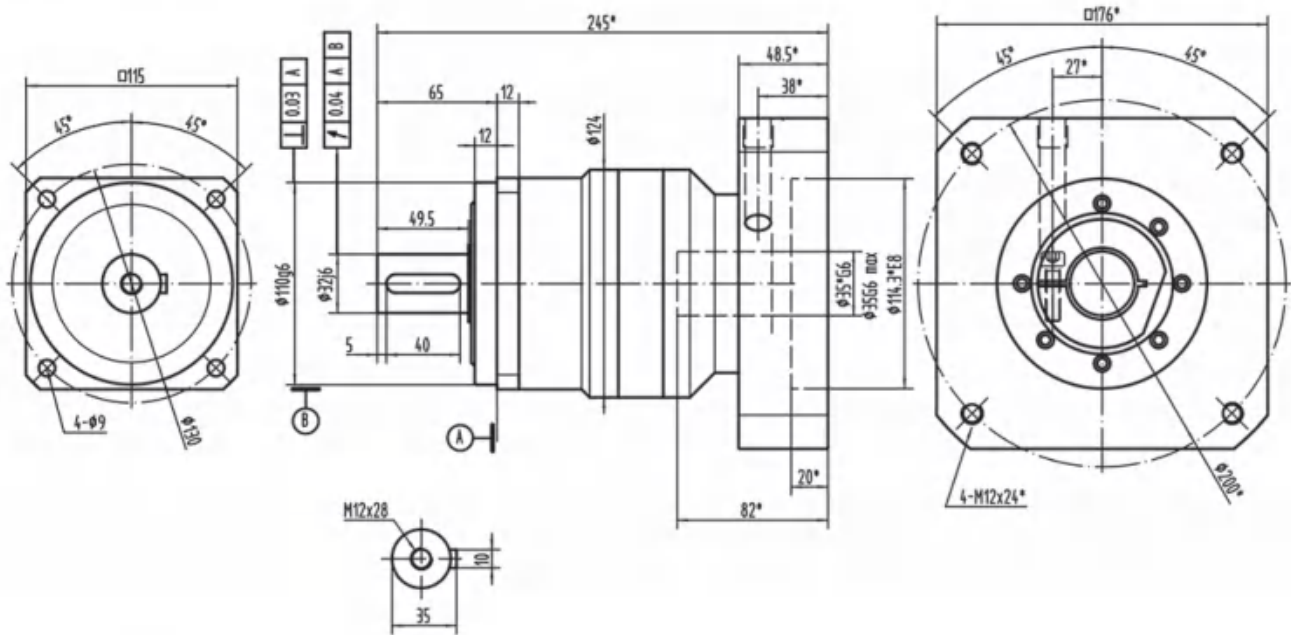

MVB-140-L1

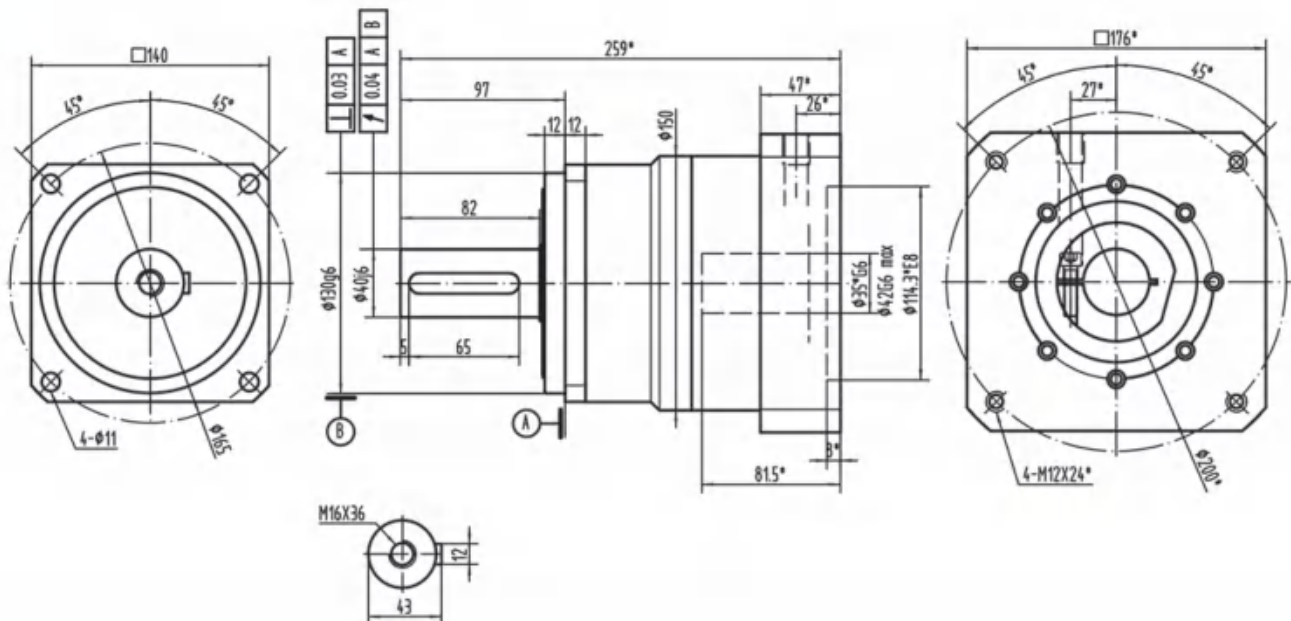


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MVB-140-L2

MVB

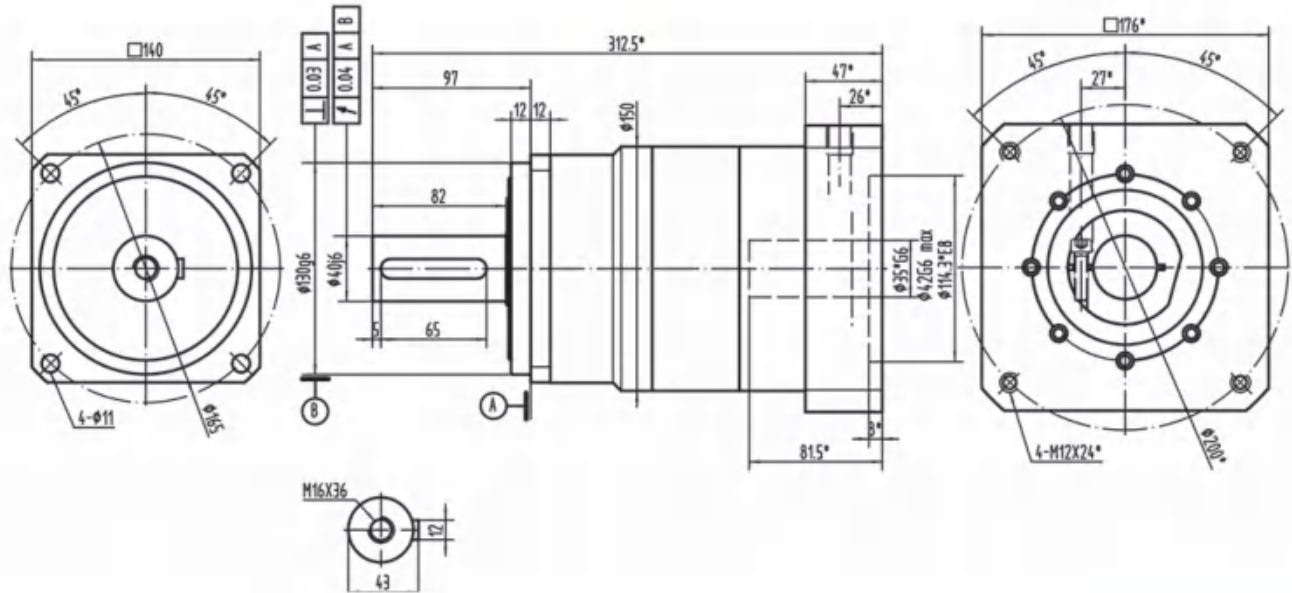


MVB-180-L1

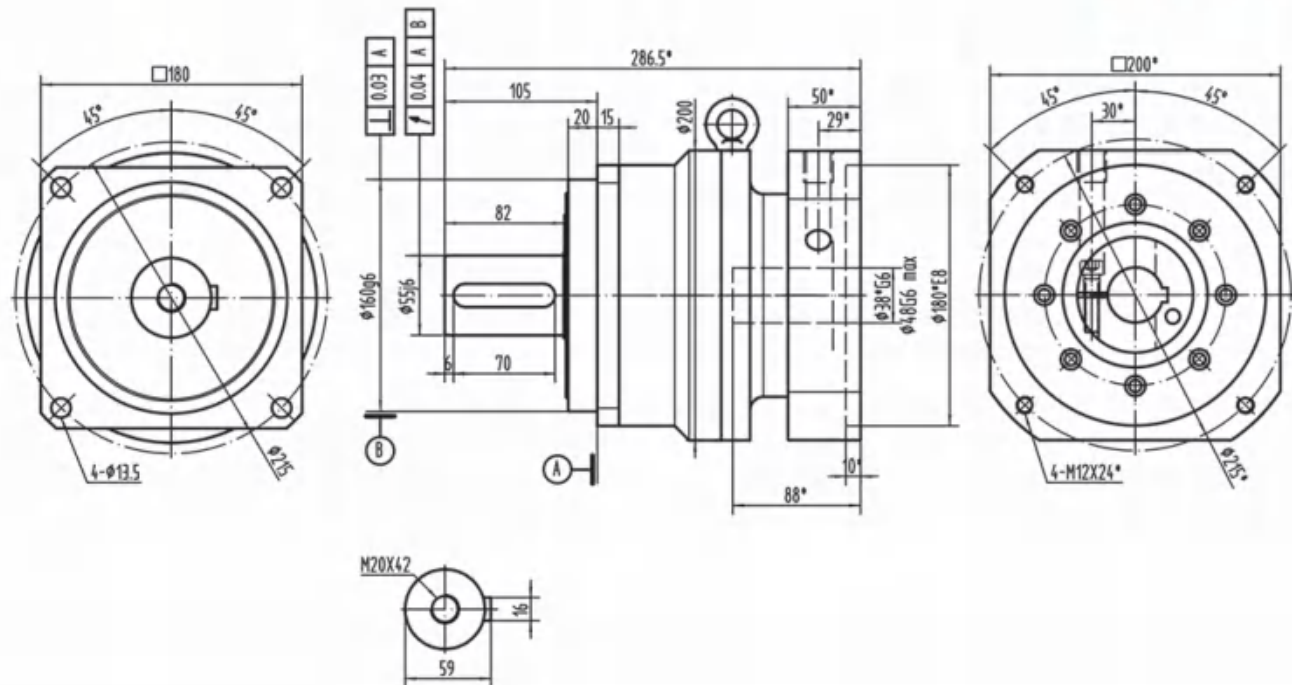


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVB-180-L2


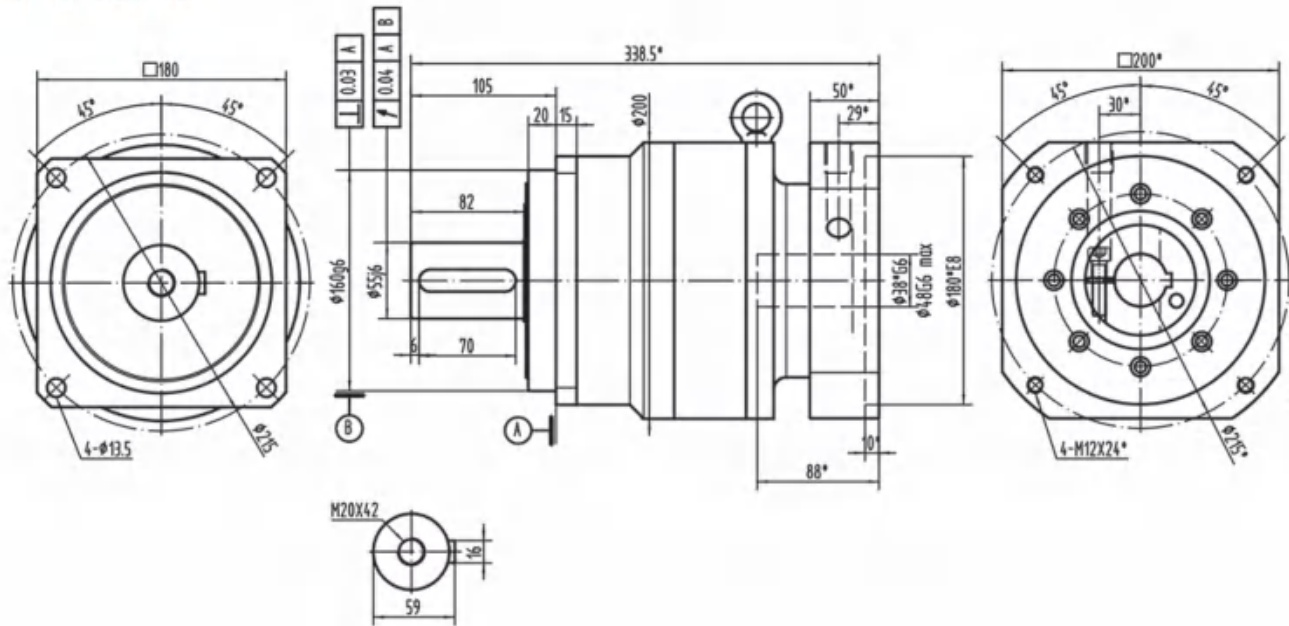


MVB-220-L1

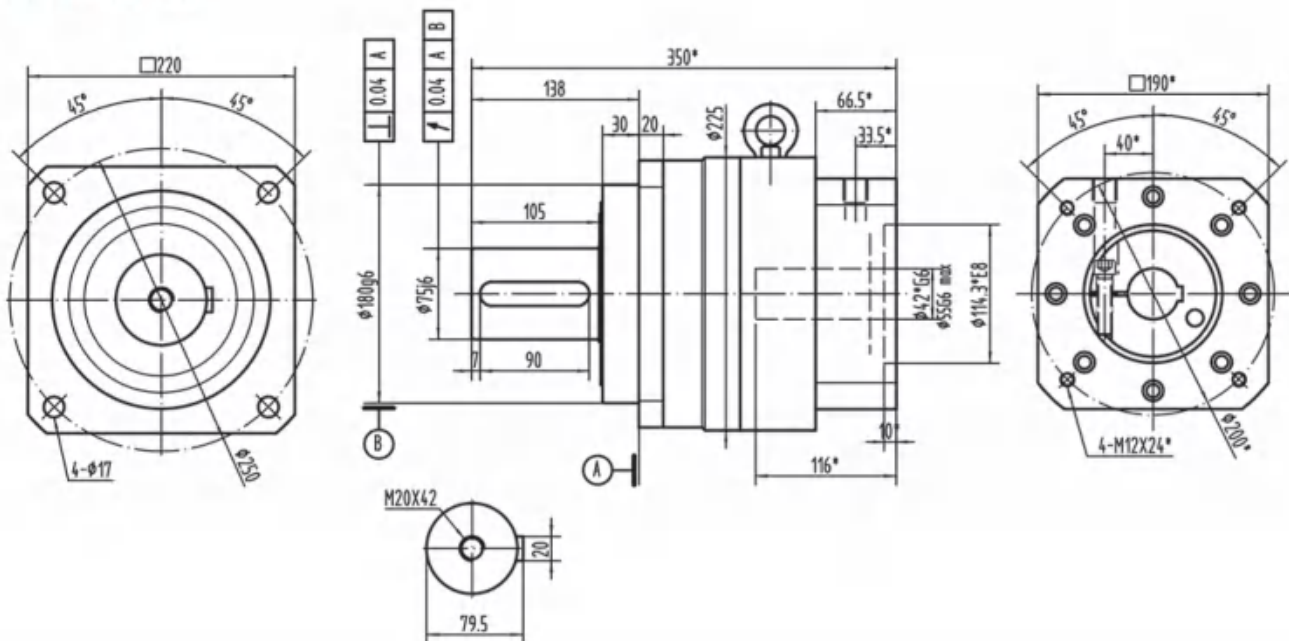


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

MVB-220-L2




Drawing / Size


MVB-240-L2

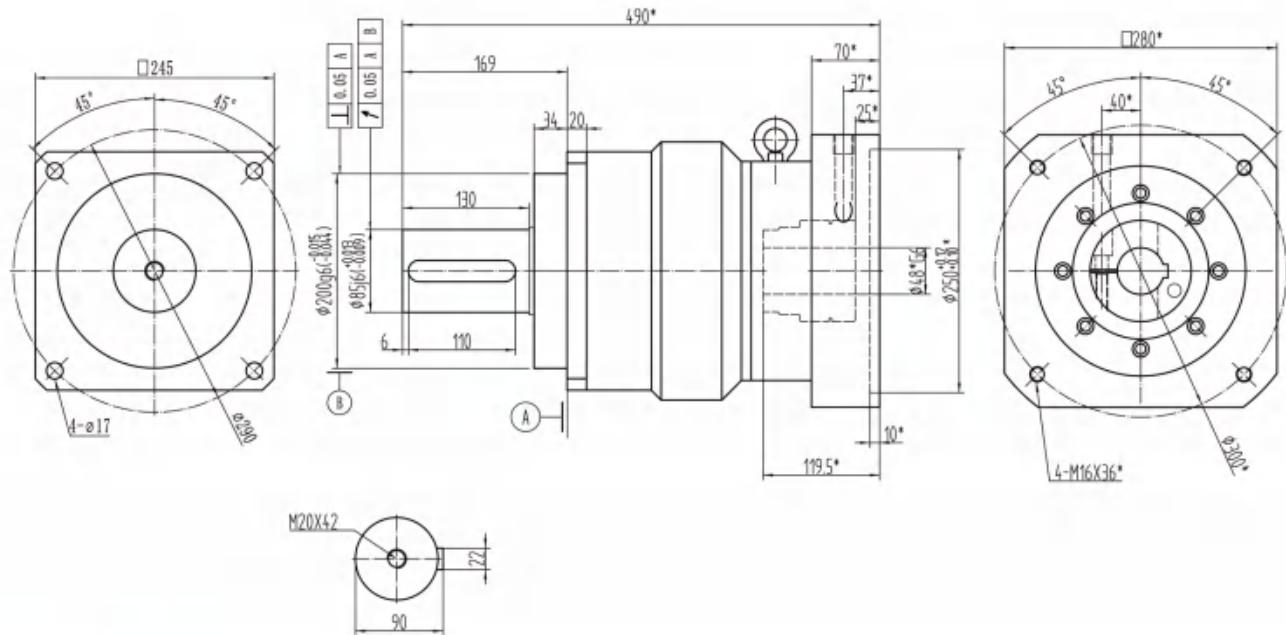

MVB-300-L1

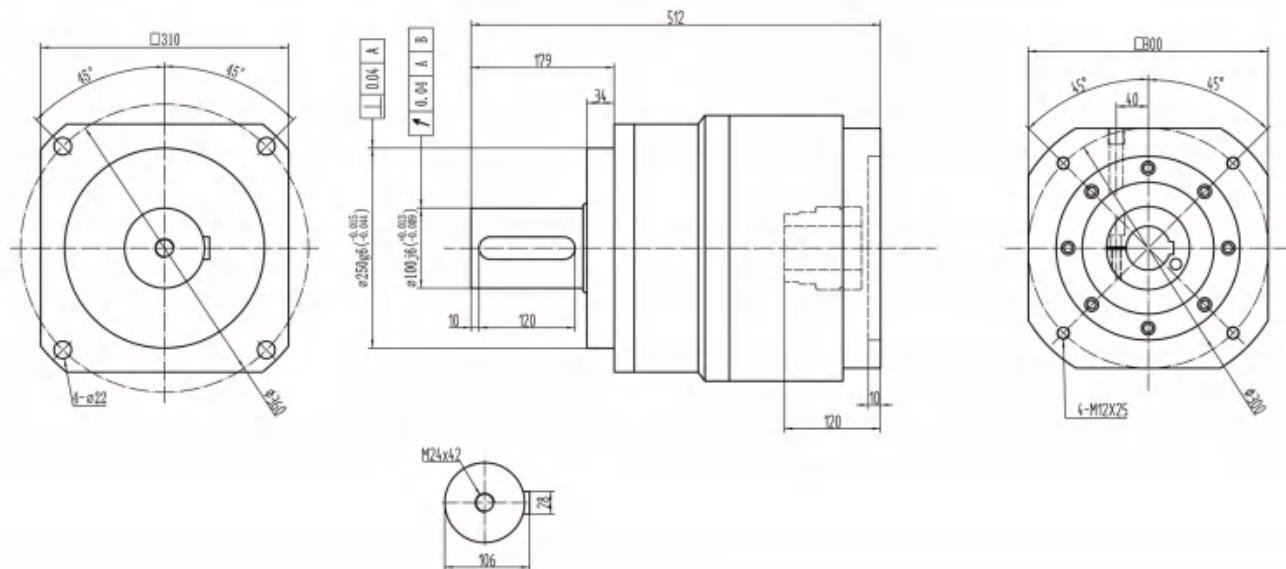

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

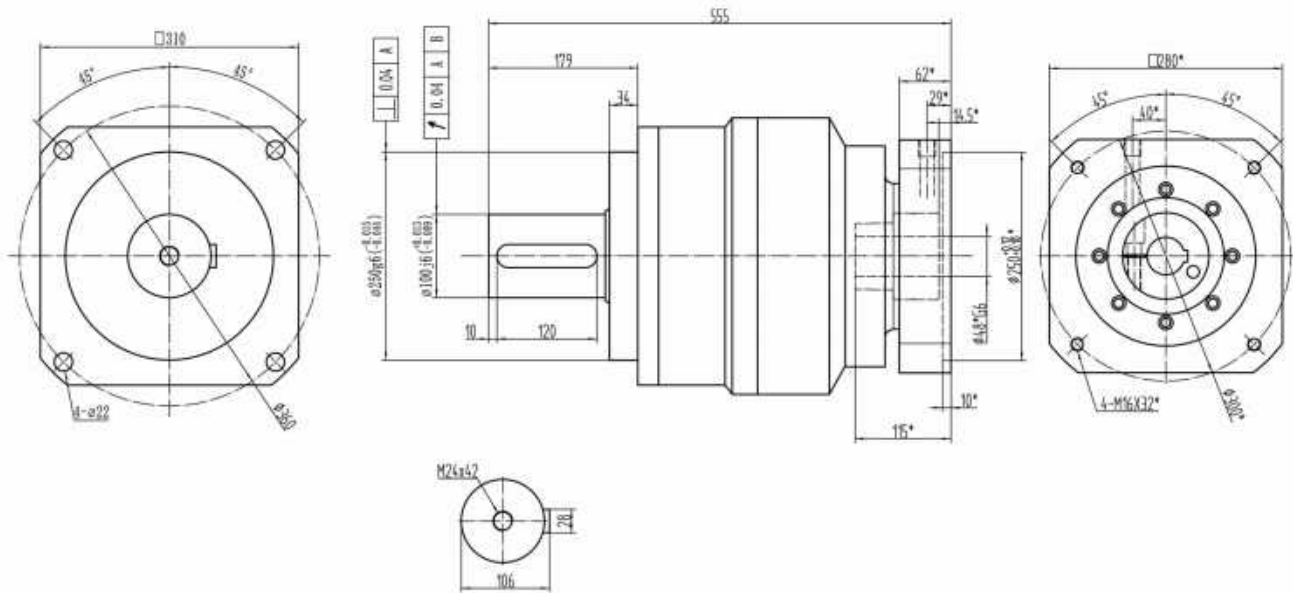

MVB-040																								
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J ₁	C _{2r}	F _{2BMax}	F _{2AMax}	J ₁	η	U _h	T	Lub	PC	MP								
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	℃				dB							
I STAGE	3	14	2×T _{2N}	4000	8000	≤3	3	700	610	0.03	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤63							
	4	14					3																	
	5	20					3																	
	6	20					3																	
	7	20					2.2																	
	8	20					3																	
	9	14					3																	
	10	14					2.2																	
II STAGE	15	14				≤5	3				≥90													
	20	14					3																	
	35	20					3																	
	40	20					3																	
	50	20					3																	
	80	20					3																	
	100	14					2.2																	

*Dimensions based on servo-motor, please contact us for custom made order.
 注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MVB

MVB-060																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2RMMax}	F _{2AMMax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	40	2×T _{2N}	3000	6000	≤3	8	1500	1050	0.16	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤63
	4	45					8			0.14							
	5	60					8			0.13							
	6	55					8			0.13							
	7	55					8			0.13							
	8	55					8			0.13							
	9	40					8			0.13							
	10	40					8			0.13							
II STAGE	15	40				≤5	8			0.13	≥90						
	20	45					8			0.13							
	35	60					8			0.13							
	40	55					8			0.13							
	50	55					8			0.13							
	80	55					8			0.13							
	100	40					8			0.13							

MVB-090																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{2RMMax}	F _{2AMMax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	℃				dB
I STAGE	3	100	2×T _{2N}	3000	6000	≤3	20	3200	2300	0.61	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤67
	4	110					20			0.48							
	5	150					20			0.47							
	6	150					20			0.47							
	7	150					20			0.45							
	8	140					20			0.45							
	9	100					20			0.42							
	10	100					20			0.4							
II STAGE	15	100				≤5	20			0.13	≥90						
	20	110					20			0.13							
	35	150					20			0.13							
	40	150					20			0.13							
	50	150					20			0.13							
	80	140					20			0.13							
	100	100					20			0.13							

Performance table

MVB

MVB-120																				
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{It}	F _{2RMMax}	F _{2AMMax}	J _i	η	L _h	T	Lub	PC	MP				
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB			
I STAGE	3	240	2×T _{2N}	3000	6000	≤3	41	6000	4100	3.25	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤70			
	4	320					41			2.74										
	5	360					41			2.71										
	6	350					41			2.6										
	7	360					41			2.6										
	8	360					41			2.6										
	9	240					41			2.6										
	10	240					41			2.6										
	II STAGE	15					240			≤5								41	0.45	≥90
		20					320											41	0.45	
35		360	41	0.45																
40		360	41	0.45																
50		360	41	0.4																
80		360	41	0.4																
100		240	41	0.4																

MVB-140																							
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2RMMax}	F _{2AMMax}	J ₁	η	L _h	T	Lub	PC	MP							
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	℃				dB						
I STAGE	3	350	2×T _{2N}	3000	6000	≤3	50	9000	8300	9.21	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤72						
	4	550					50			7.54													
	5	600					50			7.42													
	6	600					50			7.42													
	7	600					50			7.14													
	8	550					50			7.14													
	9	380					50			7.08													
	10	380					50			7.03													
II STAGE	15	460				≤5	50			2.63	≥90												
	20	650					50			2.63													
	35	700					50			2.43													
	40	700					50			2.43													
	50	700					50			2.39													
	80	700					50			2.39													
	100	460					50			2.39													

Performance table

MVB

MVB-180																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{200Max}	F _{200Min}	J _i	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	600	2×T _{2N}	2000	4000	≤3	145	14500	13500	28.98	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤75
	4	1000					145			23.67							
	5	1000					145			23.29							
	6	1000					145			22.29							
	7	1000					145			22.48							
	8	1000					145			22.48							
	9	650					145			22.40							
	10	650					145			22.51							
II STAGE	15	980				≤5	145			7.3	≥90						
	20	1350					145			7.3							
	35	1400					145			7.1							
	40	1350					145			6.92							
	50	1400					145			6.92							
	80	1400					145			6.72							
	100	980					145			6.72							

MVB-220																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j _t	C _{2t}	F _{200Max}	F _{200Min}	j _t	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	1100	2×T _{2N}	1500	3000	≤3	225	20500	19000	69.61	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77
	4	1600					225			54.37							
	5	1800					225			53.27							
	6	1800					225			53.27							
	7	1800					225			50.97							
	8	1800					225			50.88							
	9	1200					225			50.73							
	10	1200					225			50.56							
II STAGE	15	1300				≤5	225			22.79	≥90						
	20	1800					225			22.79							
	35	1900					225			22.59							
	40	1900					225			21.83							
	50	1900					225			21.83							
	80	1900					225			21.70							
	100	1300					225			21.60							

Performance table

MVB

MVB-240																										
Symb.	i	T _{2N}	T _{2Net}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2RMMax}	F _{2MMax}	J ₁	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	(Nm/arcmin)	N	N	kgcm ²	%	h	°C				dB									
I STAGE	3	3000	2xT _{2N}	1000	2500	≤3	540	29000	26500	180	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77									
	4	3000								180																
	5	3150								170																
	6	3150								170																
	7	3150								170																
	8	3000								170																
	9	2400								150																
	10	2200								150																
II STAGE	15	3000				≤5				64	≥90															
	20	3000								64																
	25	3150	64																							
	50	3150	64																							
	80	3150	64																							
	100	2300	64																							

MVB-300																										
Symb.	i	T _{2N}	T _{2Net}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2RMMax}	F _{2MMax}	J ₁	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB									
I STAGE	3	8150	2×T _{2N}	2000	3000	≤3	980	224500	112000	252.96	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤75									
	4	8730								230.72																
	5	8660								226.05																
	7	8520								216.29																
	10	8310								214.55																
II STAGE	15	8150				≤5				185.05	≥90															
	20	8730								185.05																
	25	8660								185.05																
	35	8520								183.43																
	40	8440								183.43																
	50	8660								183.43																
	70	8520								177.26																
	100	8310								175.39																

MVE SERIES



专门为频繁反复和紧急加速而设计，MVE系列可提供高精度、高刚性和高扭矩。
Powerful, robust and precise, this planetary gearbox is designed to work under heavy operating duty.



造型数据:


Selection data:

扭矩 (Nm)	14-1900
速比	3-100
背隙 (arcmin)	3-5
最大工作温度 (°C)	90
噪音 (dB)	63-77


Nominal output torque (Nm)	14-1900
Reduction ratio	3-100
Backlash (arcmin)	3-5
Max.working temperature (°C)	90
Noise (dB)	63-77

Drawing / Size

MVE-040-L1

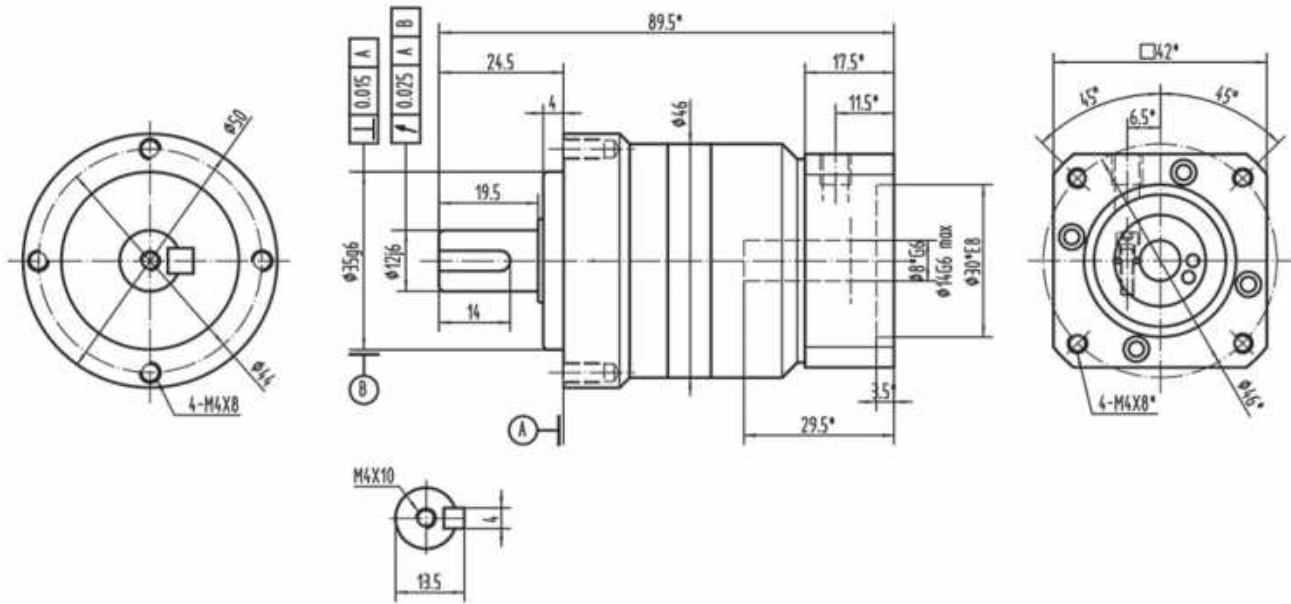


MVE-040-L2

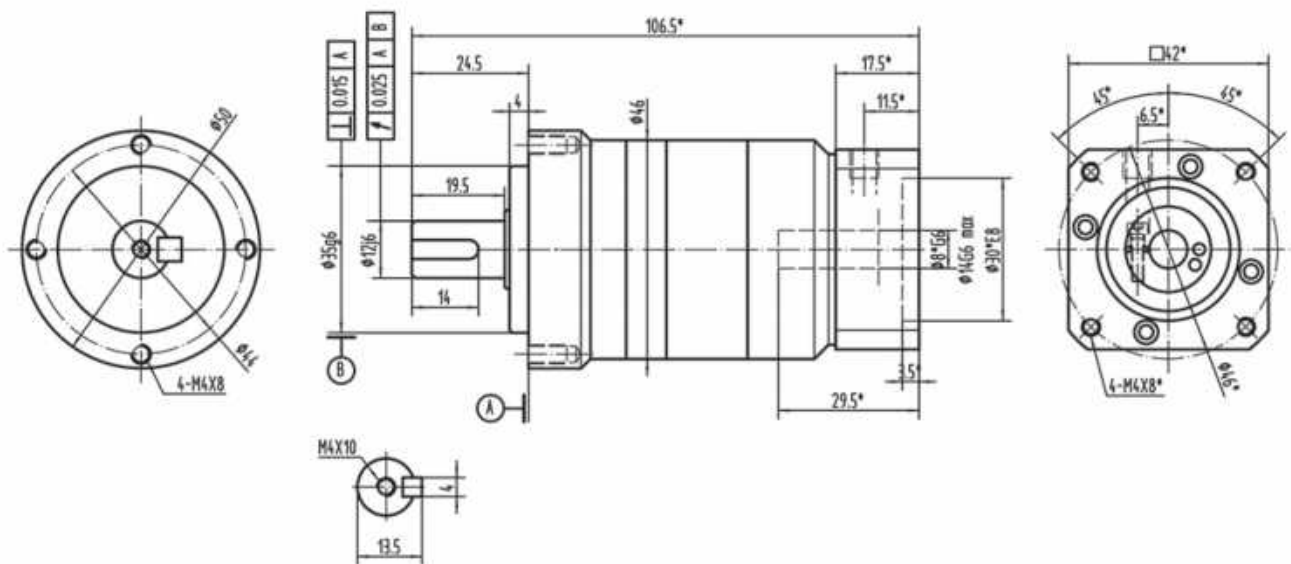


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVE-060-L1

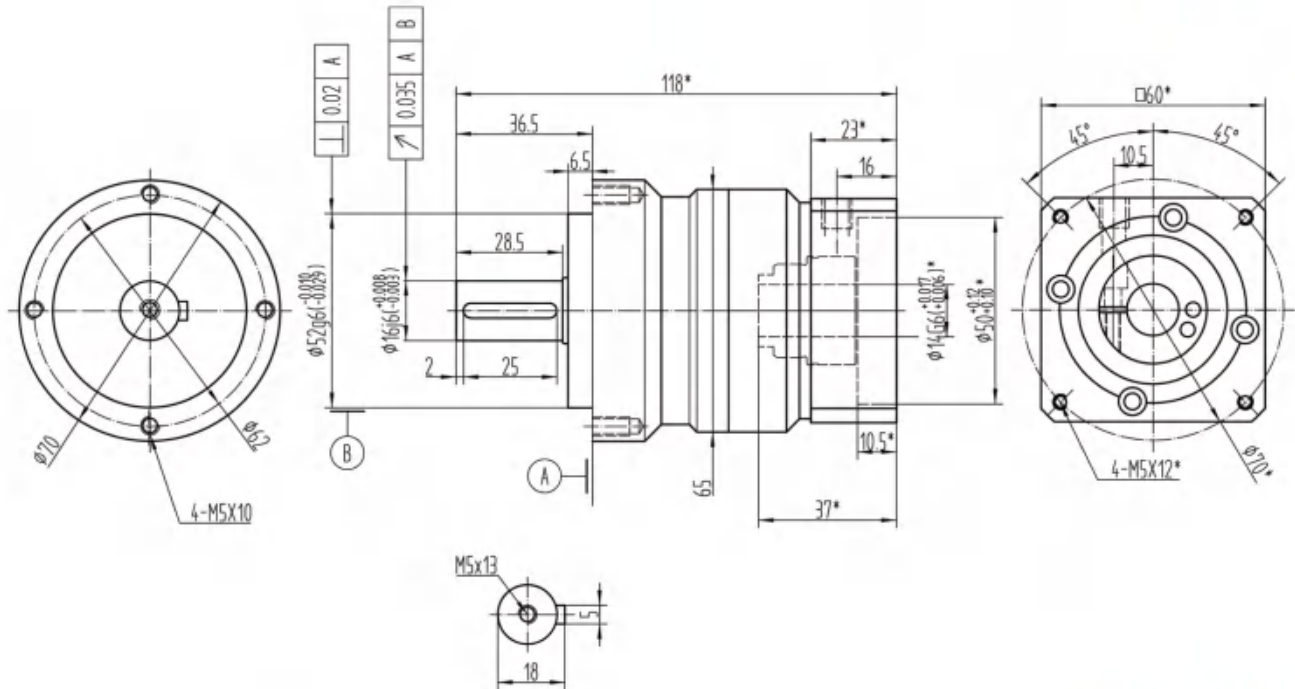


MVE-060-L2

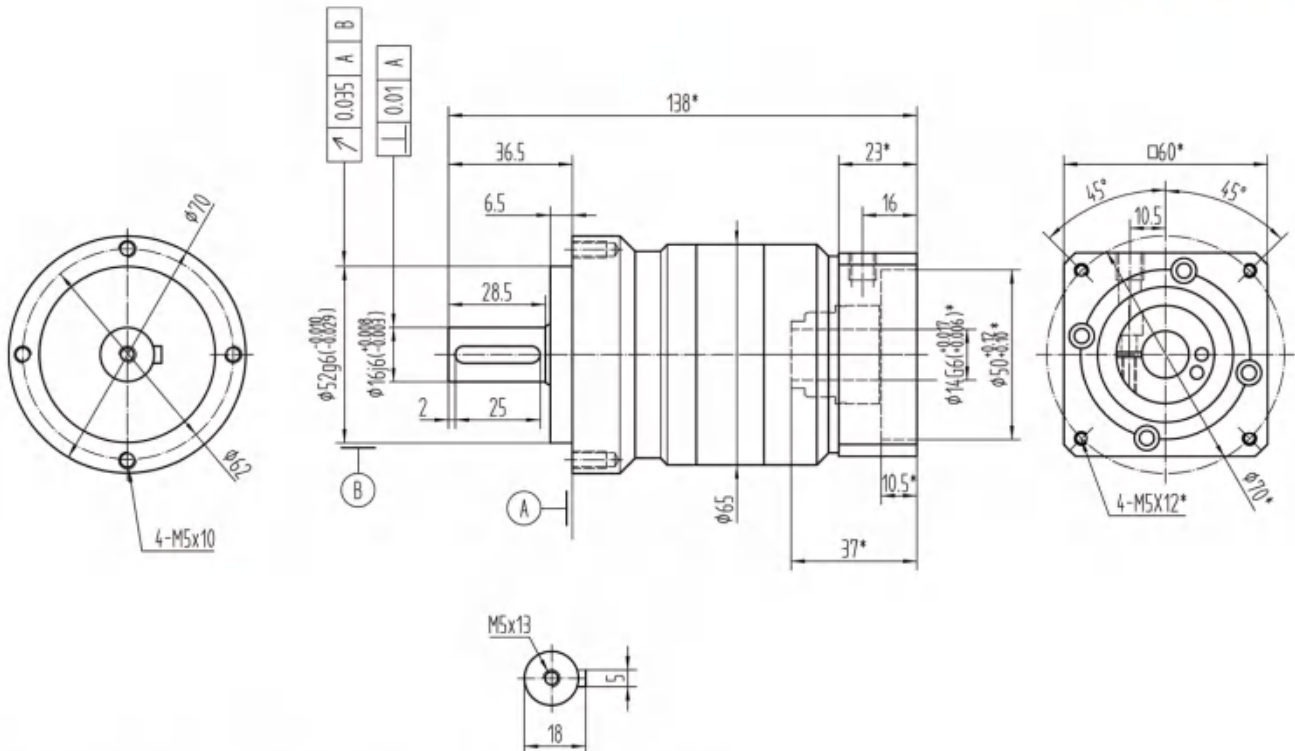


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVE-090-L1

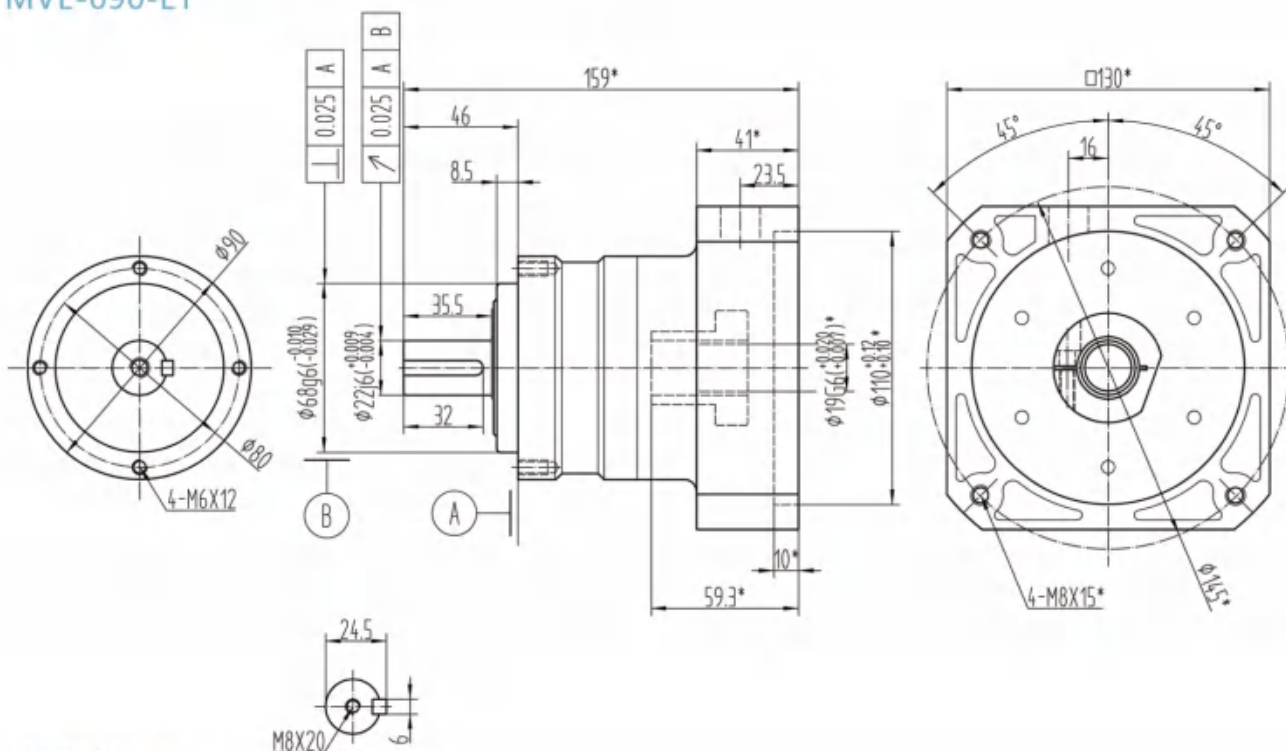


MVE-090-L2

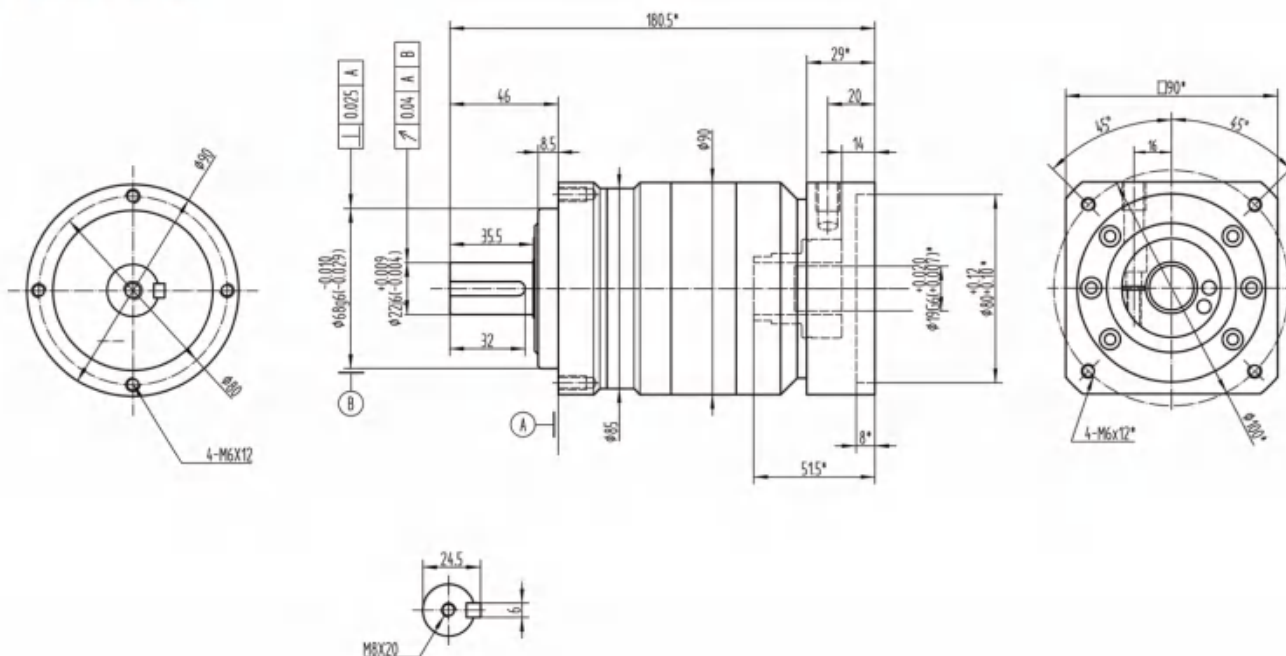


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVE-120-L1

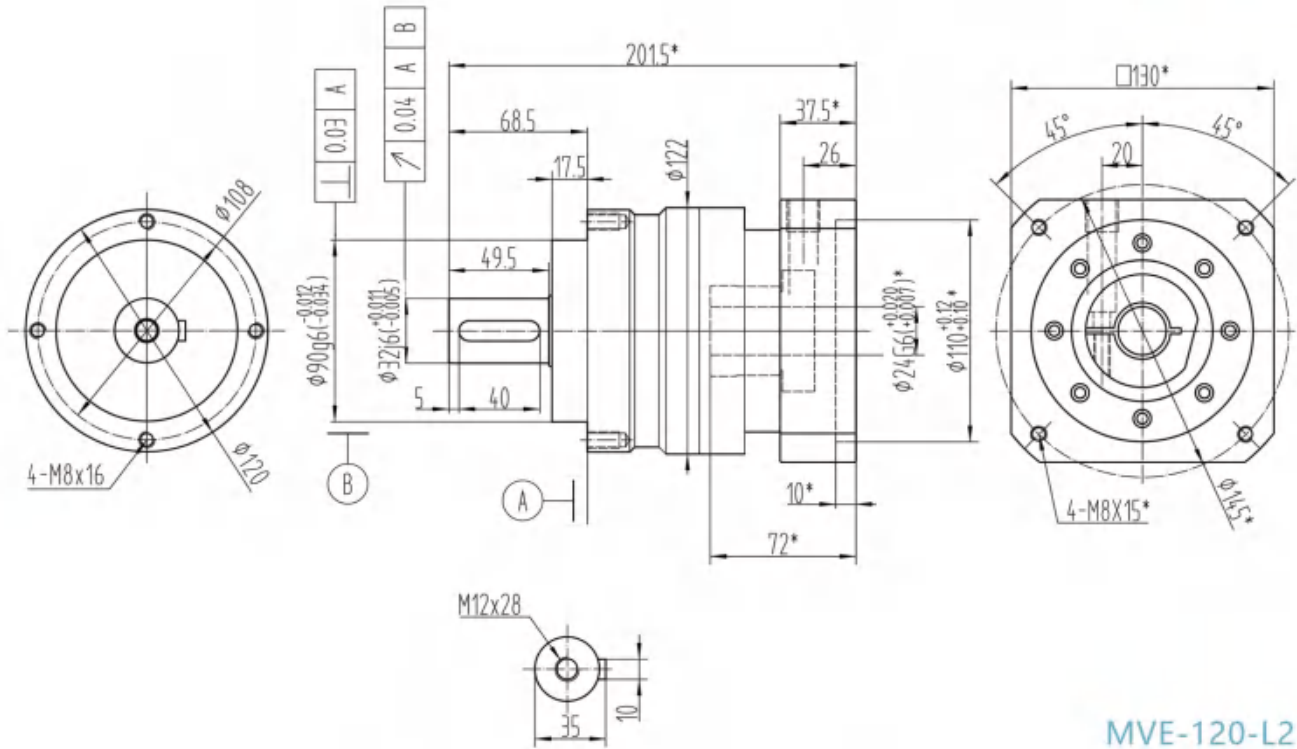


MVE-120-L2

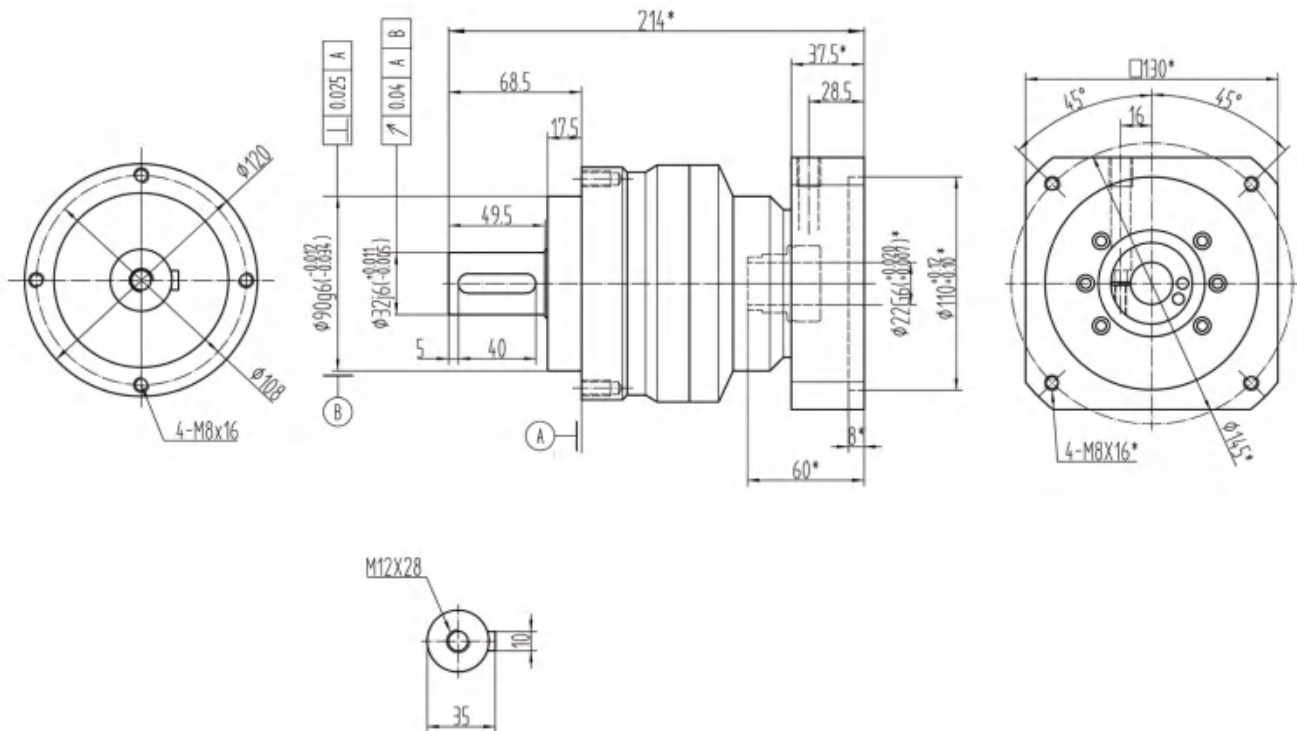


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

MVE-155-L2
(Smaller hole)

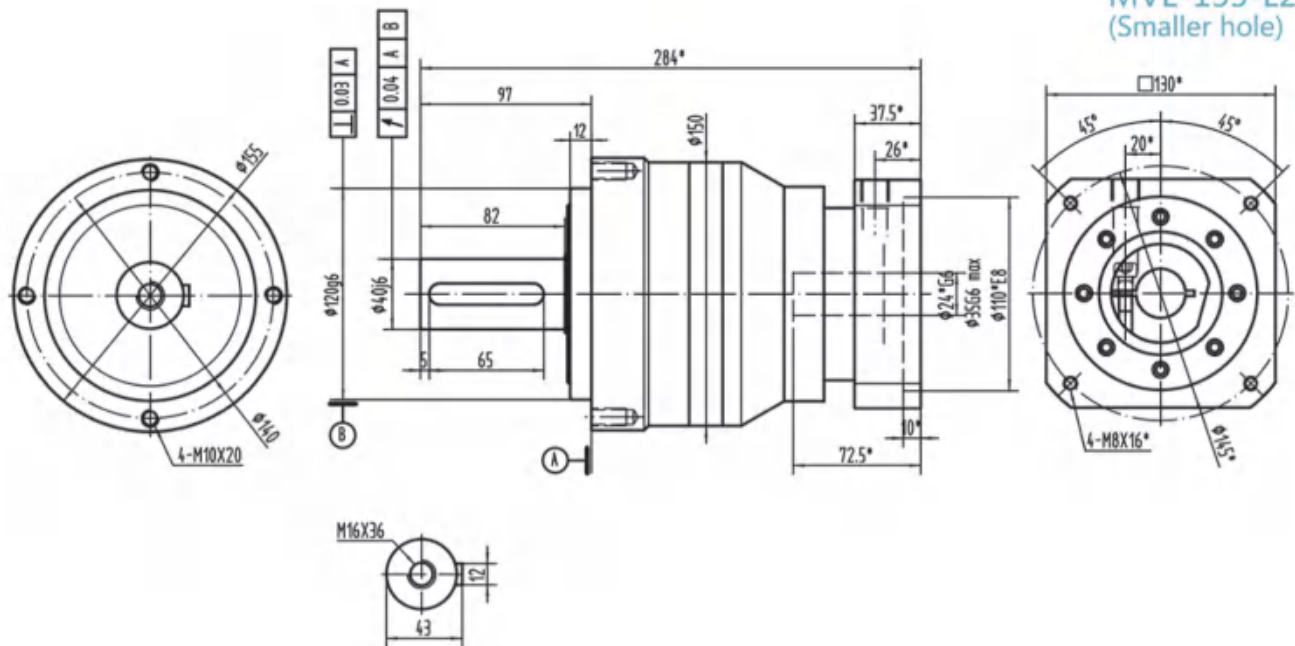


MVE-205-L1

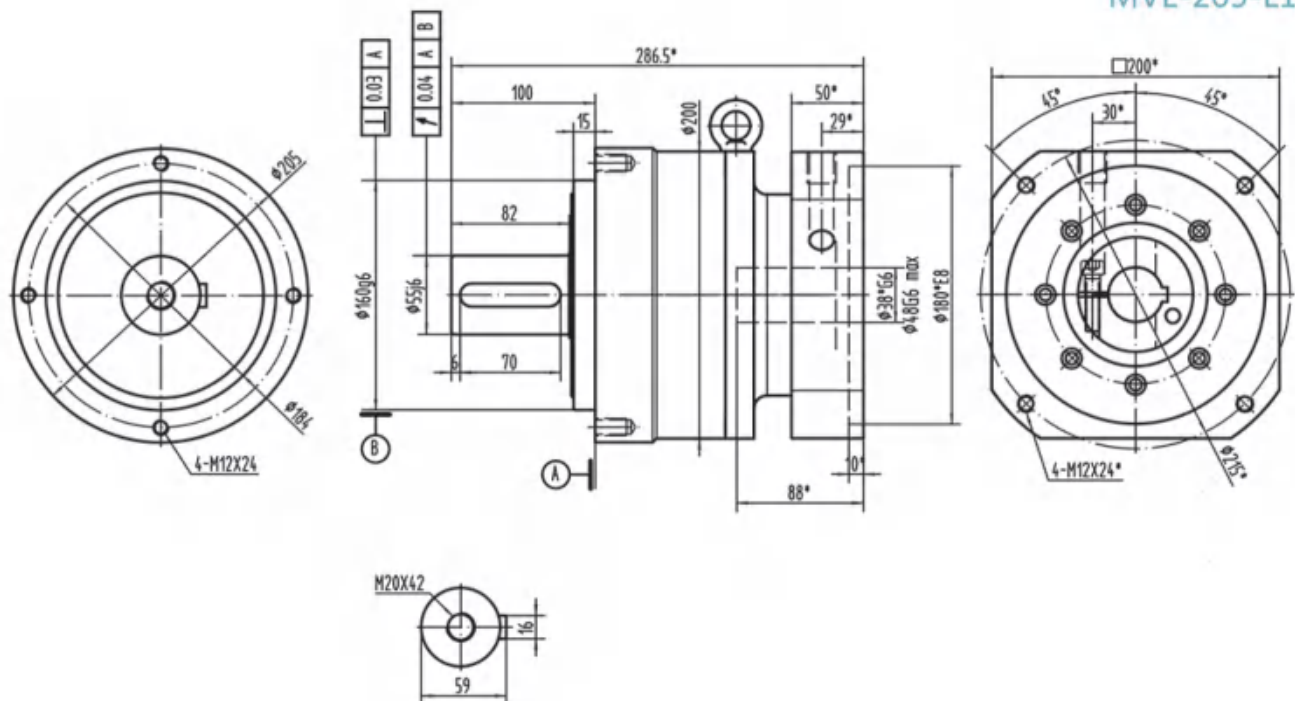


*Dimensions based on servo-motor, please contact us for custom made order.
注有*尺寸:代表可根据客户需求定制产品,如有需要,请联系我们!

Drawing / Size

MVE-205-L2

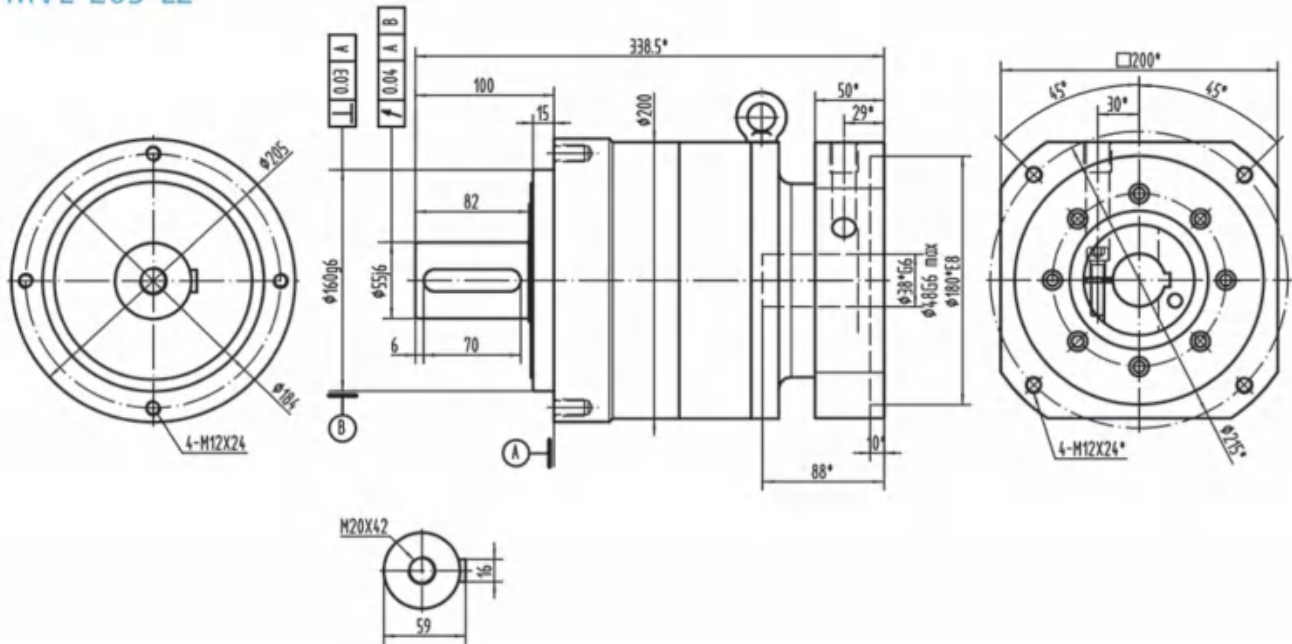


MVE-205-L2 (Smaller hole)

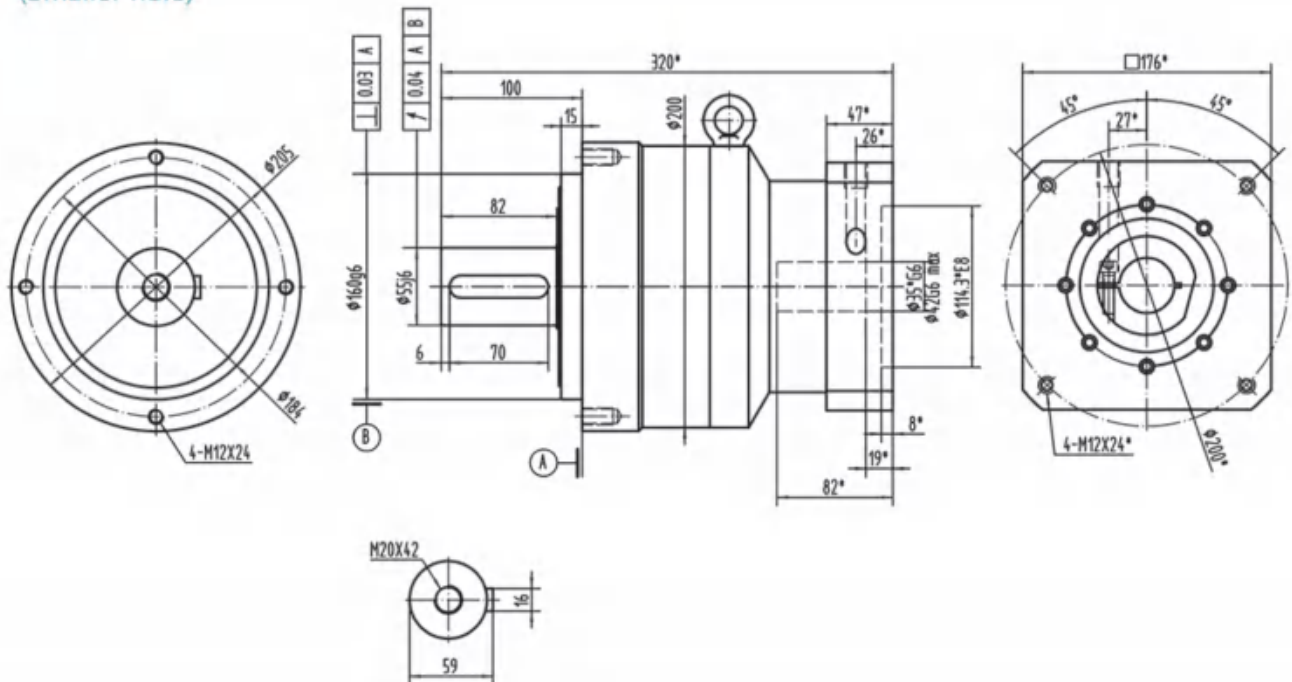

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MVE-235-L2

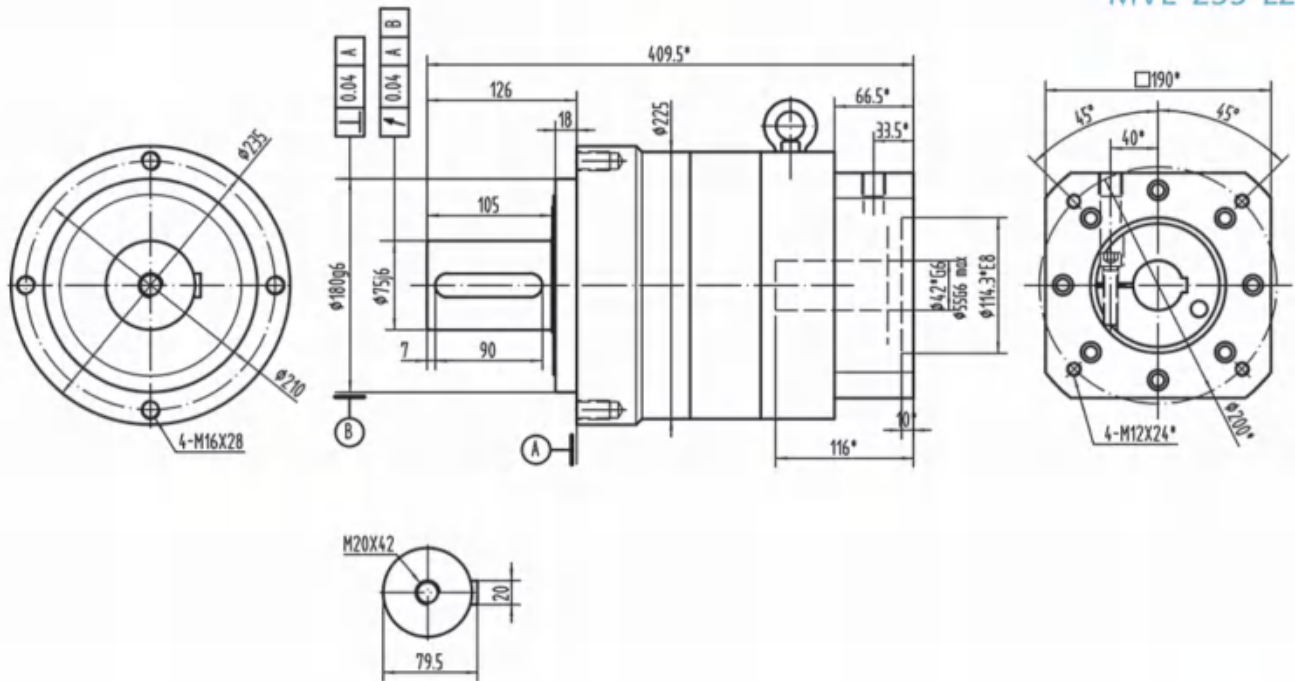

MVE


MVE-270-L1

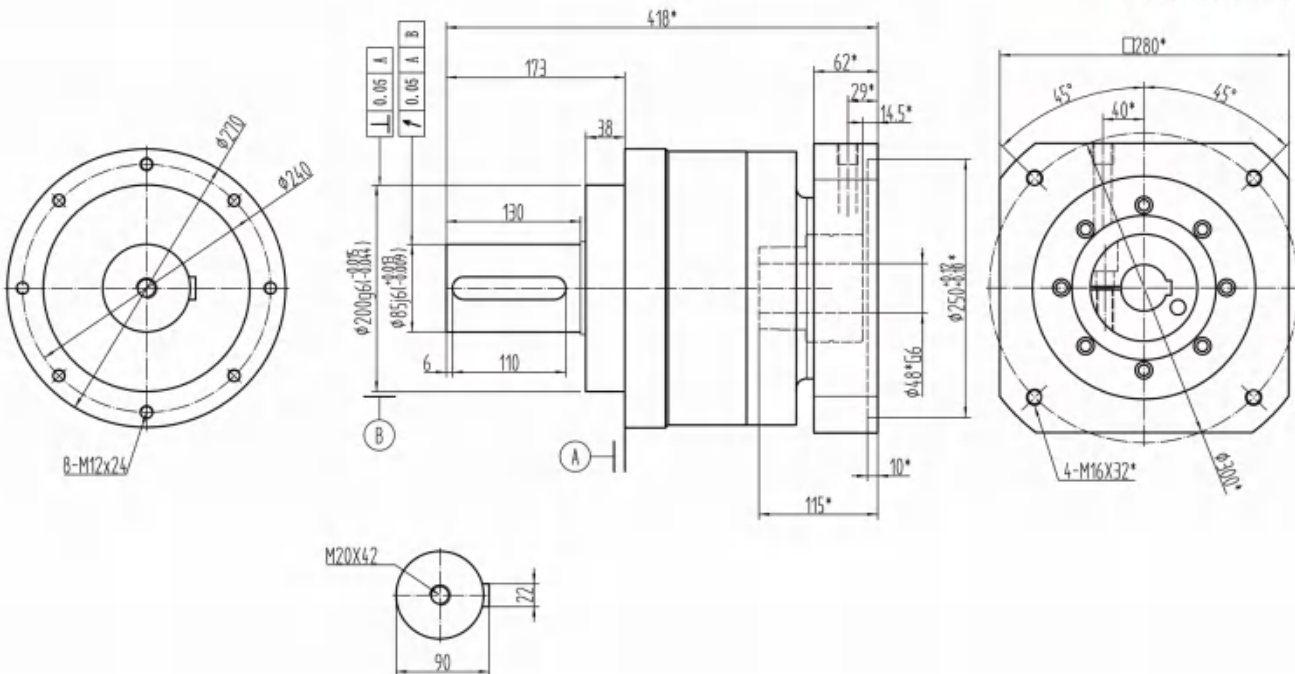


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVE-270-L2

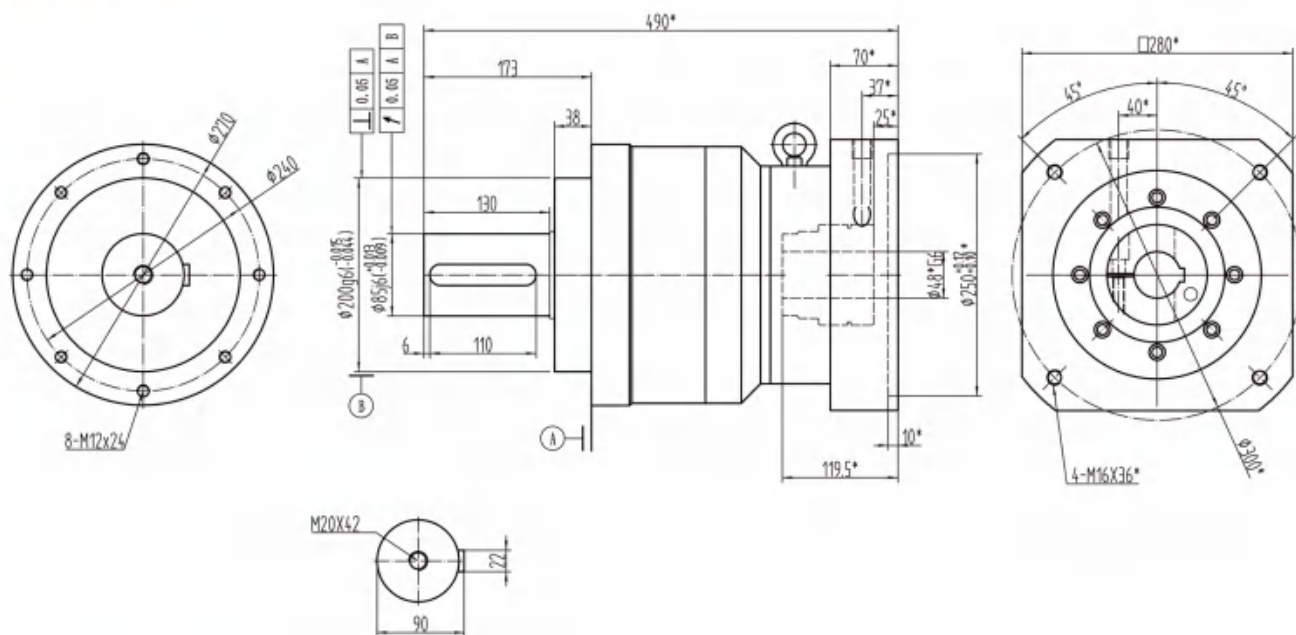


MVE-330-L1

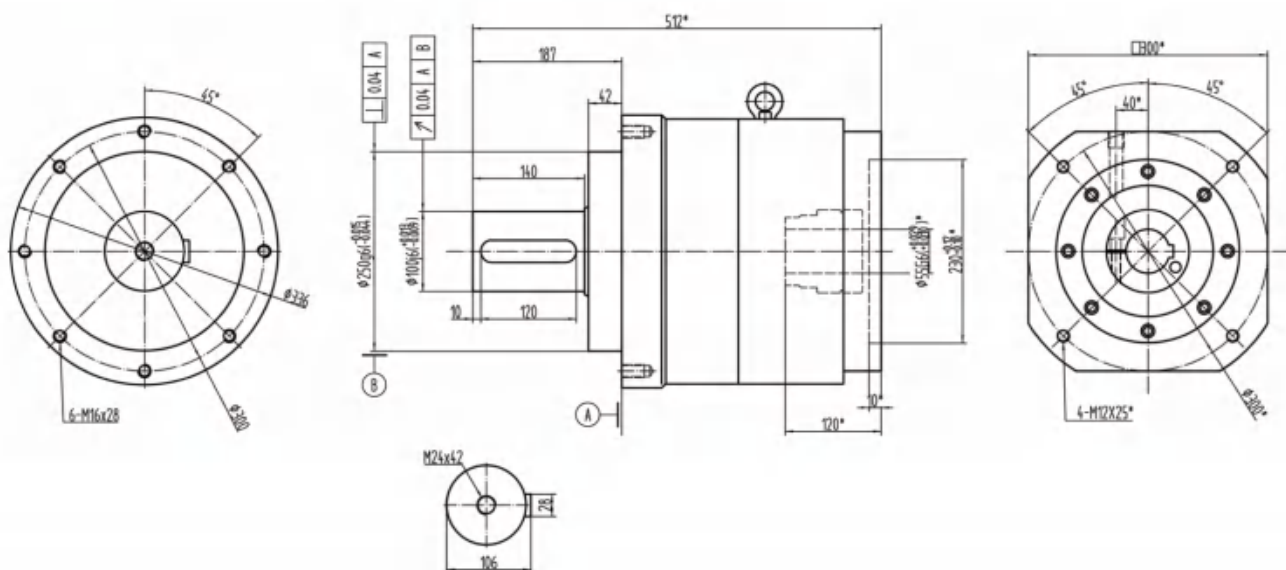

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVE-330-L2

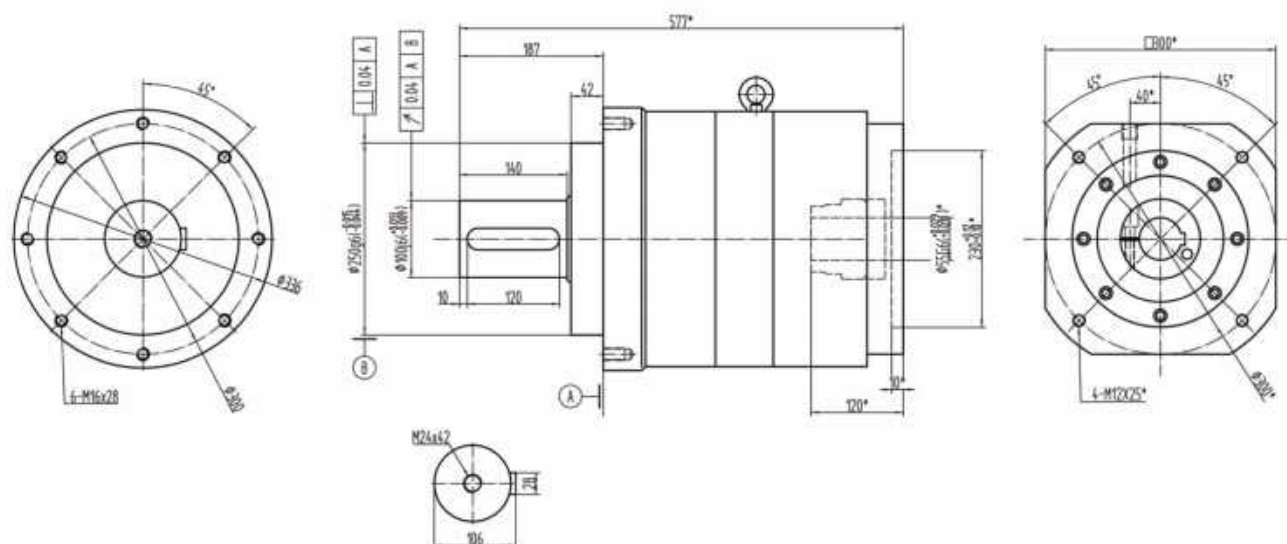

MVE-040																							
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{2N} rpm	n _{1Max} rpm	j ₁ arcmin	C ₂ Nm/arcmin	F _{2RM} N	F _{2MM} N	j ₁ kgcm ²	η %	L ₁ h	T °C	Lub	PC	MP							
I STAGE	3	14	2×T _{2N}	4000	8000	≤3	3	700	610	0.03	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤63						
	4	14					3																
	5	20					3																
	6	20					3																
	7	20					2.2																
	8	20					3																
	9	14					3																
	10	14					2.2																
II STAGE	15	14				≤5	3				≥90												
	20	14					3																
	35	20	3																				
	40	20	3																				
	50	20	3																				
	80	20	3																				
	100	14	2.2																				

*Dimensions based on servo-motor, please contact us for custom made order.

注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MVE

MVE-060																	
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	J _i arcmin	C _{2t} Nm/arcmin	F _{2RMMax} N	F _{2AMMax} N	J _i kgcm ²	η %	L _h h	T °C	Lub	PC	MP	dB
I STAGE	3	40	2×T _{2N}	3000	6000	≤3	8	1500	1050	0.16	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤63
	4	45					8			0.14							
	5	60					8			0.13							
	6	55					8			0.13							
	7	55					8			0.13							
	8	55					8			0.13							
	9	40					8			0.13							
	10	40					8			0.13							
II STAGE	15	40				≤5	8			0.13	≥90						
	20	45					8			0.13							
	35	60					8			0.13							
	40	55					8			0.13							
	50	55					8			0.13							
	80	55					8			0.13							
	100	40					8			0.13							

MVE-090																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J ₁	C _{2t}	F _{2RMMax}	F _{2AMMax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	℃				dB
I STAGE	3	100	2×T _{2N}	3000	6000	≤3	20	3200	2300	0.61	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤67
	4	110					20			0.48							
	5	150					20			0.47							
	6	150					20			0.47							
	7	150					20			0.45							
	8	140					20			0.45							
	9	100					20			0.42							
	10	100					20			0.4							
II STAGE	15	100				≤5	20			0.13	≥90						
	20	110					20			0.13							
	35	150					20			0.13							
	40	150					20			0.13							
	50	150					20			0.13							
	80	140					20			0.13							
	100	100					20			0.13							

Performance table

MVE

MVE-120																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J ₁	C _{2t}	F _{20Max}	F _{2Max}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arc/min	mm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	240	2×T _{2N}	3000	6000	≤3	41	6000	4100	3.25	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤70
	4	320					41			2.74							
	5	360					41			2.71							
	6	350					41			2.6							
	7	360					41			2.6							
	8	360					41			2.6							
	9	240					41			2.6							
	10	240					41			2.6							
II STAGE	15	240				≤5	41			0.45	≥90						
	20	320					41			0.45							
	35	360					41			0.45							
	40	360					41			0.45							
	50	360					41			0.4							
	80	360					41			0.4							
	100	240					41			0.4							

MVE-155																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J ₁	C _{2t}	F _{20Max}	F _{2Max}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	mm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	350	2×T _{2N}	3000	6000	≤3	50	9000	8300	9.21	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤72
	4	550					50			7.54							
	5	600					50			7.42							
	6	600					50			7.42							
	7	600					50			7.14							
	8	550					50			7.14							
	9	380					50			7.08							
	10	380					50			7.03							
II STAGE	15	460				≤5	50			2.63	≥90						
	20	650					50			2.63							
	35	700					50			2.43							
	40	700					50			2.43							
	50	700					50			2.39							
	80	700					50			2.39							
	100	460					50			2.39							

Performance table

MVE

MVE-205																	
Symb.	i	T _{2N}	T _{2Hot}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{205Max}	F _{2Max}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	600	2×T _{2N}	2000	4000	≤3	145	14500	13500	28.98	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤75
	4	1000					145			23.67							
	5	1000					145			23.29							
	6	1000					145			22.29							
	7	1000					145			22.48							
	8	1000					145			22.48							
	9	650					145			22.40							
	10	650					145			22.51							
II STAGE	15	980				≤5	145			7.3	≥90						
	20	1350					145			7.3							
	35	1400					145			7.1							
	40	1350					145			6.92							
	50	1400					145			6.92							
	80	1400					145			6.72							
	100	980					145			6.72							

MVE-235																		
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{235Max}	F _{2Max}	J ₁	η	L _h	T	Lub	PC	MP		
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB	
I STAGE	3	1100	2×T _{2N}	1500	3000	≤3	225	20500	19000	69.61	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77	
	4	1600					225			54.37								
	5	1800					225			53.27								
	6	1800					225			53.27								
	7	1800					225			50.97								
	8	1800					225			50.88								
	9	1200					225			50.73								
	10	1200					225			50.56								
II STAGE	15	1300				≤5	225			22.79	≥90							
	20	1800					225			22.79								
	35	1900					225			22.59								
	40	1900					225			21.83								
	50	1900					225			21.83								
	80	1900					225			21.70								
	100	1300					225			21.60								

Performance table

MVE

MVE-270																				
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	J _t arcmin	C _t Nm/arcmin	F _{2PMax} N	F _{2HMax} N	J _t kgcm ²	η %	L _h h	T °C	Lub	PC	MP	dB			
I STAGE	3	3000	2xT _{2N}	1000	2500	≤3	540	29000	26500	180	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77			
	4	3000								180										
	5	3150								170										
	6	3150								170										
	7	3150								170										
	8	3000								170										
	9	2400								150										
	10	2200								150										
II STAGE	15	3000				≤5				64	≥90									
	20	3000								64										
	25	3150	64																	
	50	3150	64																	
	80	3150	64																	
	100	2300	64																	

MVE-330																										
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	J _t arcmin	C _{2t} Nm/arcmin	F _{2PMax} N	F _{2Max} N	J _t kgcm ²	η %	L _h h	T °C	Lub	PC	MP	dB									
I STAGE	3	8150	2×T _{2N}	2000	3000	≤3	980	224500	112000	252.96	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤75									
	4	8730								230.72																
	5	8660								226.05																
	7	8520								216.29																
	10	8310								214.55																
II STAGE	15	8150				≤5				185.05	≥90															
	20	8730								185.05																
	25	8660								185.05																
	35	8520								183.43																
	40	8440								183.43																
	50	8660								183.43																
	70	8520								177.26																
	100	8310								175.39																

MVD SERIES



MVD高端系列代表最高精度、最大扭矩和轴向/径向负载抗力。

The MVD high-end series symbolize optimum precision, maximum torque and resistance to radial & axial loads.

1 High performance oil seal 优化精选油封


- Increased efficiency due to lowered friction
减小摩擦，增加传动效率
- IP65 enclosure enables continuous duty operation up to 90°C
IP65防护等级，保证至90度的可持续运转

2 Tapered roller bearings 圆锥滚子轴承

- Ensuring a maximal radial and axial load acceptance.
实现最大承载能力

3 Helical teeth 斜齿

- Optimized power transmission
提高传动效率
- Low noise
低噪音
- Improved precision
精度高

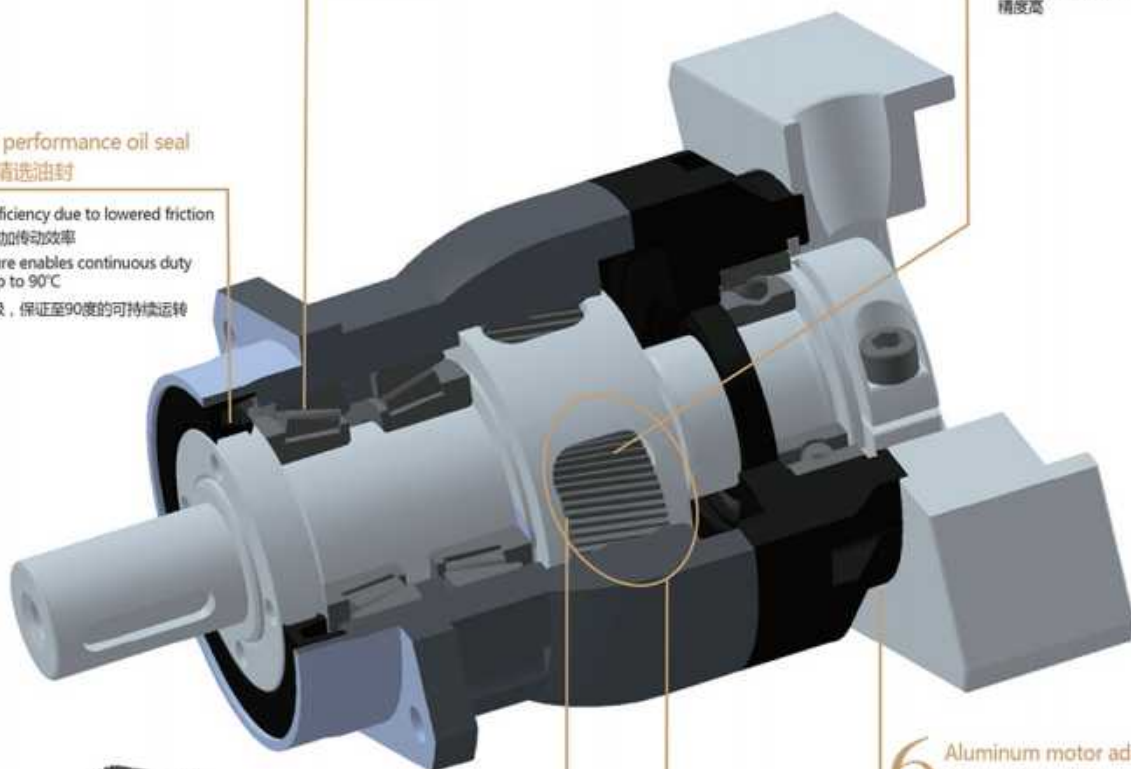

4 Needle rollers 滚针

- Increased radial load capacity
提高径向负载能力
- Small Volume
体积小

5 Cage designed shaft 框架设计

- High torsional stiffness
增加扭转力矩
- Optimized power transmission
优化动力传输

6 Aluminum motor adapter 特种铝材输入端面

- Lower gearbox weight
减轻自重

造型数据:


Selection data:

扭矩 (Nm)	25-2550
速比	3-100
背隙 (arcmin)	3-5
最大工作温度 (°C)	90
噪音 (dB)	60-77


Nominal output torque (Nm)	25-2550
Reduction ratio	3-100
Backlash (arcmin)	3-5
Max.working temperature (°C)	90
Noise (dB)	60-77

Drawing / Size

MVD-060-L1

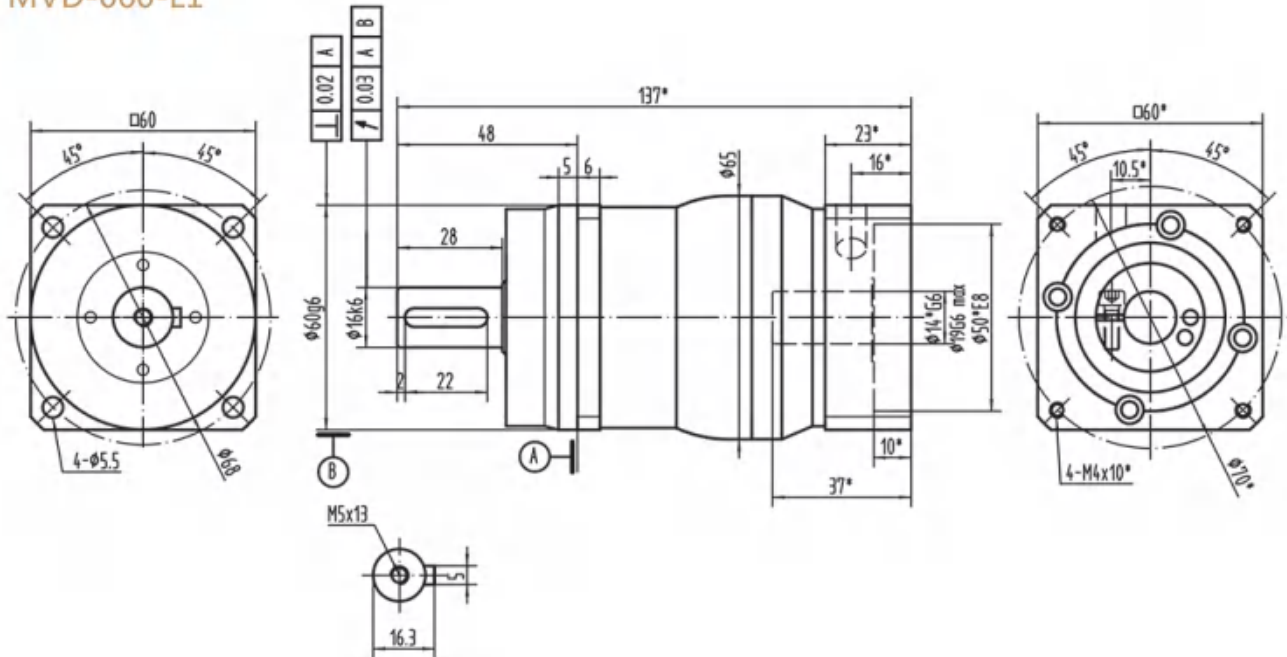


MVD-060-L2

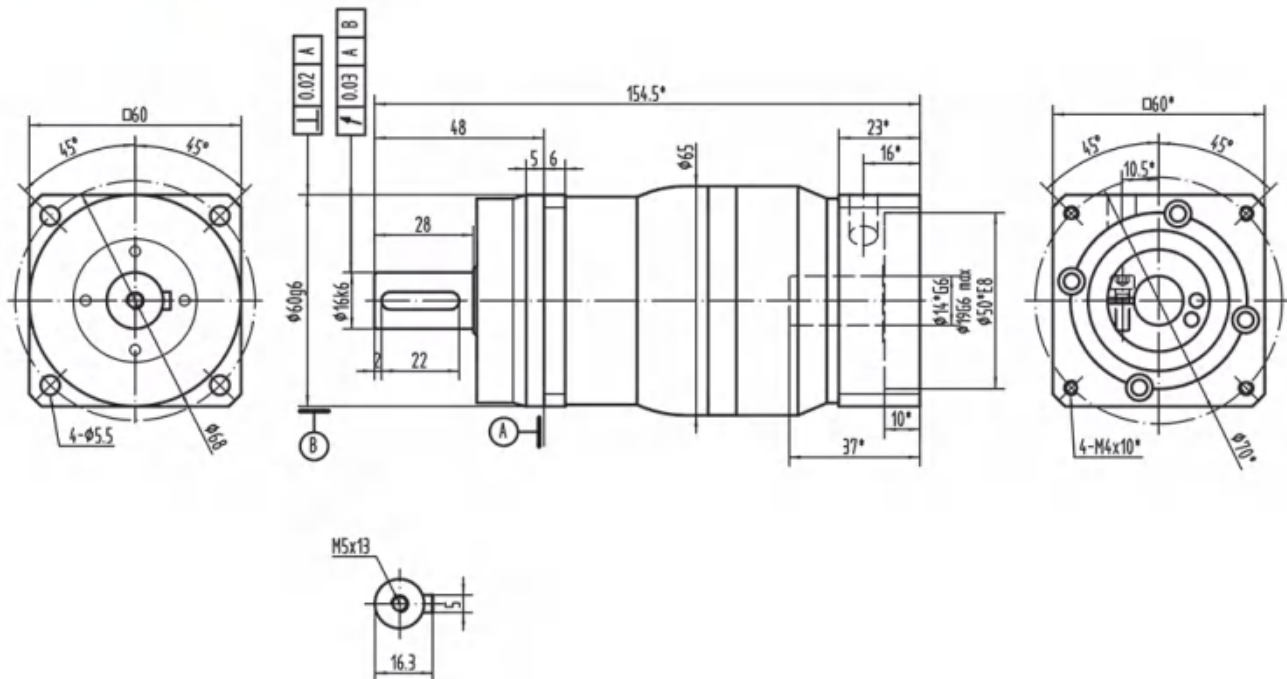


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVD-075-L1


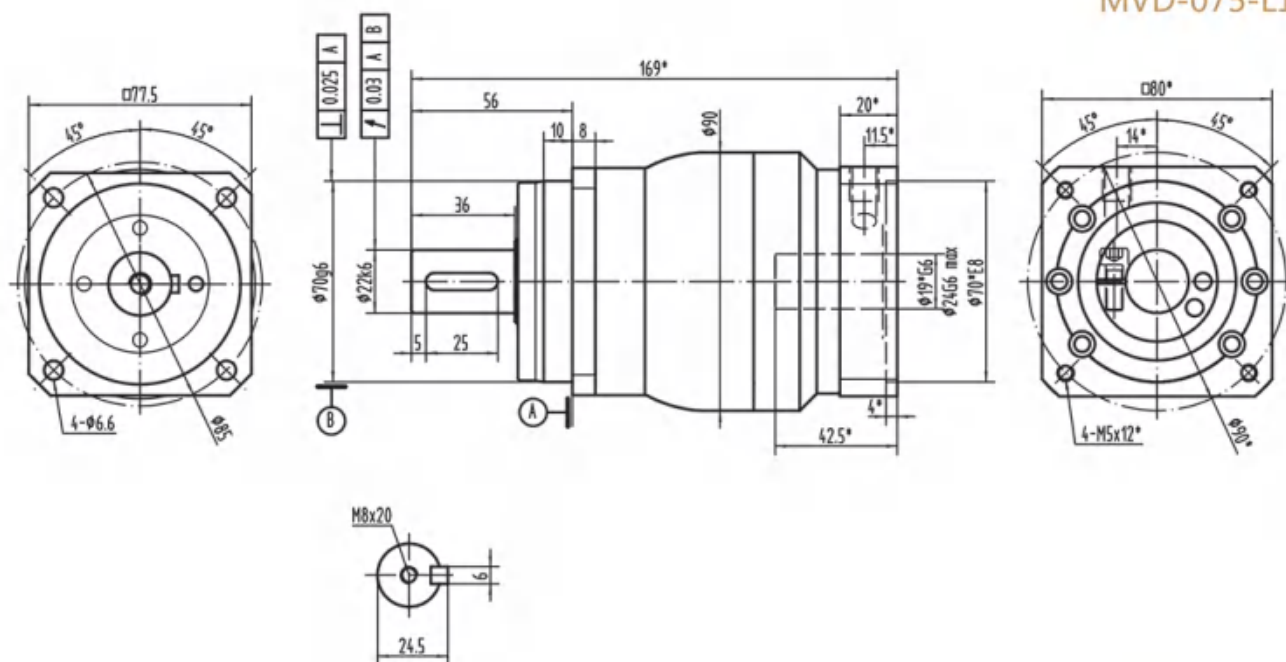


MVD-075-L2

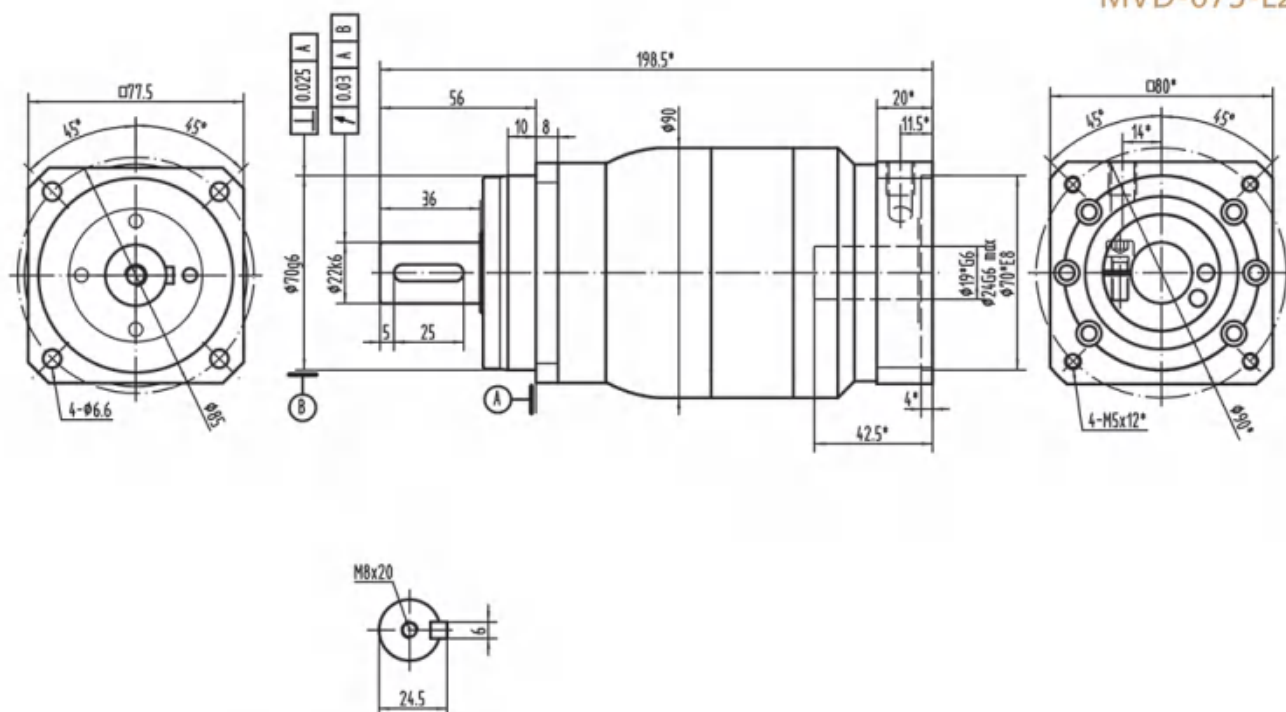

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


MVD-075-L2
(Smaller hole)

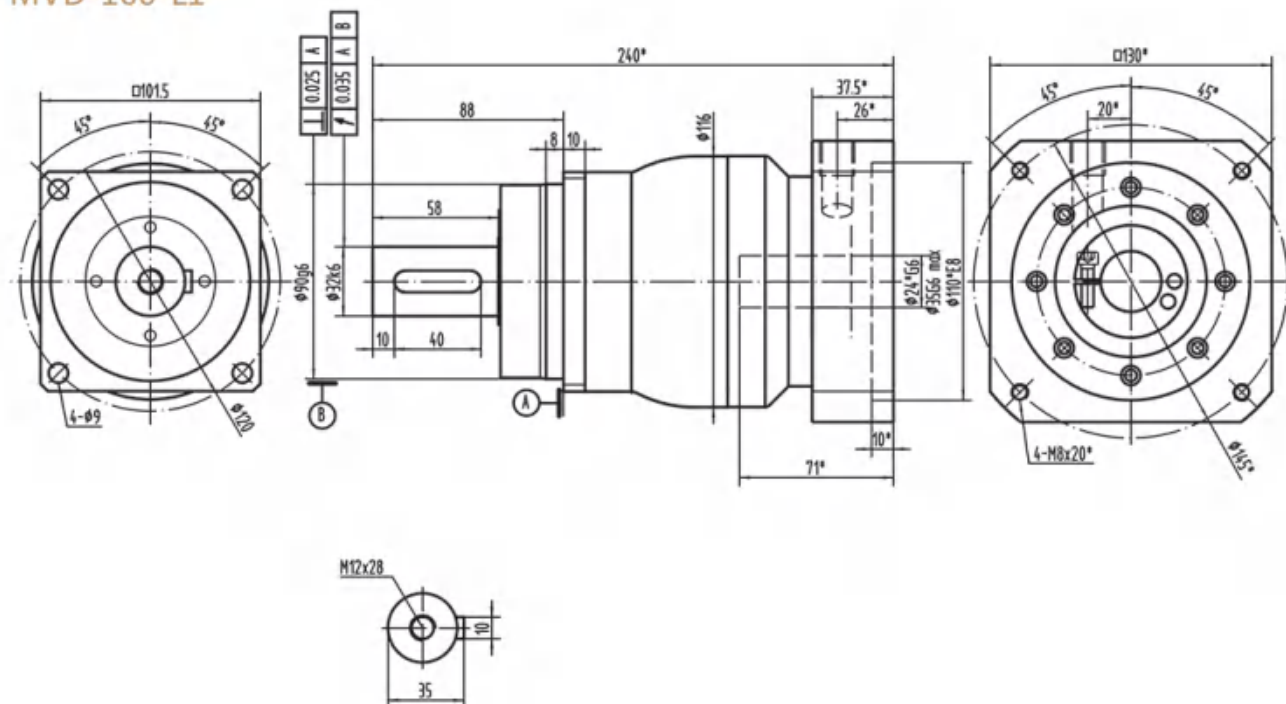


53

Drawing / Size

MVD-100-L2

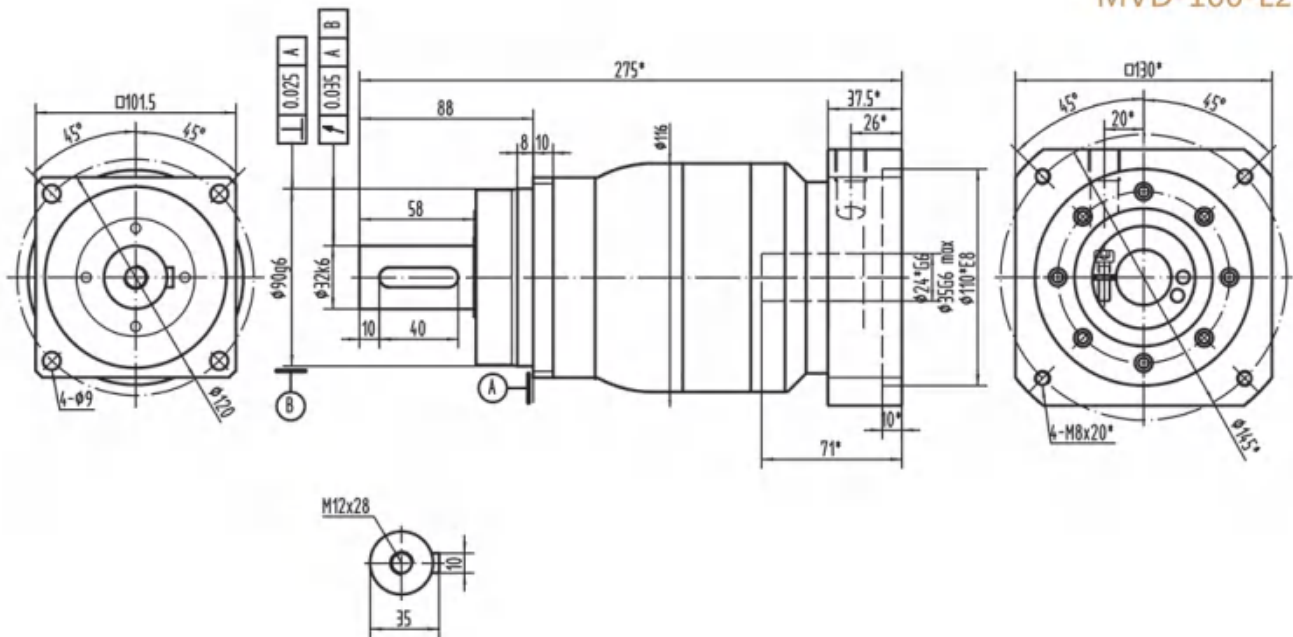


MVD-100-L2 (Smaller hole)

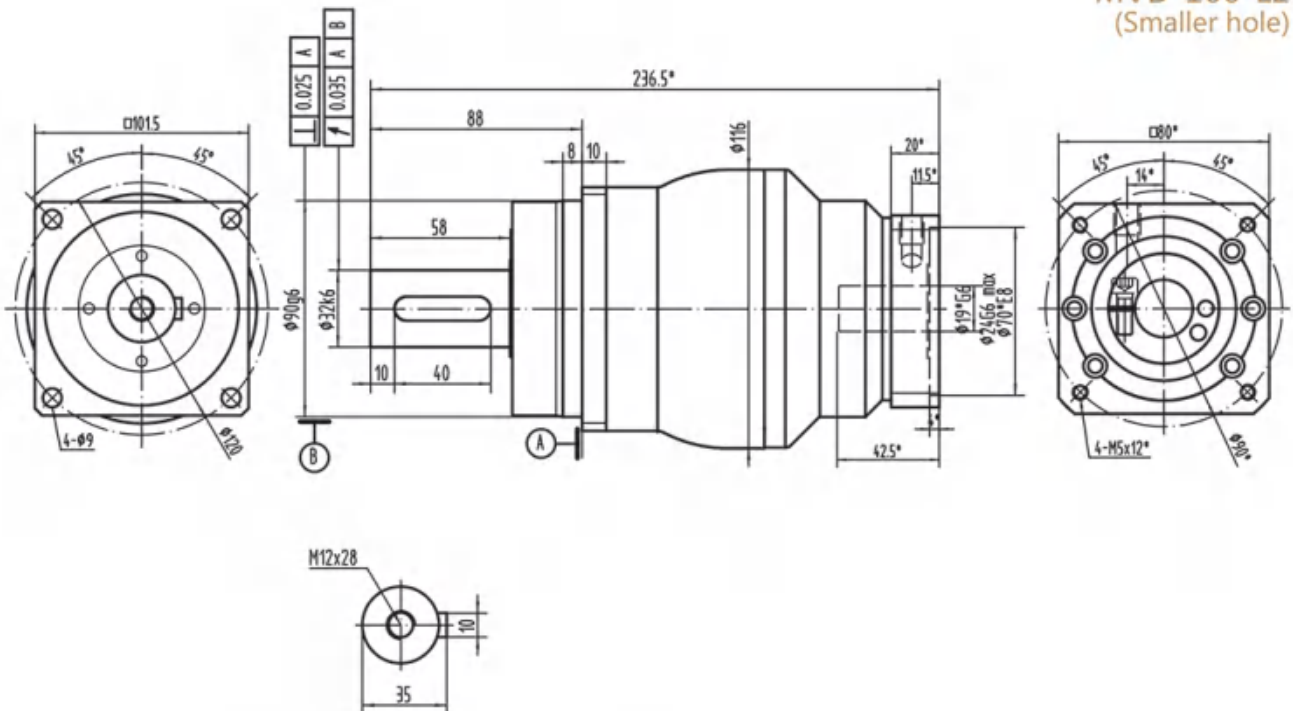


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

MVD-140-L1

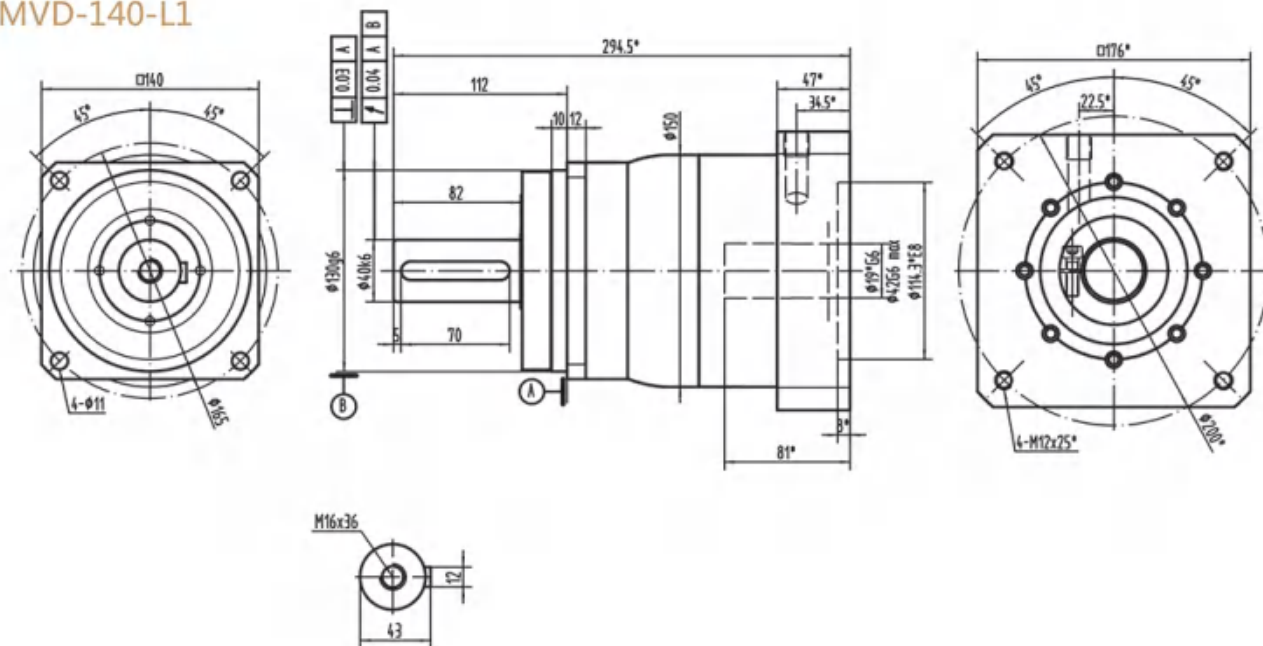


MVD-140-L2

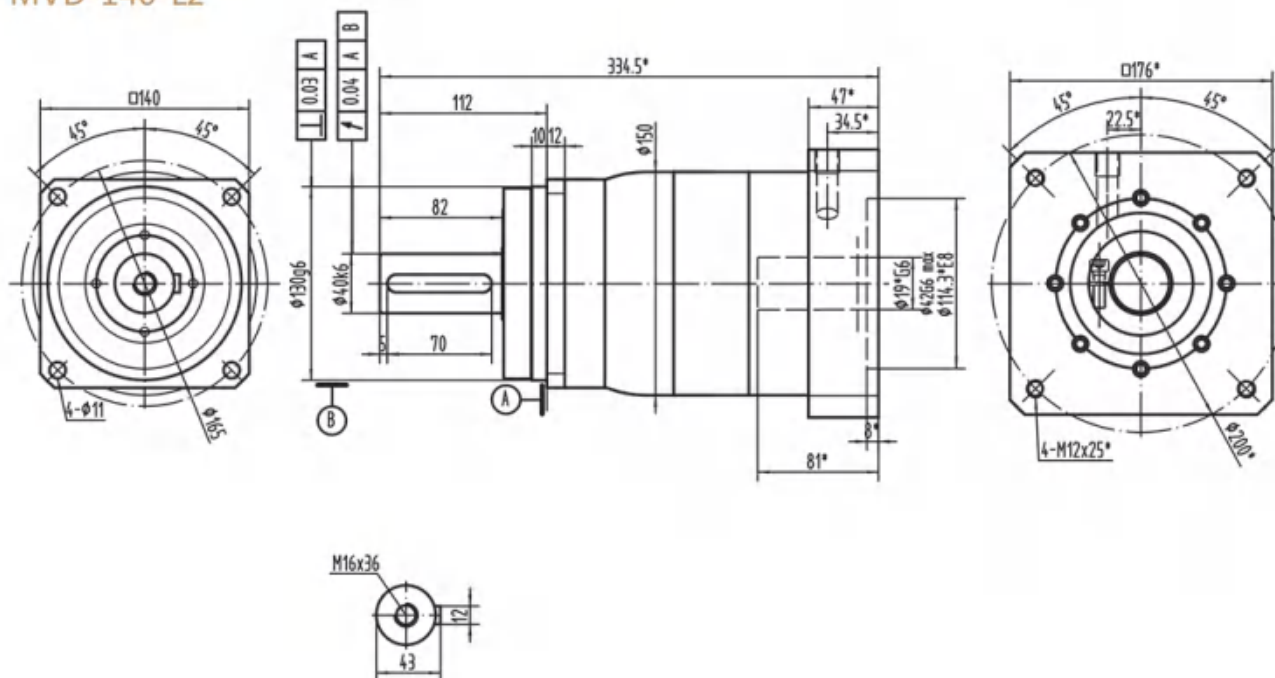


Drawing / Size

MVD-140-L2
(Smaller hole)

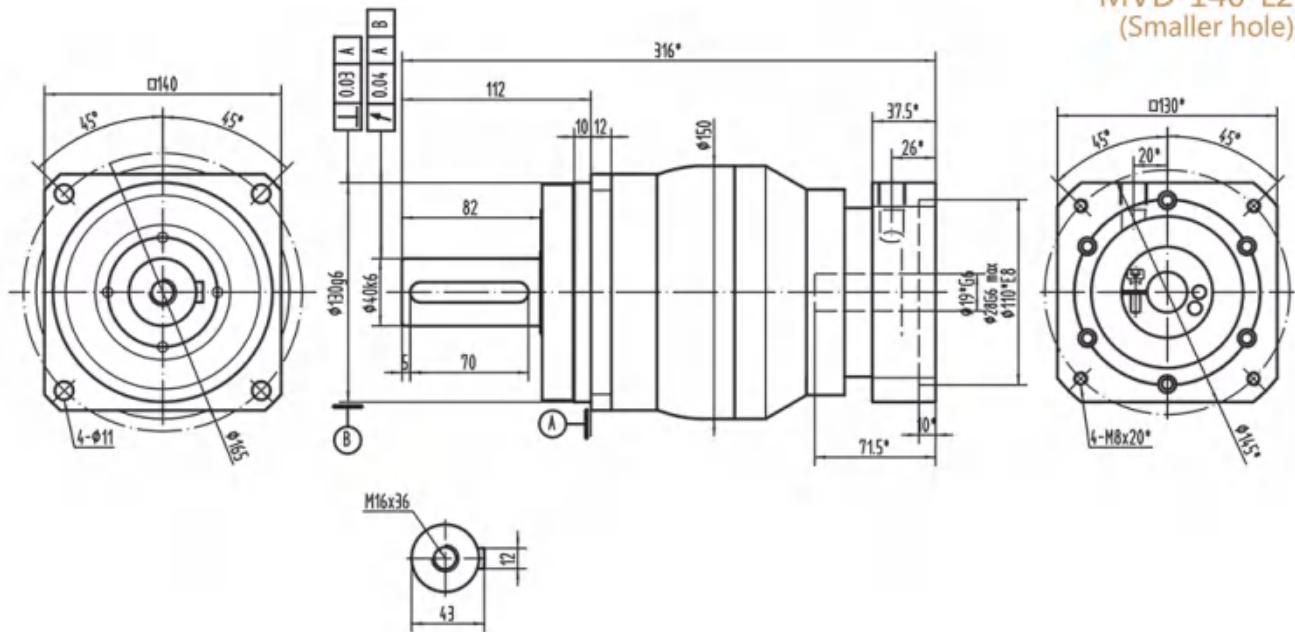


MVD-180-L1

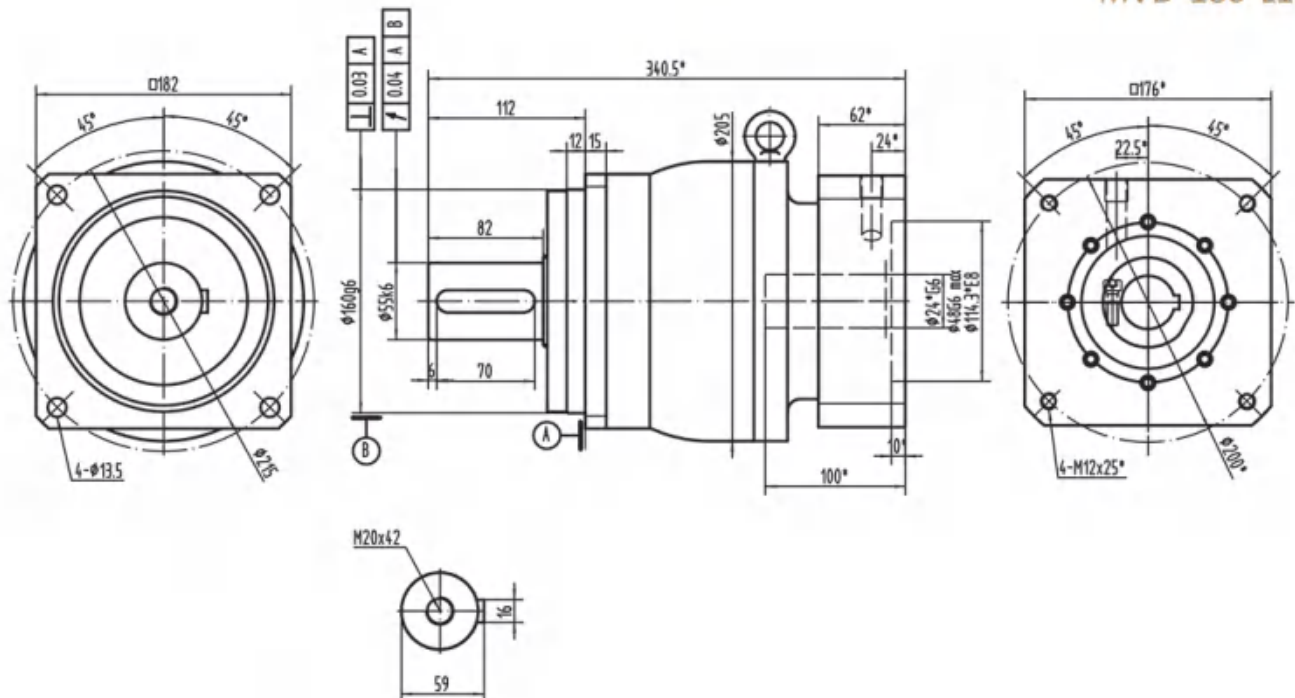


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸: 代表可根据客户需求定制产品, 如有需要, 请联系我们!

Drawing / Size

MVD-180-L2

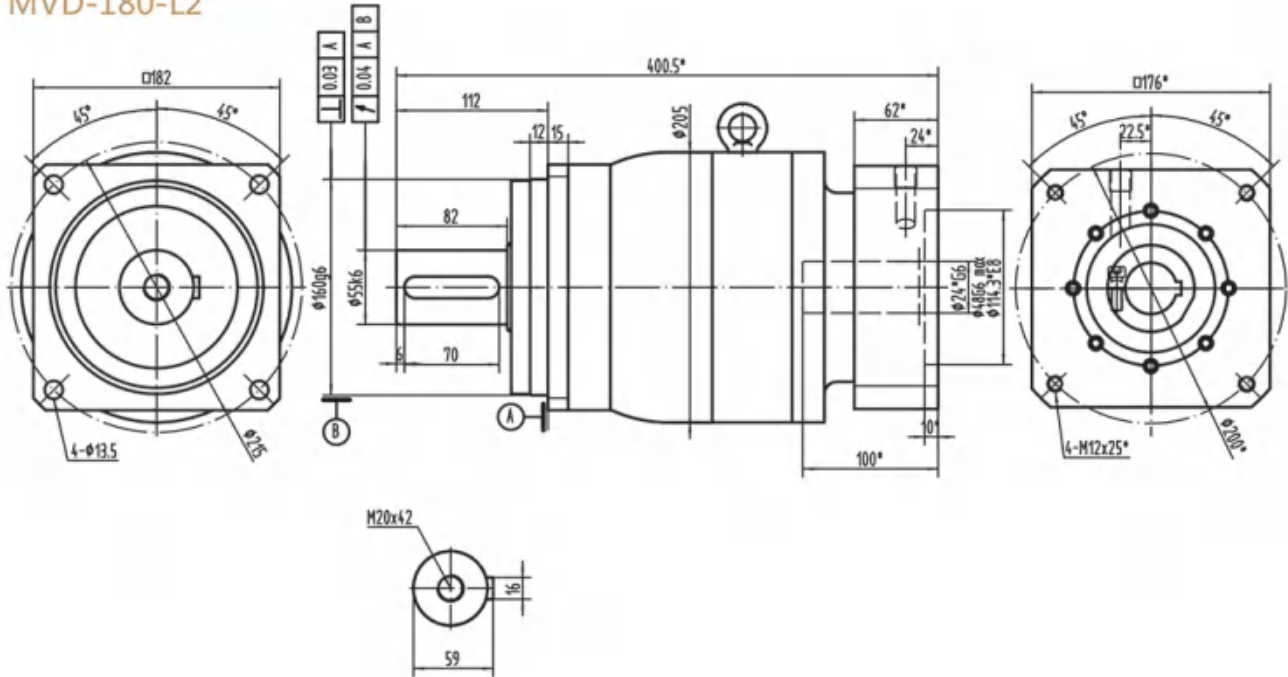


MVD-180-L2 (Smaller hole)

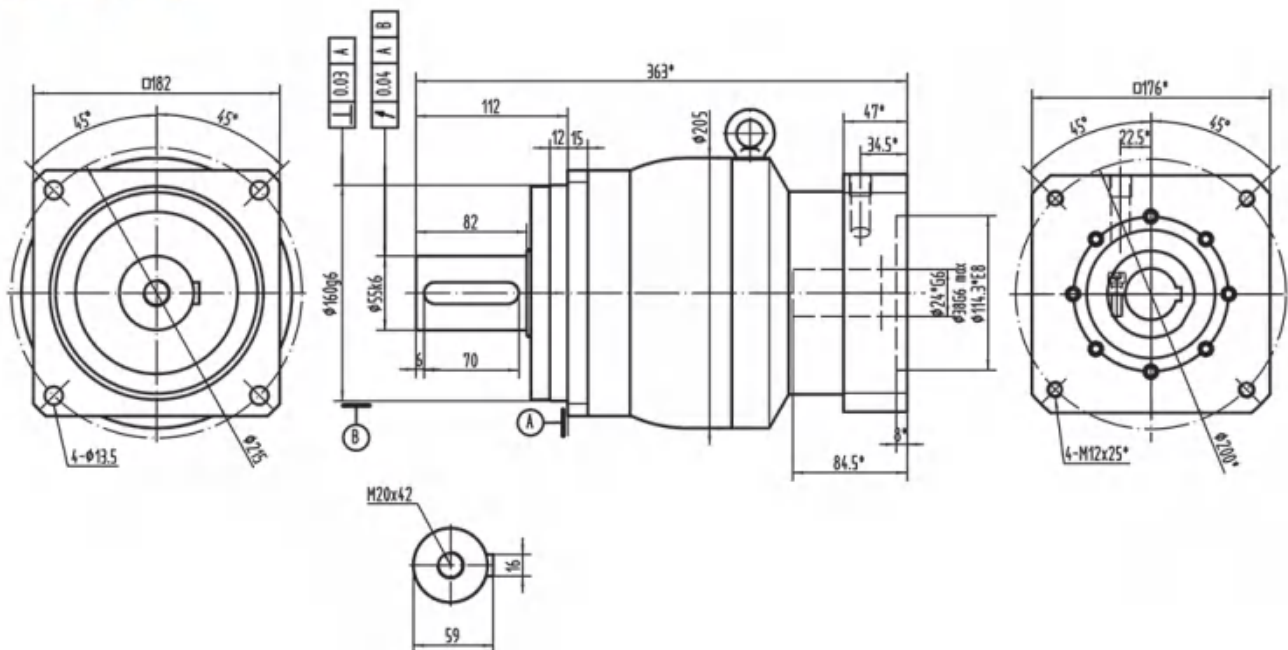


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVD-210-L1

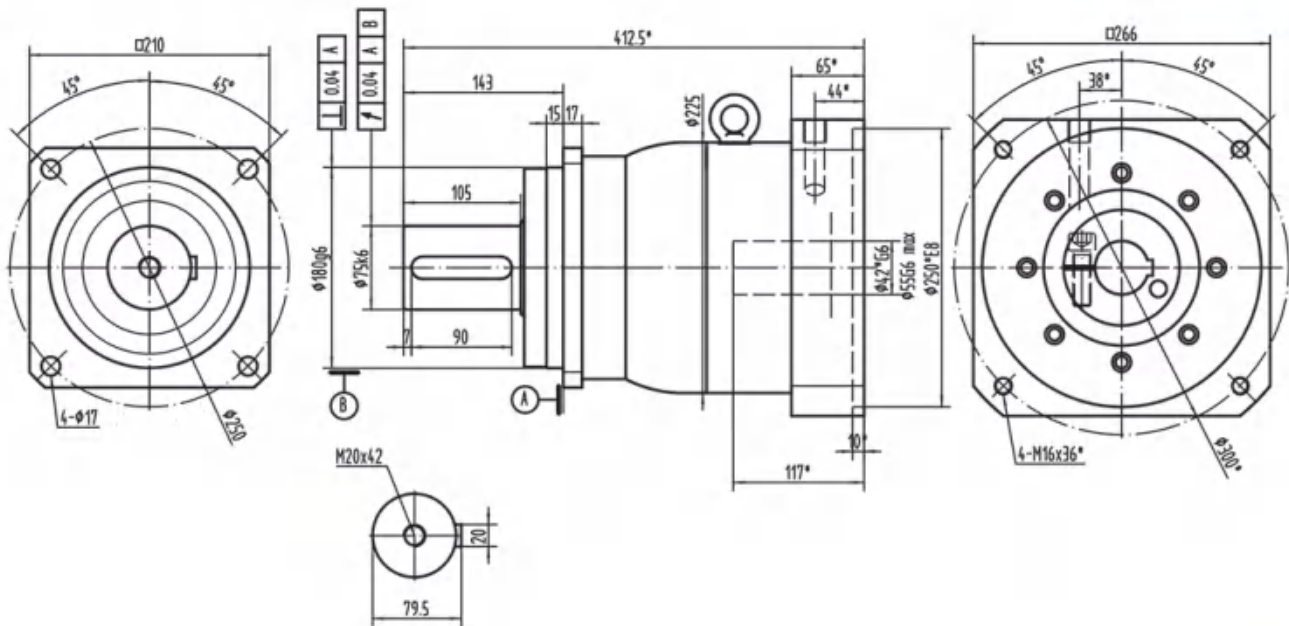


MVD-210-L2

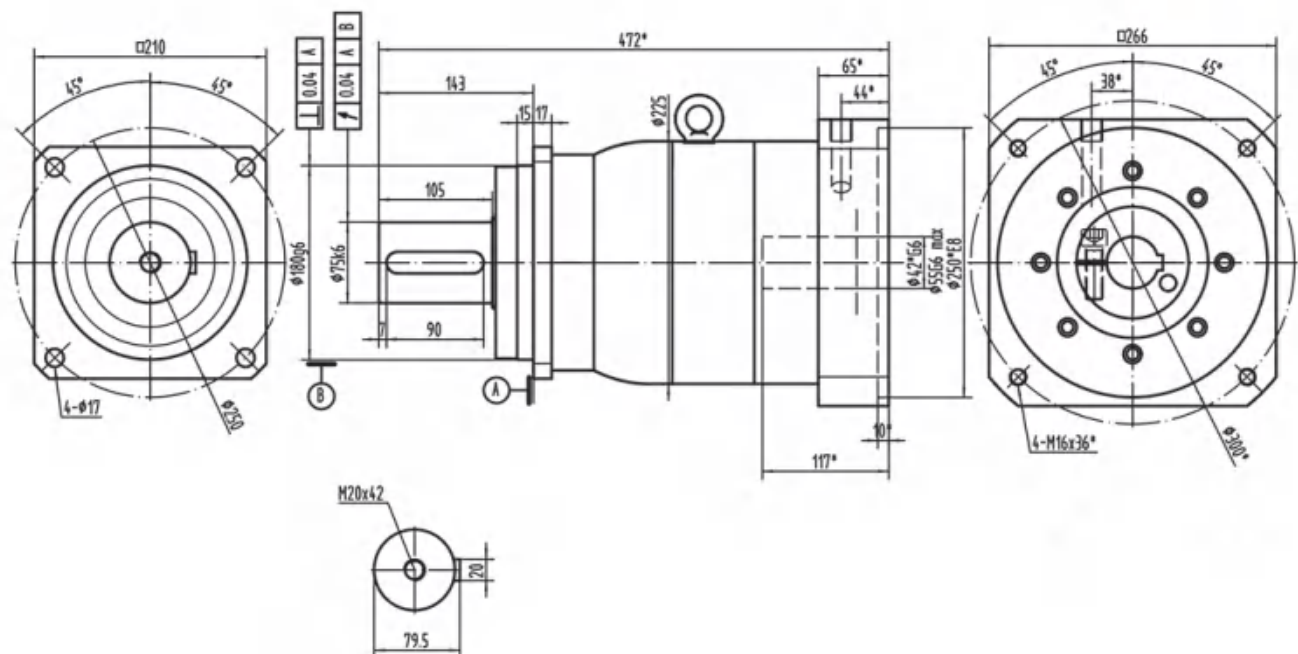


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVD-210-L2 (Smaller hole)

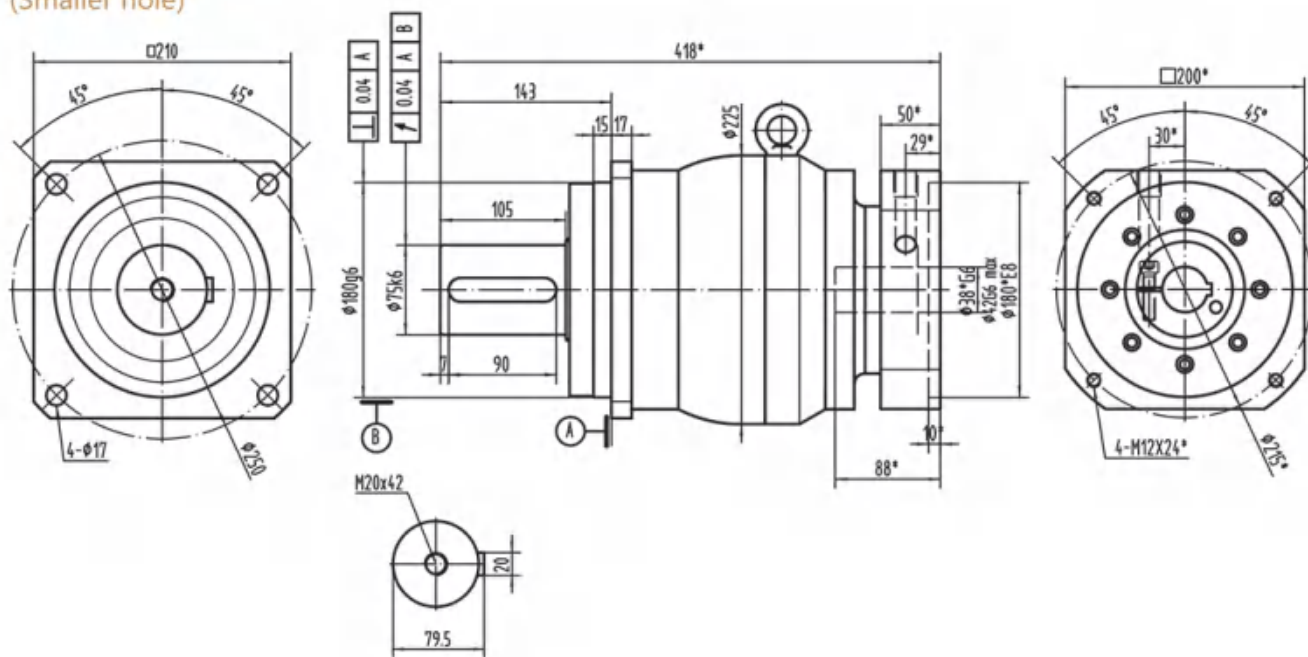


MVD-240-L1

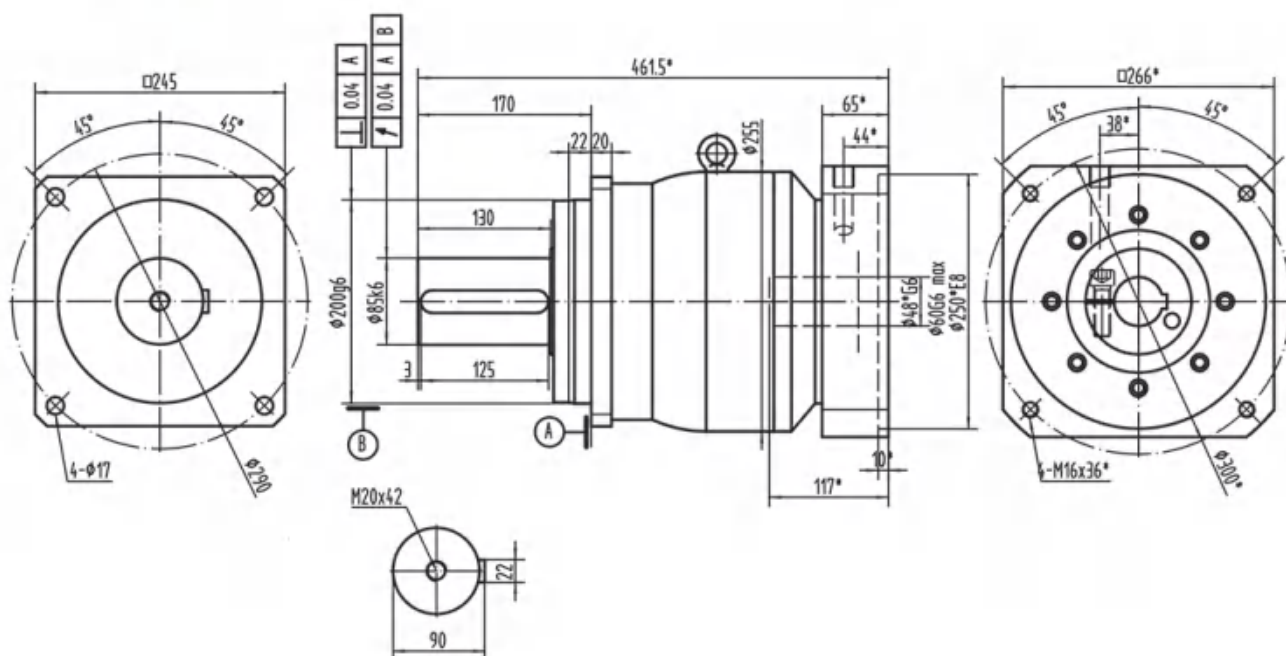

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVD-240-L2

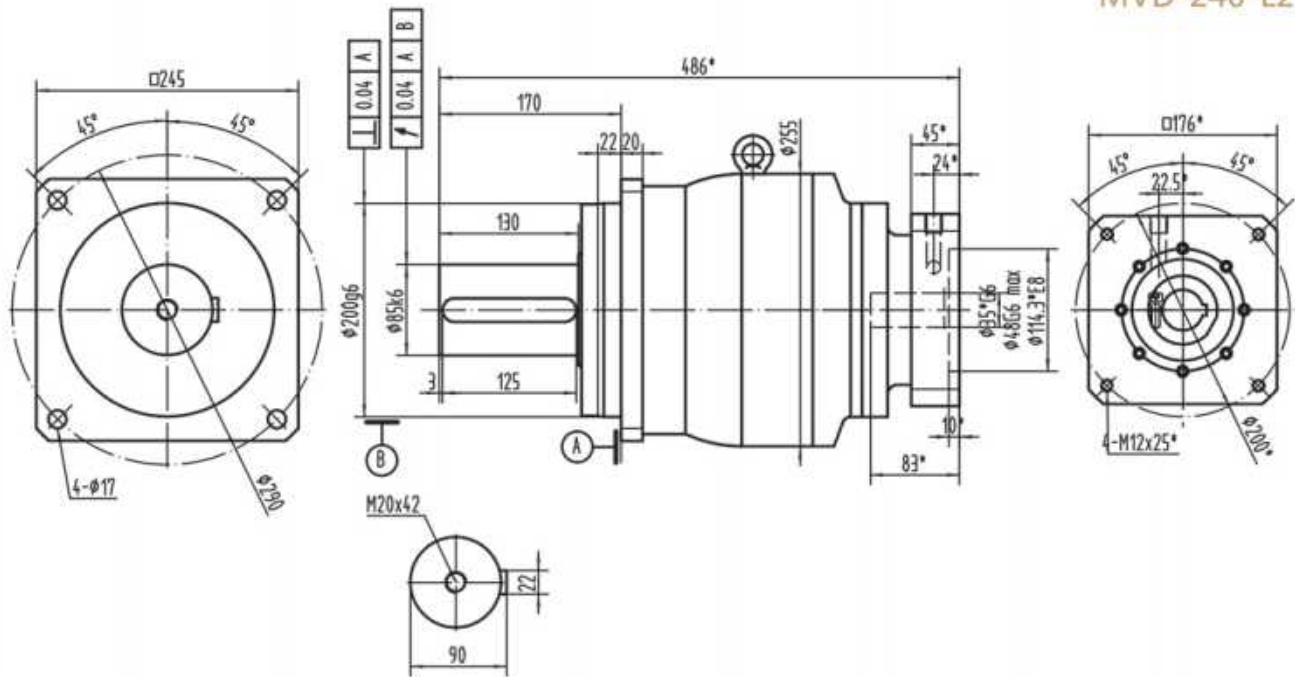

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MVD

MVD-060																				
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j _L	C ₂₁	F _{2RM}	F _{2Max}	J _L	η	L _h	T	Lub	PC	MP				
Unit		N _m	N _m	rpm	rpm	arcmin	1/degree	N	N	kgcm ²	%	h	℃				dB			
I STAGE	3	25	2×T _{2N}	3300	6000	≤3	6	3000	2700	0.40	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤60			
	4	40								0.32										
	5	40								0.28										
	6	40								0.28										
	7	40								0.25										
	8	40								0.25										
	9	25								0.25										
	10	25								0.25										
II STAGE	15	34				≤5				0.38	≥90									
	20	50								0.33										
	25	50								0.30										
	50	50								0.27										
	80	50								0.26										
	100	35								0.25										

MVD-075																										
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j _L	C ₂₁	F _{2RM}	F _{2AM}	J _L	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	1/degree	N	N	kgcm ²	%	h	℃				dB									
I STAGE	3	80	2×T _{2N}	3000	6000	≤3	10	4200	3900	1.01	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤62									
	4	120								0.78																
	5	125								0.68																
	6	125								0.68																
	7	125								0.59																
	8	125								0.59																
	9	80								0.59																
	10	80								0.57																
II STAGE	15	80				≤5				0.95	≥90															
	20	125								0.82																
	25	125								0.76																
	50	125								0.67																
	80	125								0.63																
	100	80								0.59																

Performance table

MVD-100																										
Symb.	i	T _{2N}	T _{2Max}	n _{1N}	n _{1Max}	j ₁	C ₂₁	F _{20Max}	F _{21Max}	J ₁	η	L _h	T	Lub	PC	MP	dB									
Unit		N _m	N _m	rpm	rpm	arcmin	kg/mm ²	N	N	kg/cm ²	%	h	°C													
I STAGE	3	160	2×T _{2N}	2500	6000	≤3	31	6800	6200	3.14	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤65									
	4	220								2.40																
	5	260								2.16																
	6	260								2.16																
	7	260								1.93																
	8	260								1.93																
	9	160								1.93																
	10	160								1.90																
II STAGE	15	220				≤5				2.95	≥90															
	20	300								2.57																
	25	350								2.38																
	50	350								2.14																
	80	360								2.05																
	100	220								1.97																

MVD

MVD-140																										
Symb.	i	T _{2N}	T _{2Max}	n _{1N}	n _{1Max}	j ₁	C ₂₁	F _{20Max}	F _{21Max}	J ₁	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	kg/mm ²	N	N	kg/cm ²	%	h	°C				dB									
I STAGE	3	350	2×T _{2N}	2000	5000	≤3	53	11000	9800	16.77	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤66									
	4	550								12.61																
	5	600								10.31																
	6	600								10.31																
	7	600								8.73																
	8	550								8.73																
	9	380								8.64																
	10	380								8.35																
II STAGE	15	460				≤5				15.19	≥90															
	20	650								13.05																
	25	700								11.89																
	50	700								10.28																
	80	700								9.39																
	100	460								8.76																

Performance table

MVD

MVD-180																										
Symb.	i	T _{2N}	T _{2Hot}	n _{1N}	n _{1Max}	j _t	C _{2t}	F _{20Max}	F _{3AMax}	J _t	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	1/100mm	N	N	kg/cm ²	%	h	℃				dB									
I STAGE	3	1100	2xT _{2N}	1500	3500	≤3	175	18500	16000	542	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤71									
	4	1600								39.44																
	5	1800								33.38																
	6	1800								33.02																
	7	1800								27.49																
	8	1800								27.00																
	9	1200								27.37																
	10	1200								47.00																
II STAGE	15	1300				≤5				34.5	≥90															
	20	1800								315																
	25	1900								30.8																
	50	1900								28.3																
	80	1900								26.37																
	100	1300								30.36																

MVD-210																											
Symb.	i	T _{2N}	T _{2test}	n _{1N}	n _{1Max}	j _t	C _{2t}	F _{20Max}	F _{23Max}	J _t	η	L _h	T	Lub	PC	MP											
Unit		N _m	N _m	rpm	rpm	arcmin	1/100mm	N	N	kg/cm ²	%	h	°C				dB										
I STAGE	3	1500	2xT _{2N}	1200	3000	≤3	400	23000	21000	139	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤75										
	4	2100								83.5																	
	5	2200								68.1																	
	6	2200								68.1																	
	7	2200								54.4																	
	8	2200								52.2																	
	9	1600								49.3																	
	10	1500								47.0																	
	II STAGE	15				2400				≤5								34.5	≥90								
		20				2400												31.5									
25		2550	30.8																								
50		2550	28.3																								
80		2550	28.1																								
100		1900	28.0																								

Performance table

MVD-240																	
Symb.	i	T _{2N}	T _{2Max}	n _N	n _{Max}	j _t	C _{2t}	F _{2RMMax}	F _{2AMMax}	j _t	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	mm/mm	N	N	kg/cm ²	%	h	°C				dB
I STAGE	3	3000	2xT _{2N}	1000	2500	≤3	540	29000	26500	180	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77
	4	3000								180							
	5	3150								170							
	6	3150								170							
	7	3150								170							
	8	3000								170							
	9	2400								150							
	10	2200								150							
II STAGE	15	3000	2xT _{2N}	1000	2500	≤5	540	29000	26500	64	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77
	20	3000								64							
	25	3150								64							
	50	3150								64							
	80	3150								64							
	100	2300								64							

MVD

MAF SERIES



高性能系列适应于最恶劣工况。MAF精密行星提供高刚性、最大扭矩、最高精度和小体积。

High-performance series for heaviest operating duties, MAF gearboxes present high torsional stiffness, maximum power, optimum precision and compactness.



造型数据:


Selection data:

扭矩 (Nm)	14-3150
速比	4-100
背隙 (arcmin)	3-5
最大工作温度 (°C)	90
噪音 (dB)	58-79


Nominal output torque (Nm)	14-3150
Reduction ratio	4-100
Backlash (arcmin)	3-5
Max.working temperature (°C)	90
Noise (dB)	58-79

Drawing / Size

MAF-047-L1

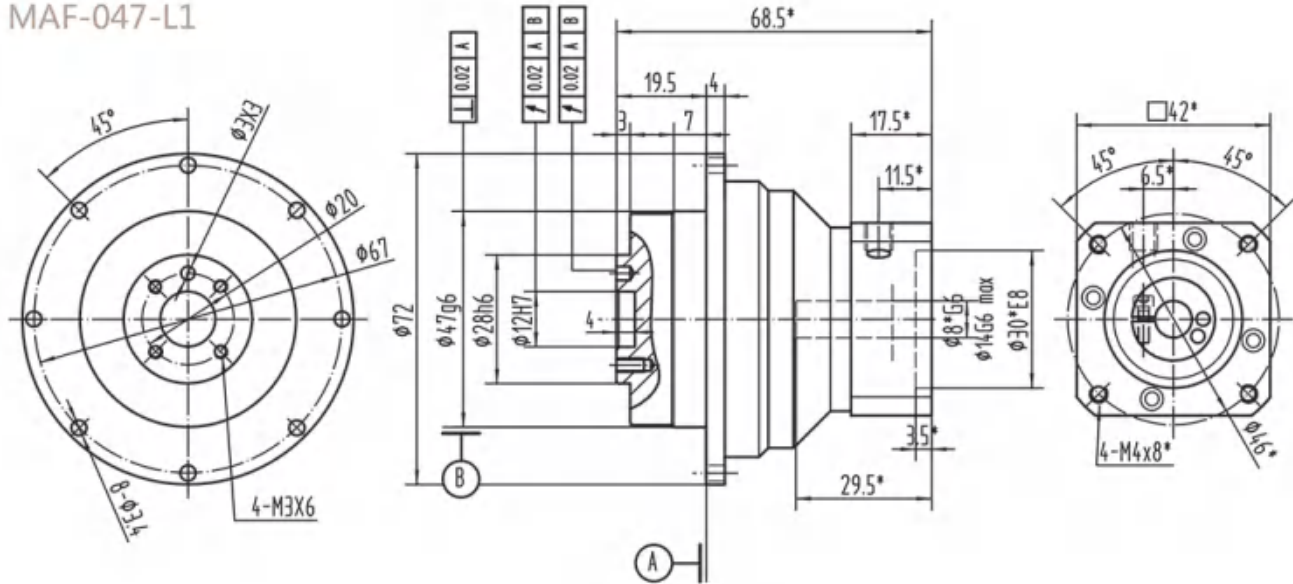


MAF-047-L2

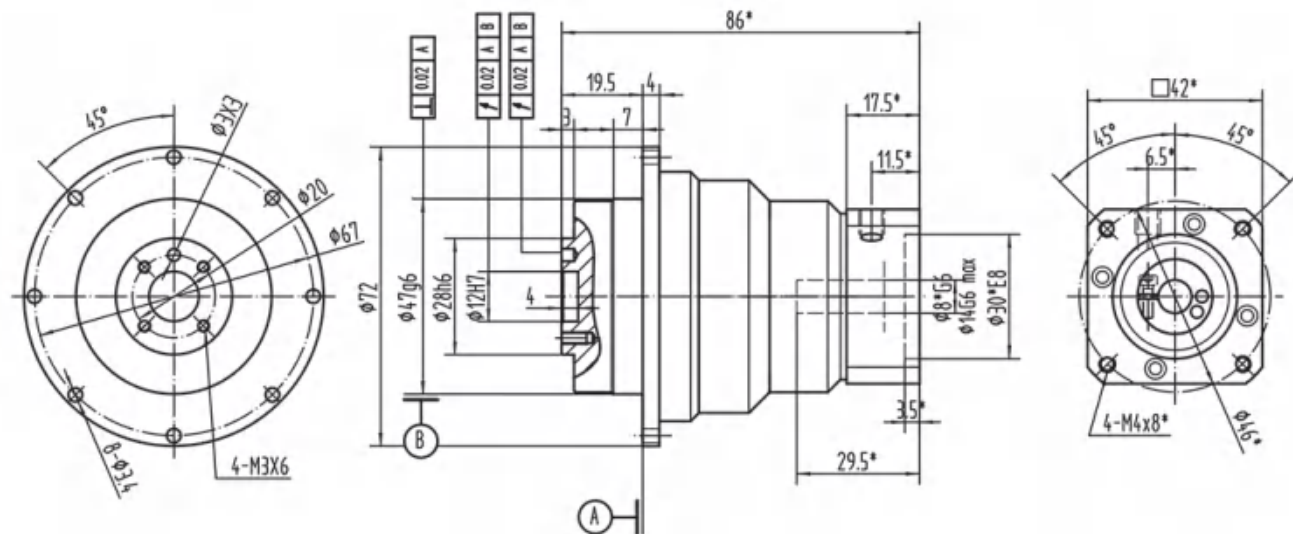


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAF-064-L1


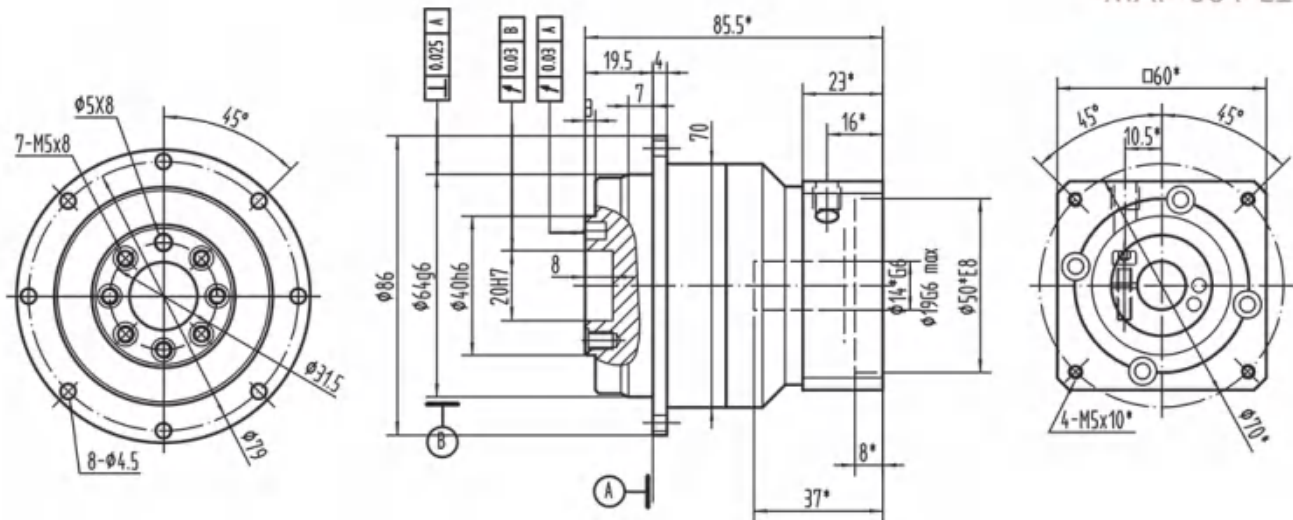


MAF-064-L2

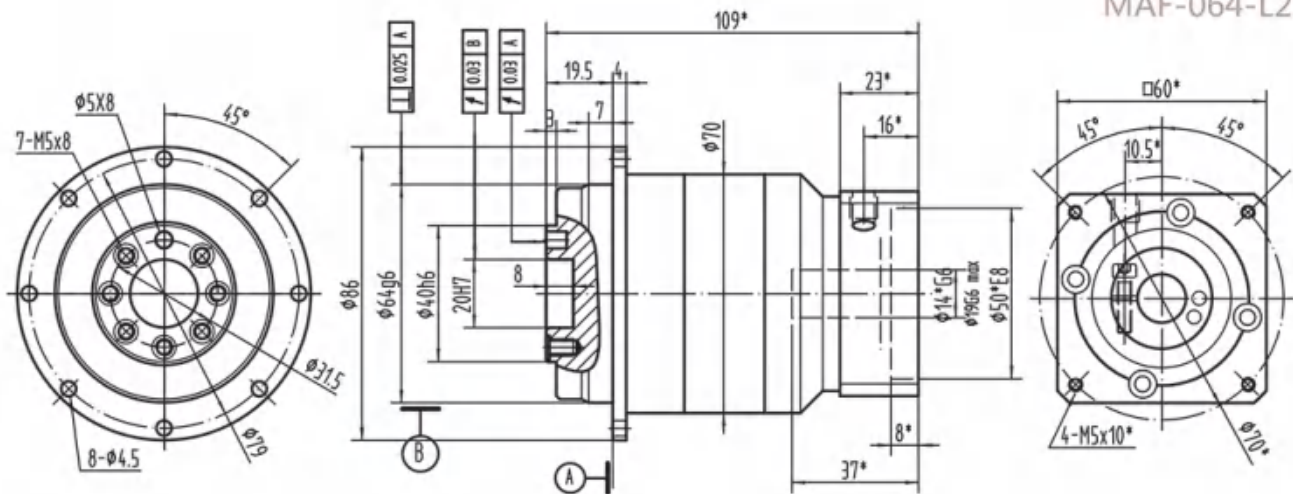


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

MAF-090-L1

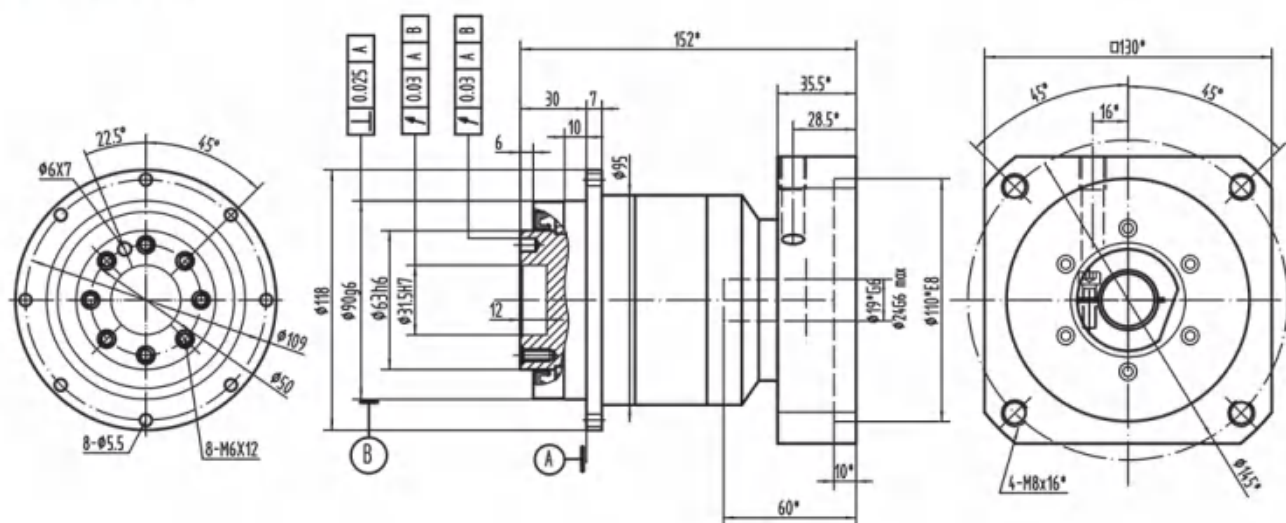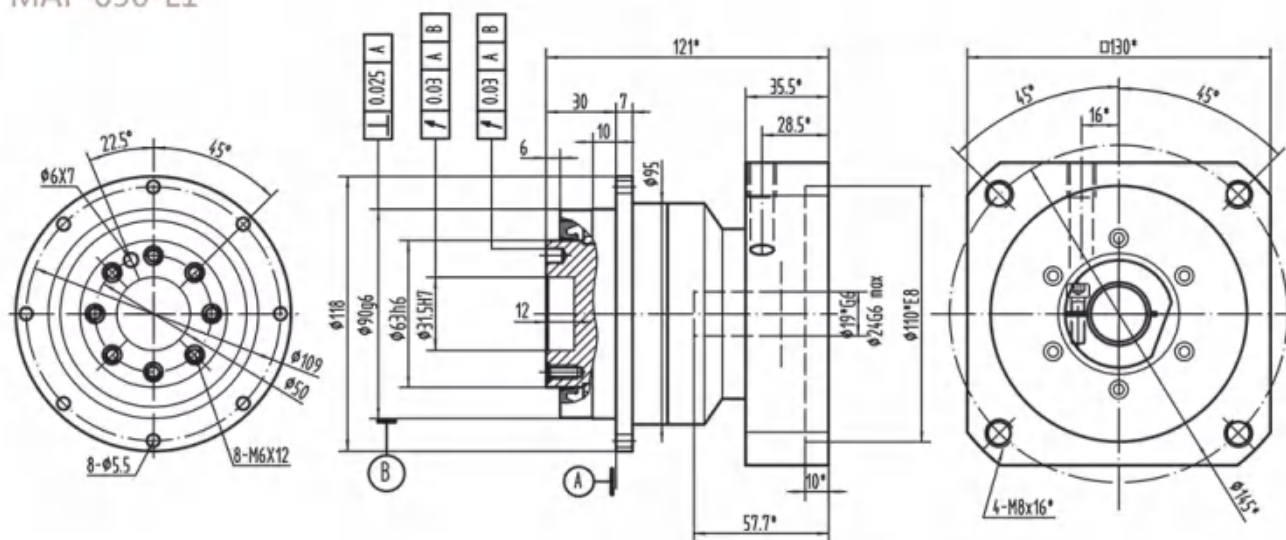


Drawing / Size

MAF-090-L2
(Smaller hole)

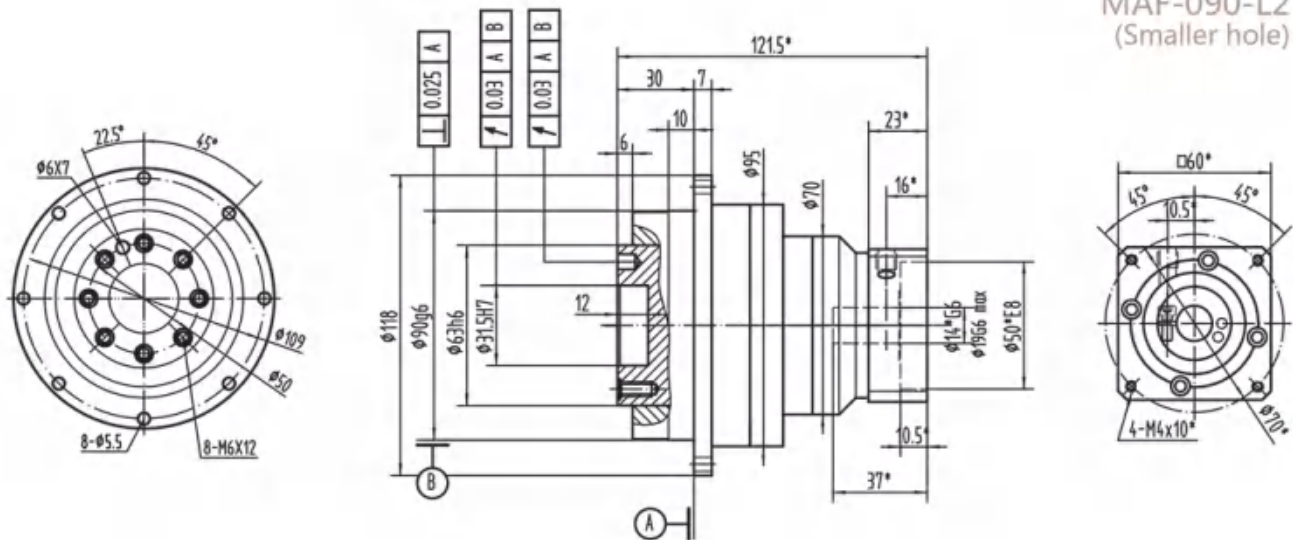


MAF-110-L1

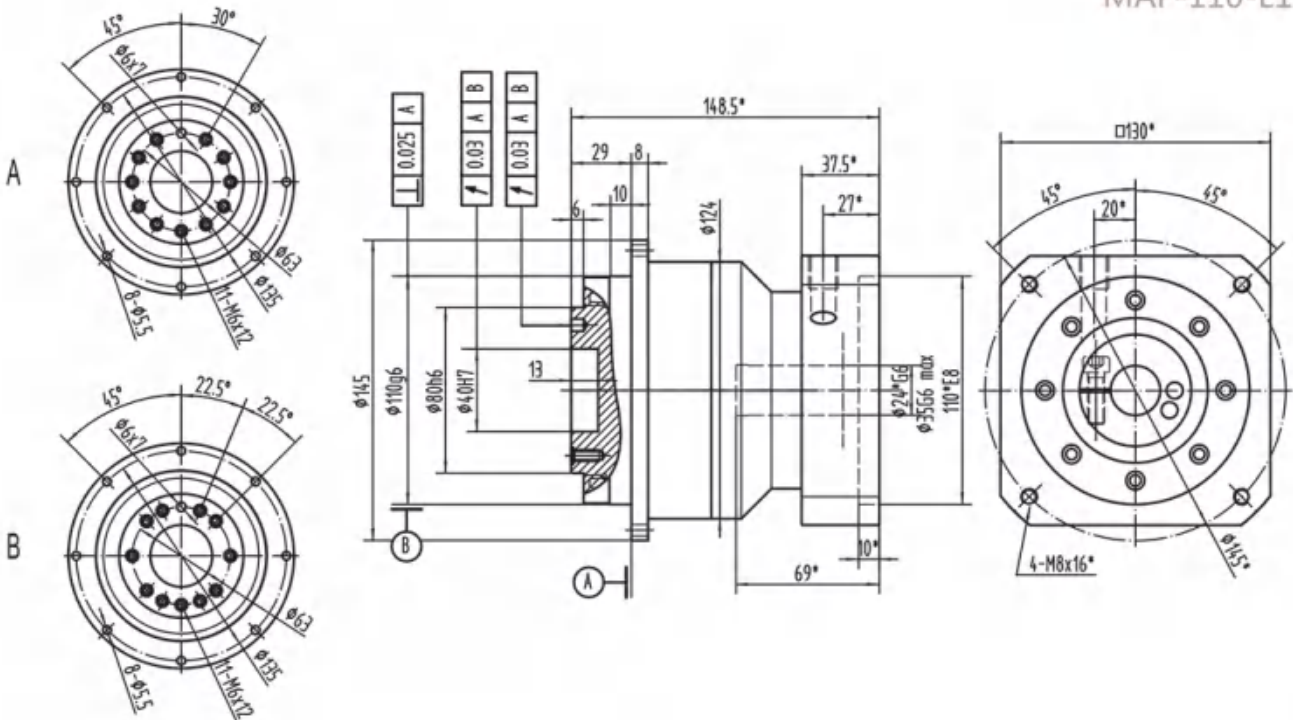


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAF-110-L2

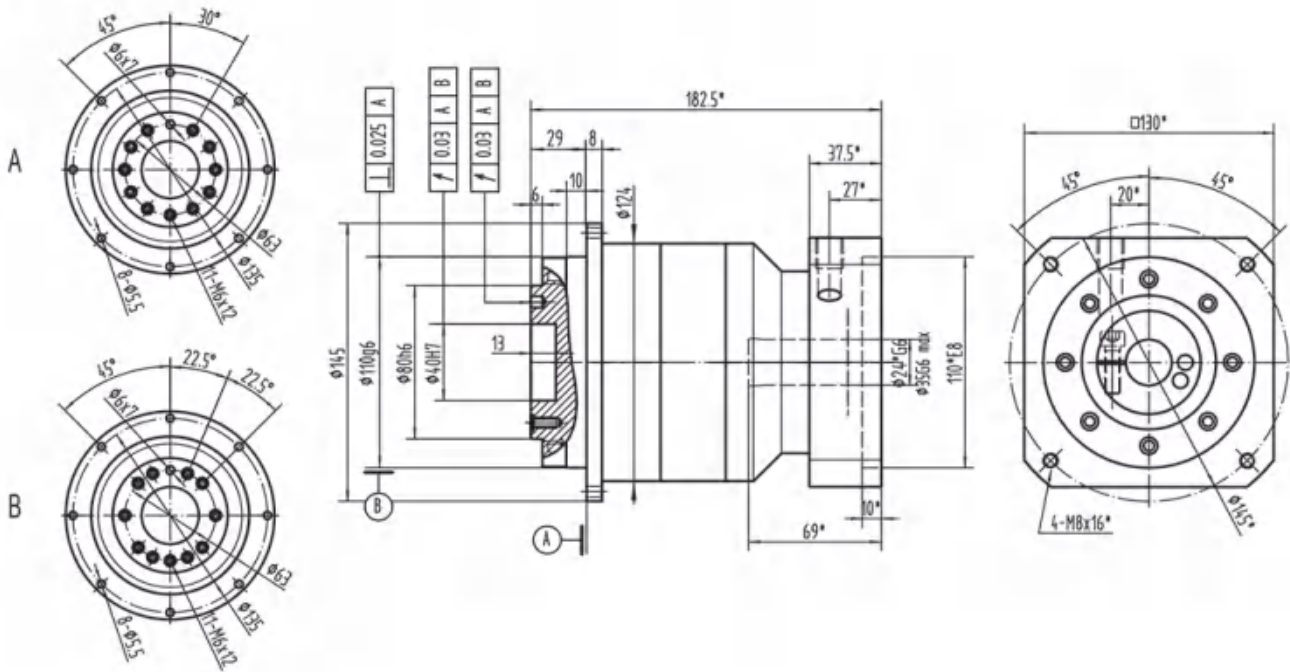


MAF-110-L2 (Smaller hole)

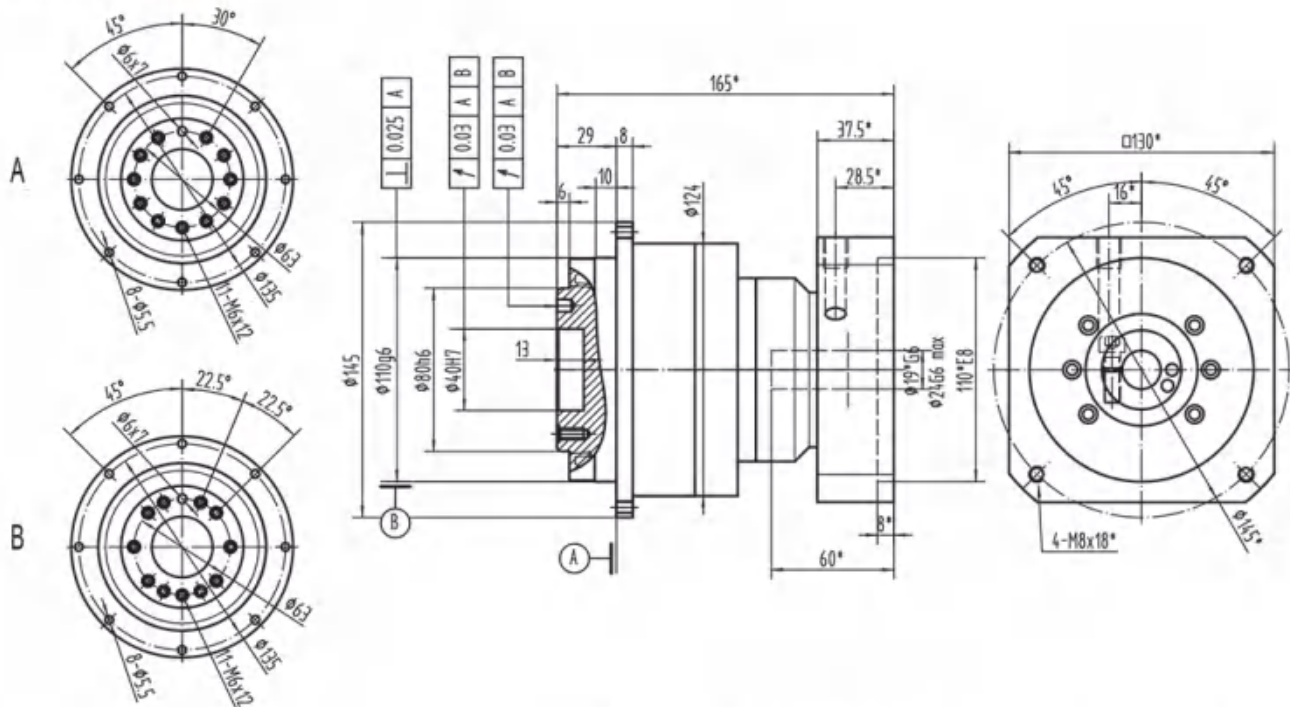


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAF-140-L1

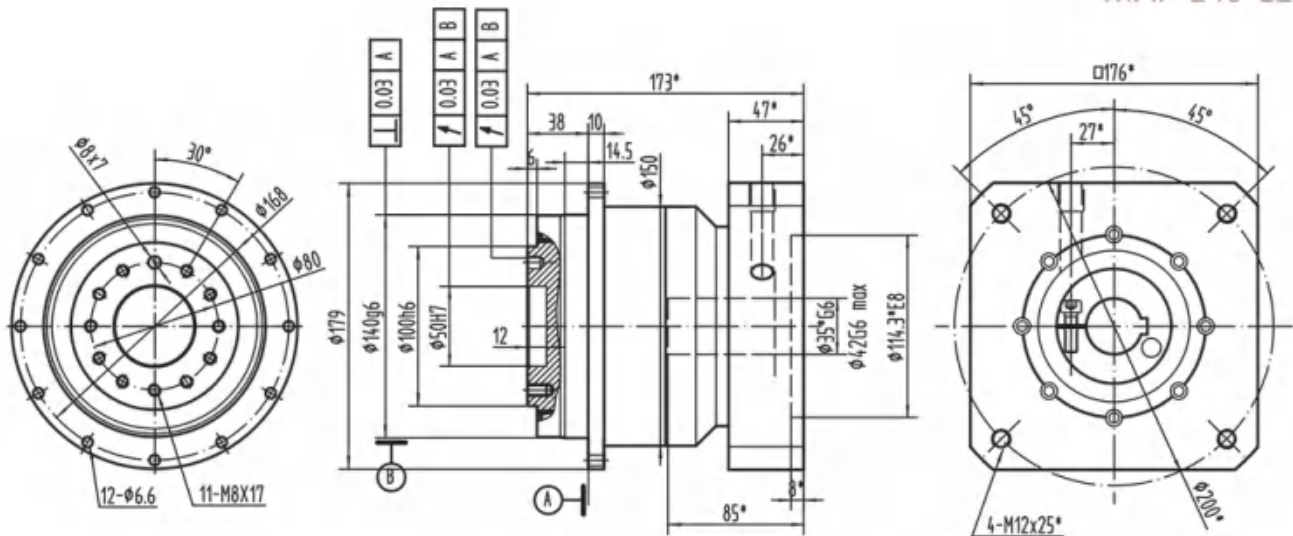


MAF-140-L2

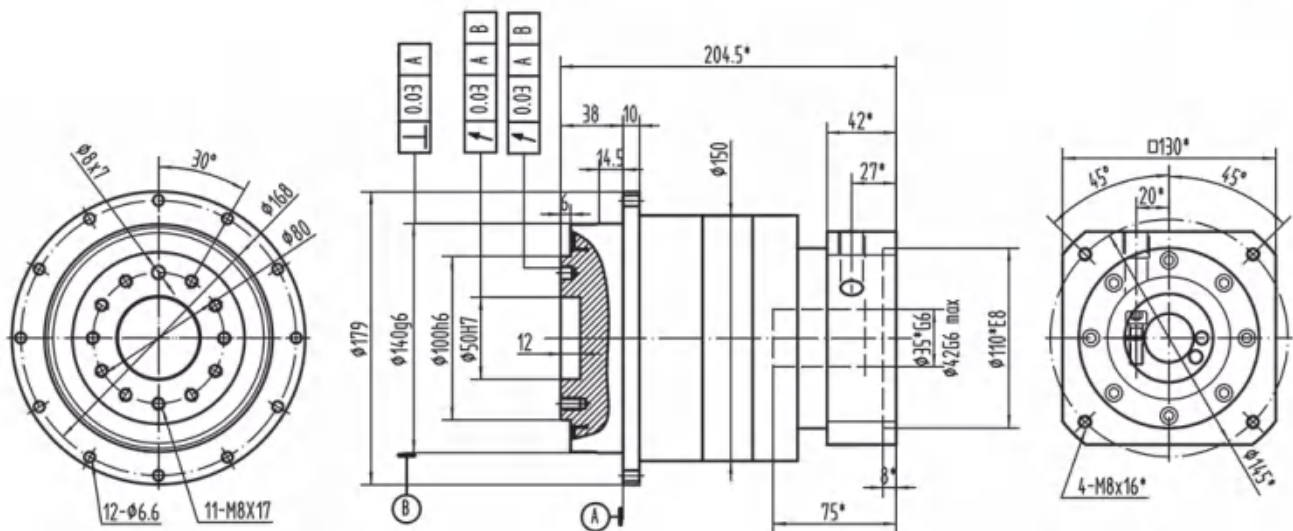


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAF-140-L2
(Smaller hole)

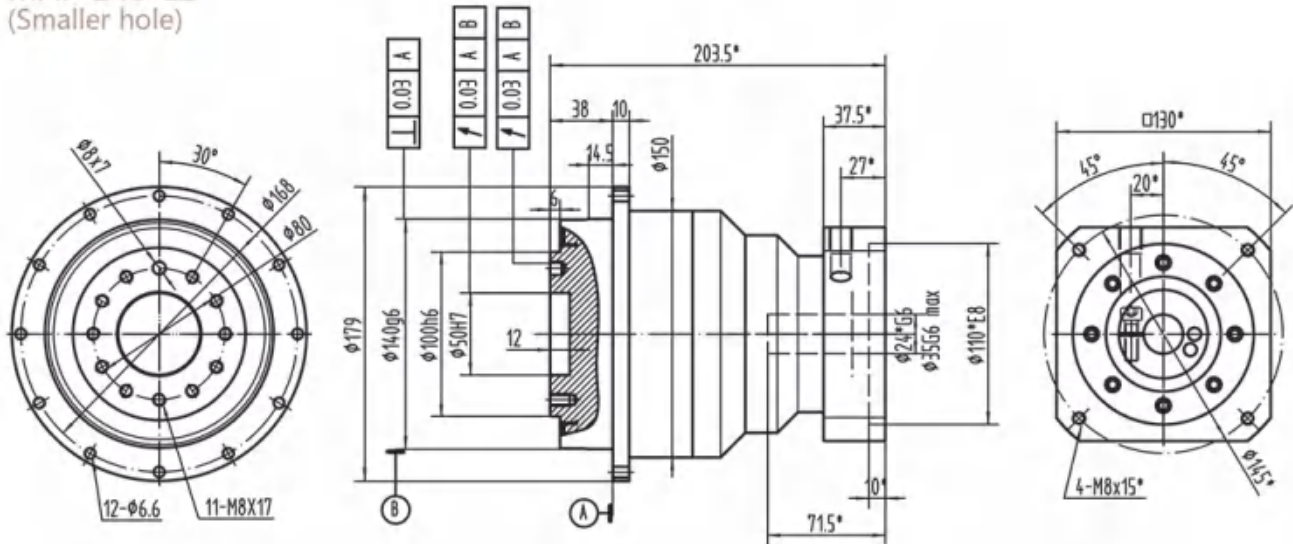


MAF-200-L1

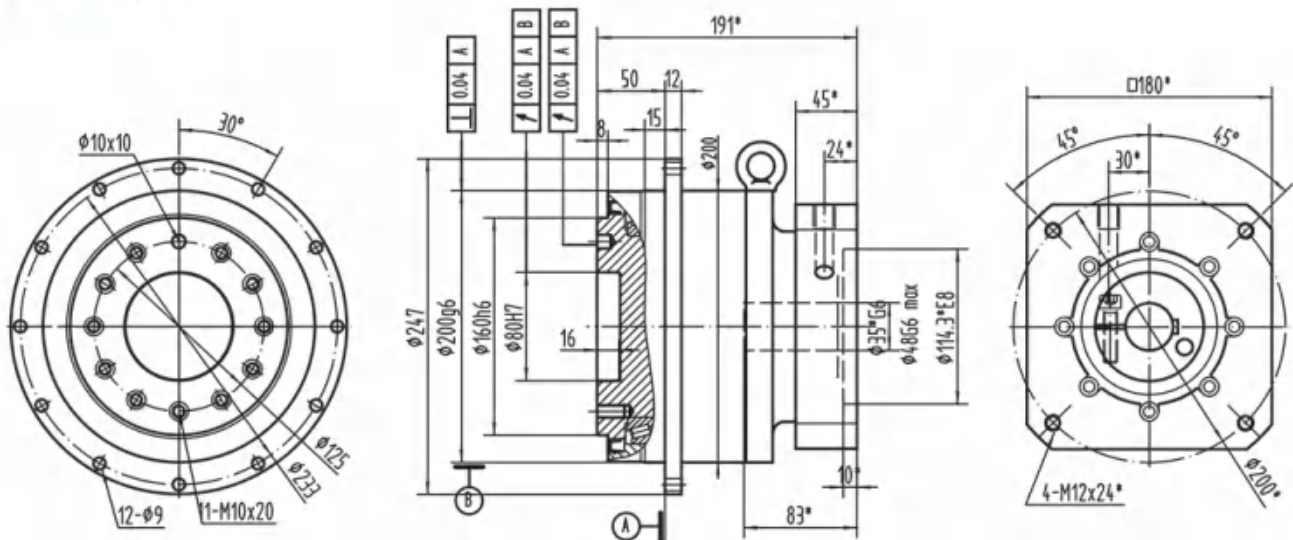

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MAF-200-L2

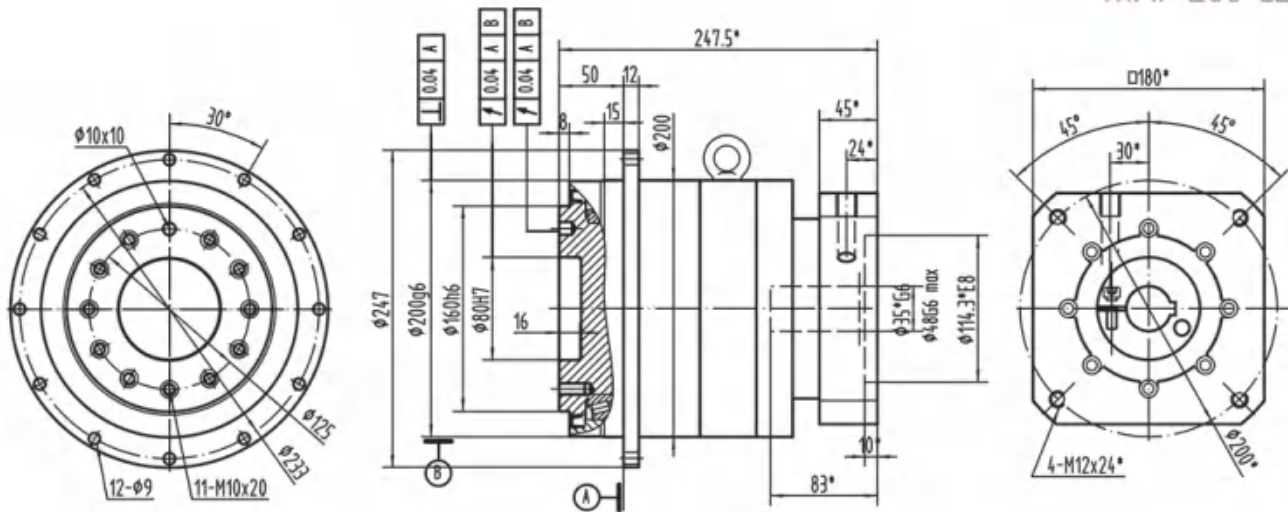

MAF


MAF-200-L2
(Smaller hole)

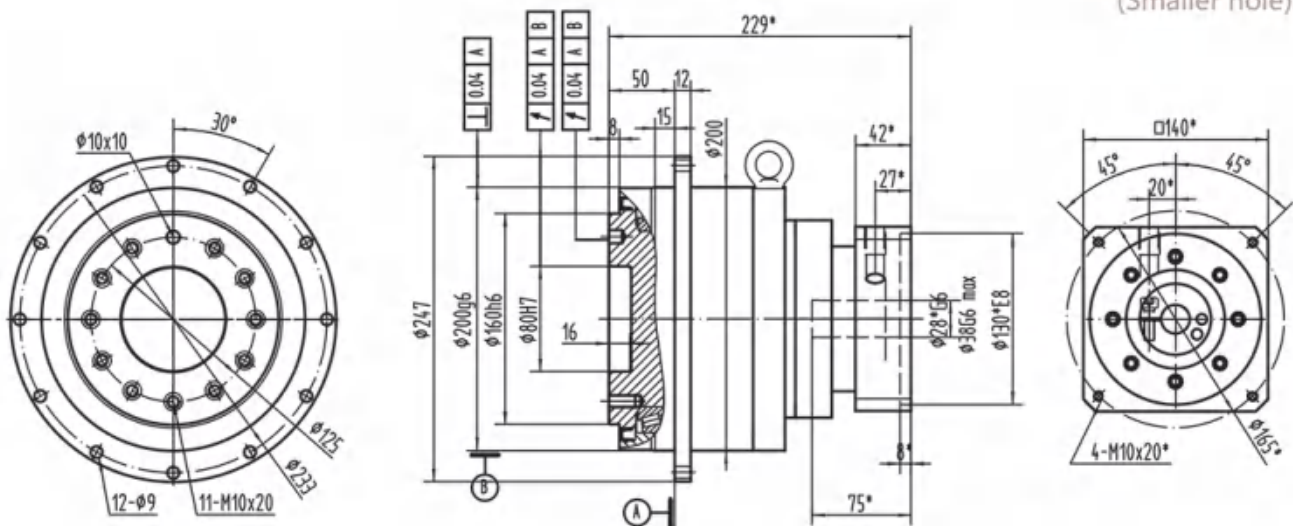


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAF-255-L1

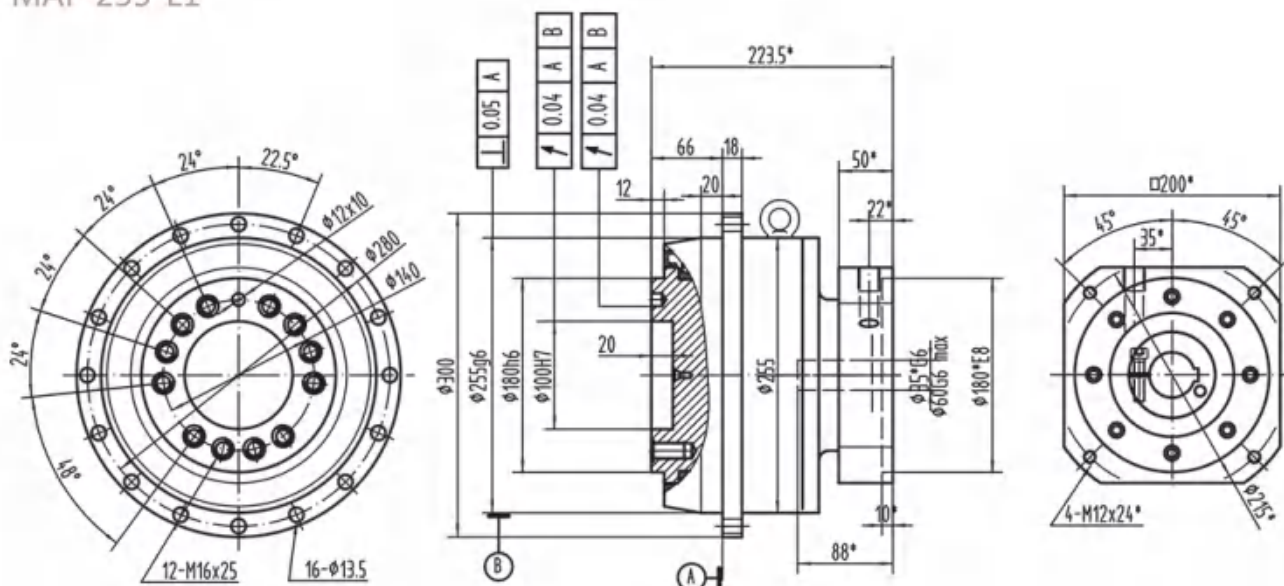


MAF-255-L2

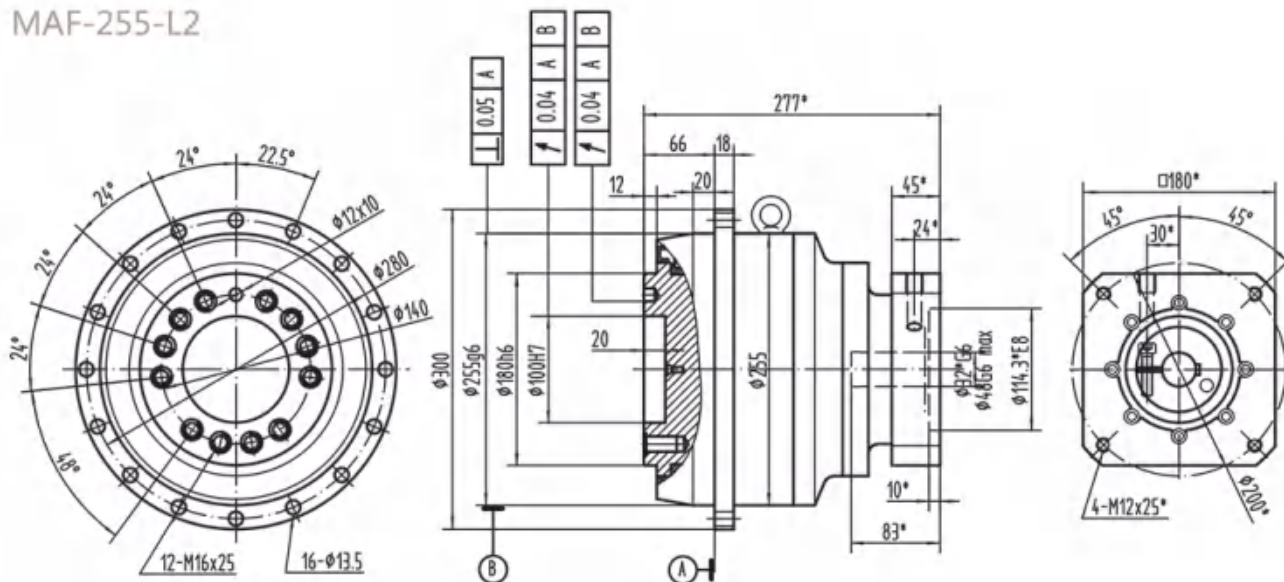


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAF-285-L1

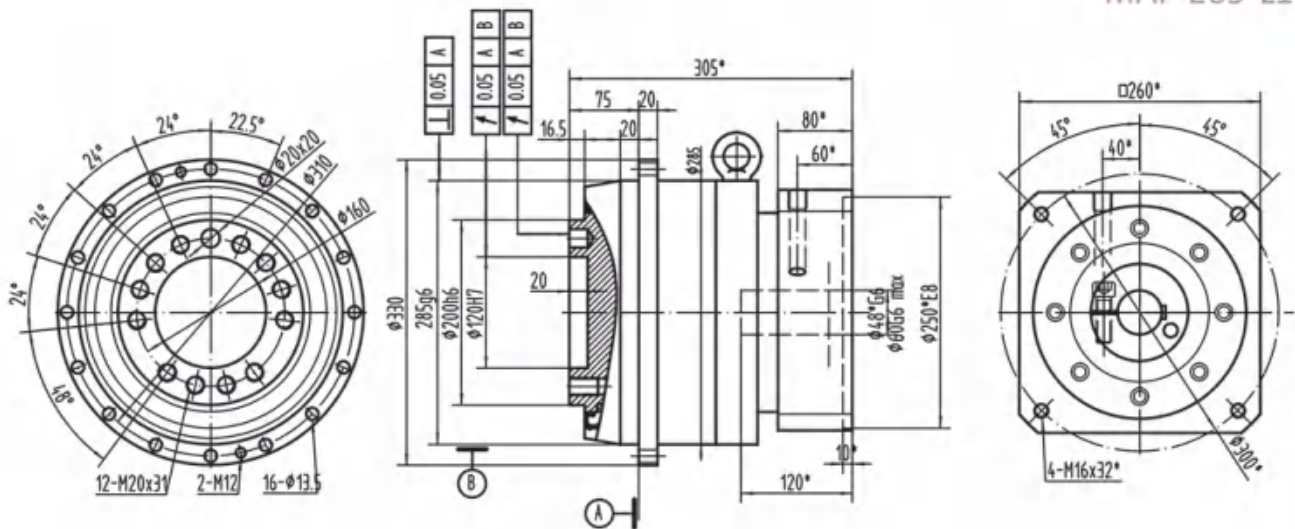

MAF-285-L2

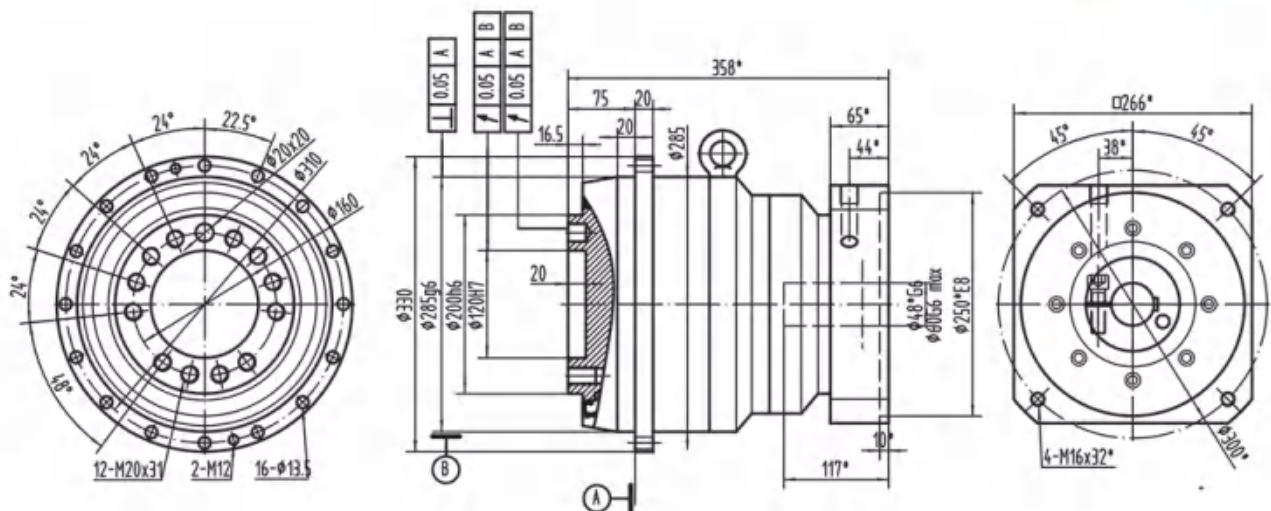

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸; 代表可根据客户需求定制产品, 如有需要, 请联系我们!

Performance table

MAF

MAF-047																										
Symb.	i	T _{2N}	T _{2Max}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{20Max}	F _{2Max}	J _i	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	mm/mm	N	N	kg/cm ²	%	h	°C				dB									
I STAGE	4	14	2×T _{2N}	4000	8000	≤3	5	800	500	3	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向										
	5	20								3																
	6	20								3																
	7	20								2.2																
	8	20								3																
	9	14								3																
	10	14								2.2																
II STAGE	20	14				≤5				3	≥90															
	25	20								3																
	50	20								3																
	80	20	3																							
	100	14	2.2																							

MAF-064																										
Symb.	i	T _{2N}	T _{2Max}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{20Max}	F _{2Max}	J ₁	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	mm/mm	N	N	kg/cm ²	%	h	°C				dB									
I STAGE	4	40	2×T _{2N}	3300	6000	≤3	13	1300	680	0.13	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤60									
	5	40								0.13																
	6	40								0.13																
	7	40								0.13																
	8	40								0.03																
	9	25								0.03																
	10	25								0.03																
II STAGE	20	50				≤5				0.03	≥90															
	25	50								0.03																
	50	50								0.03																
	80	50								0.03																
	100	35								0.03																

Performance table

MAF-090																										
Symb.	i	T _{2H}	T _{2Max}	n _{2H}	n _{1Max}	j _t	C _{2t}	F _{2HMax}	F _{1Max}	j ₁	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	kg/cm ²	N	N	kg/cm ²	%	h	°C				dB									
I STAGE	4	120	2×T _{2H}	2600	6000	≤3	31	3100	1650	0.51	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤63									
	5	125								0.47																
	6	125								0.47																
	7	125								0.45																
	8	125								0.45																
	9	80								0.44																
	10	80								0.44																
II STAGE	20	120				≤5				0.13	≥90															
	25	125								0.13																
	50	125								0.13																
	80	125								0.44																
	100	80								0.13																

MAF

MAF-110																										
Symb.	i	T _{2H}	T _{2Max}	n _{2H}	n _{1Max}	j _t	C _{2t}	F _{2HMax}	F _{2Max}	j _t	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	kg/cm ²	N	N	kg/cm ²	%	h	℃				dB									
I STAGE	4	220	2×T _{2H}	2300	6000	≤3	82	7800	4000	2.87	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤65									
	5	260								2.71																
	6	260								2.71																
	7	260								2.62																
	8	260								2.61																
	9	160								2.58																
	10	160								2.57																
II STAGE	20	300				≤5				0.47	≥90															
	25	350								0.47																
	50	350								0.44																
	80	350	0.44																							
	100	220	0.44																							

Performance table

MAF

MAF-140																										
Symb.	i	T _{2N}	T _{2Max}	n _{1N}	n _{1Max}	J ₁	C ₂₁	F _{20Max}	F _{21Max}	J ₁	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	10 ⁴ mm ²	N	N	kgcm ²	%	h	°C				dB									
I STAGE	4	550	2×T _{2N}	2000	5000	≤3	151	12000	8100	7.54	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤66									
	5	600								7.42																
	6	600								7.42																
	7	600								7.14																
	8	550								7.13																
	9	380								7.08																
	10	380								7.03																
II STAGE	20	650				≤5				2.71	≥90															
	25	700								2.71																
	50	700								2.57																
	80	700								2.57																
	100	460								2.57																

MAF-200																										
Symb. Unit	i	T _{2N} N _m	T _{2Max} N _m	n _{1N} rpm	n _{1Max} rpm	j ₁ arcmin	C ₂₁ 10 ⁴ mm ²	F _{20Max} N	F _{21Max} N	J ₁ kgcm ²	η %	L _h h	T °C	Lub	PC	MP										
I STAGE	4	1000	2×T _{2N}	2000	4000	≤3	450	18520	15500	23.4	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤73									
	5	1000								23.4																
	6	1000								23.4																
	7	1000								23.4																
	8	1000								21.8																
	9	650								21.8																
	10	650								21.8																
II STAGE	20	1350				≤5				21.8	≥90															
	25	1400								21.8																
	50	1400								21.8																
	80	1400								21.8																
	100	980								21.8																

Performance table

MAF-255																				
Symb.	i	T _{2N}	T _{2Max}	n _{2N}	n _{2Max}	J ₁	C ₂₁	F _{2NMax}	F _{2Max}	J ₁	η	L _h	T	Lub	PC	MP				
Unit		N _m	N _m	rpm	rpm	arcmin	1/100mm	N	N	kgcm ²	%	h	°C				dB			
I STAGE	4	2100	2×T _{2N}	2000	3000	≤3	1023	27000	24000	180	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77			
	5	2200								170										
	6	2200								170										
	7	2200								170										
	8	2200								170										
	9	1600								150										
	10	1500								150										
II STAGE	20	2400				≤5				64	≥90									
	25	2550								64										
	50	2550								64										
	80	2550	64																	
	100	1900	64																	

MAF

MAF-285																				
Symb.	i	T _{2N}	T _{2Max}	n _{1N}	n _{1Max}	j ₁	C ₂₁	F _{2NMax}	F _{2Max}	J ₁	η	L _h	T	Lub	PC	MP				
Unit		N _m	N _m	rpm	rpm	arcmin	1/100mm	N	N	kgcm ²	%	h	°C				dB			
I STAGE	4	3000	2×T _{2N}	1500	2500	≤3	1300	44000	37000	128.3	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤79			
	5	3150								128.3										
	6	3150								128.3										
	7	3150								128.3										
	8	3000								128.3										
	9	2400								128.3										
	10	2200								128.3										
II STAGE	20	3000				≤5				64.3	≥90									
	25	3150								64.3										
	50	3150								64.3										
	80	3150	64.3																	
	100	2300	64.3																	

MAFQ SERIES



MAFQ相对于MAF有更高的扭矩

The MAFQ has a higher torque than the MAF



造型数据:


Selection data:

扭矩 (Nm)	100-25000
速比	5.5的倍数
背隙 (arcmin)	3-5
最大工作温度 (°C)	90
噪音 (dB)	58-79


Nominal output torque (Nm)	100-25000
Reduction ratio	5.5的倍数
Backlash (arcmin)	3-5
Max.working temperature (°C)	90
Noise (dB)	58-79

Drawing / Size

MAFQ-090-L1

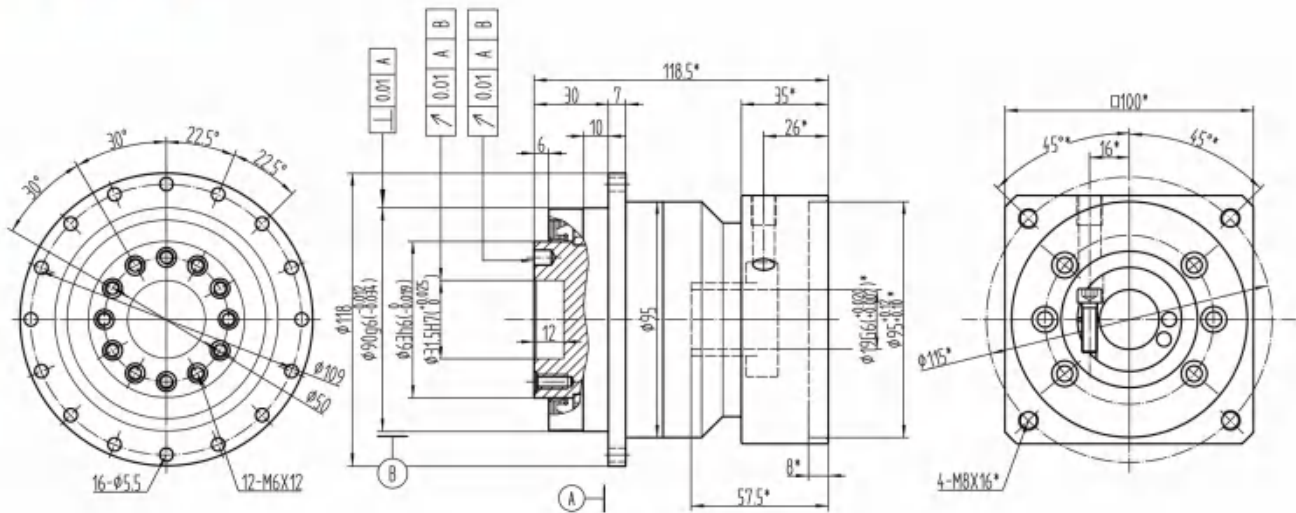


MAFQ-090-L2

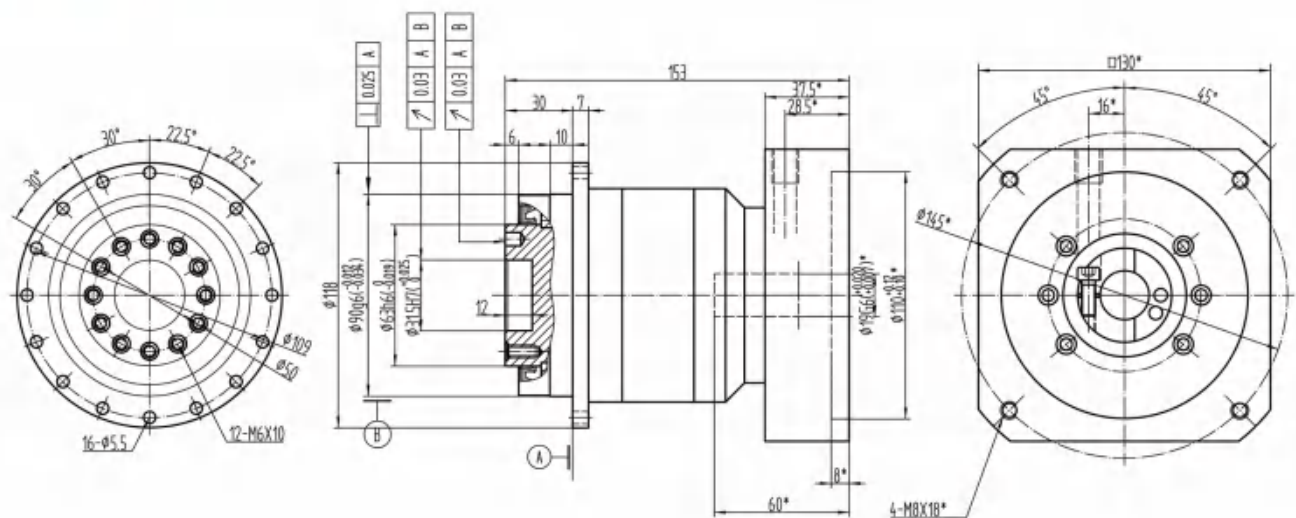


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFQ-110-L1

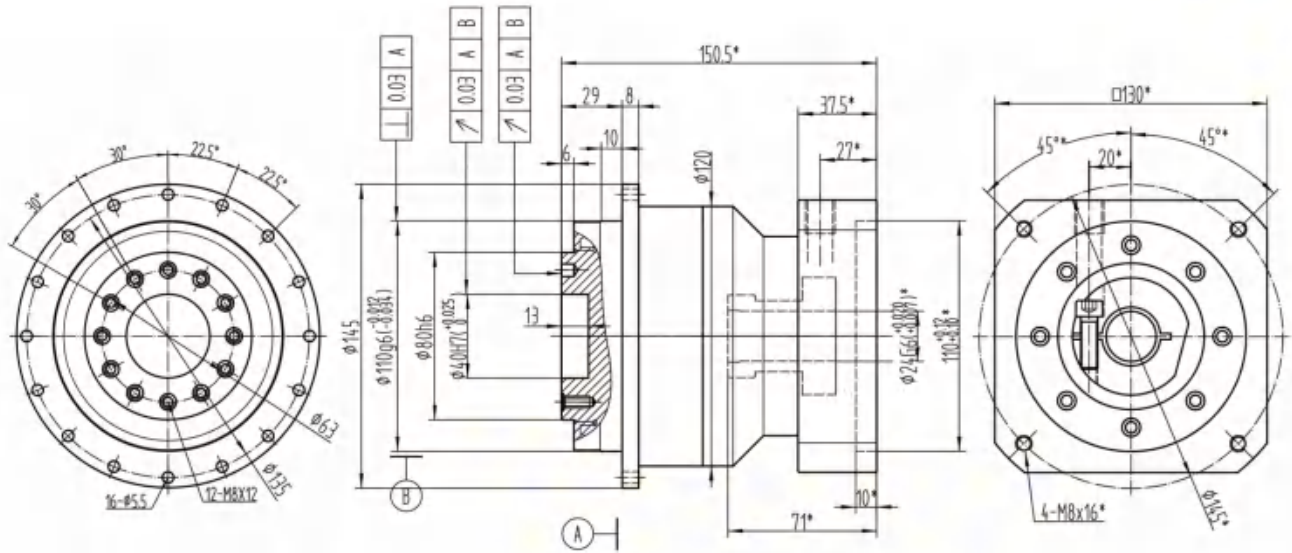


MAFQ-110-L2

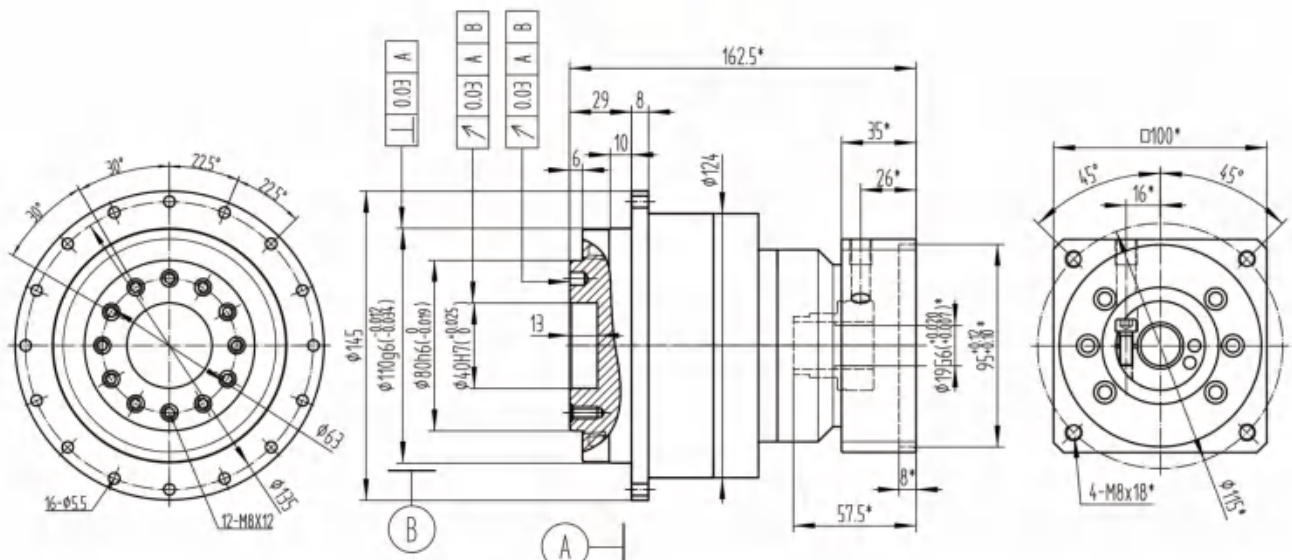


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFQ-140-L1

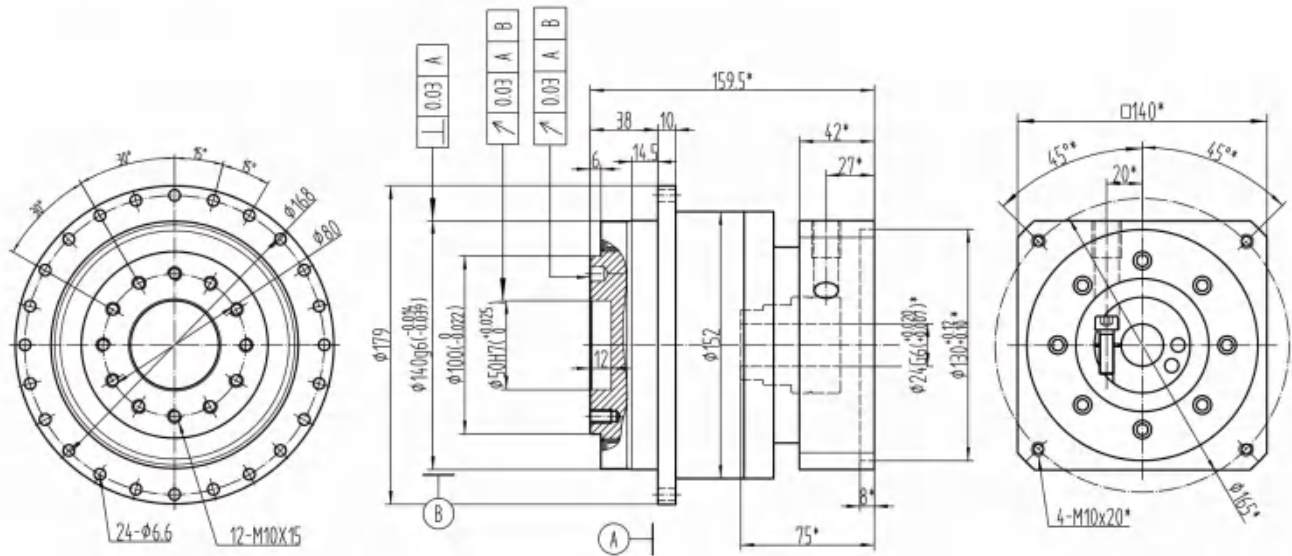


MAFQ-140-L2

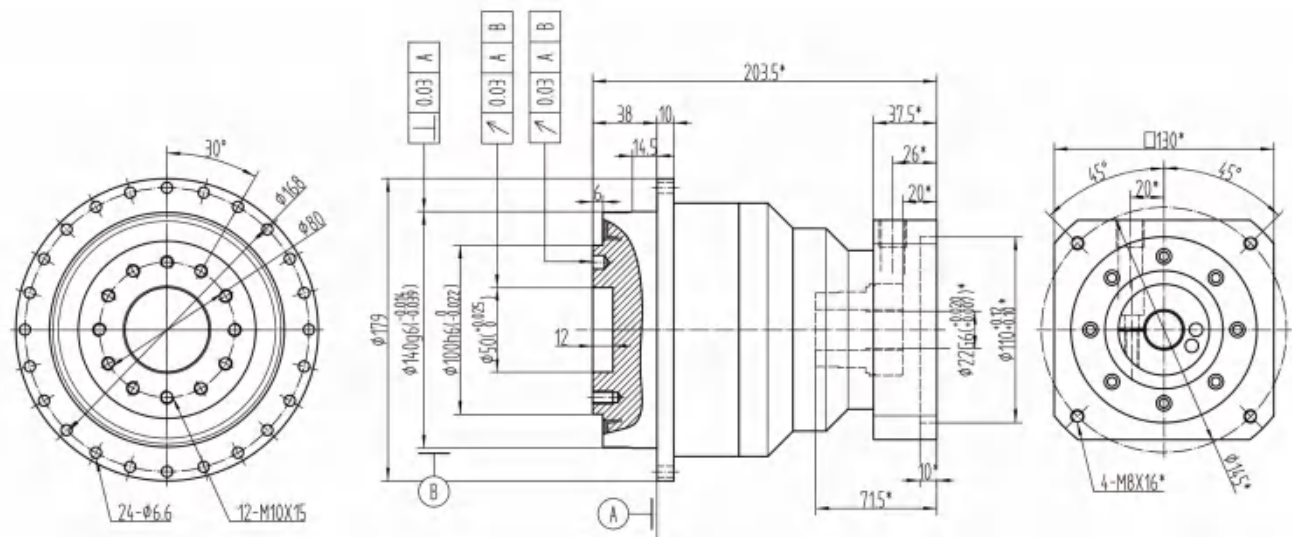


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸；代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFQ-200-L1

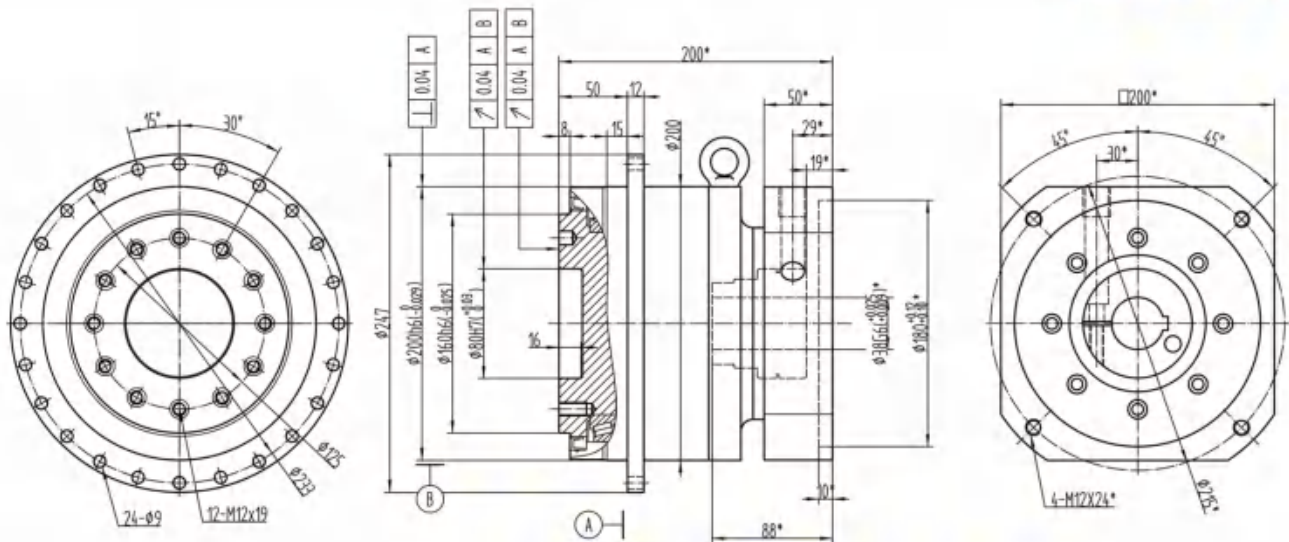


MAFQ-200-L2

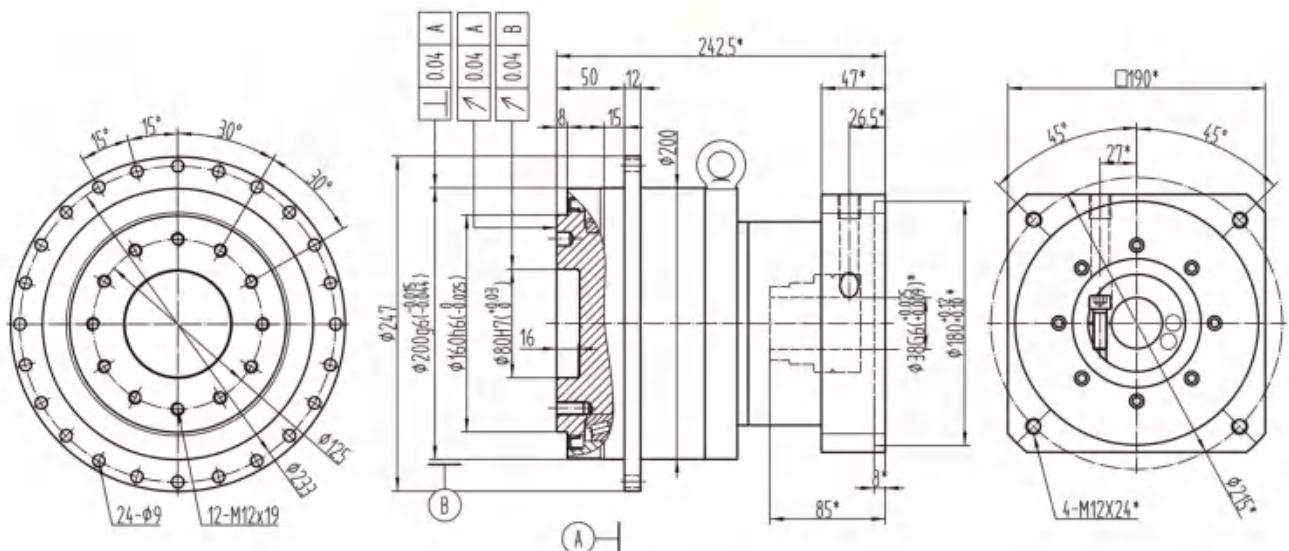


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFQ-255-L1

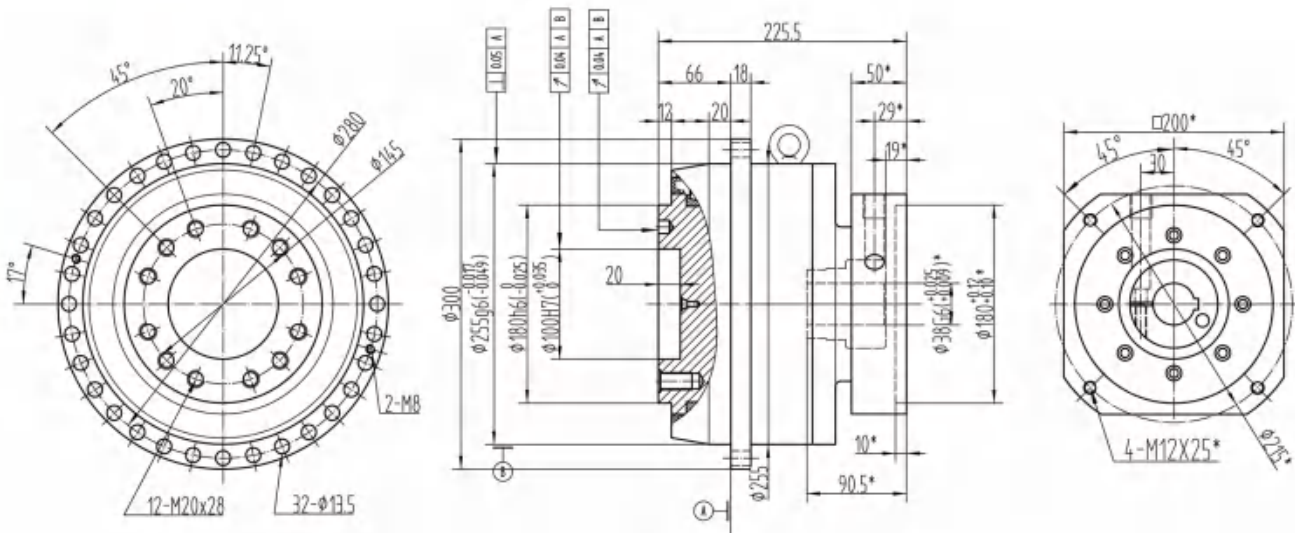


MAFQ-255-L2

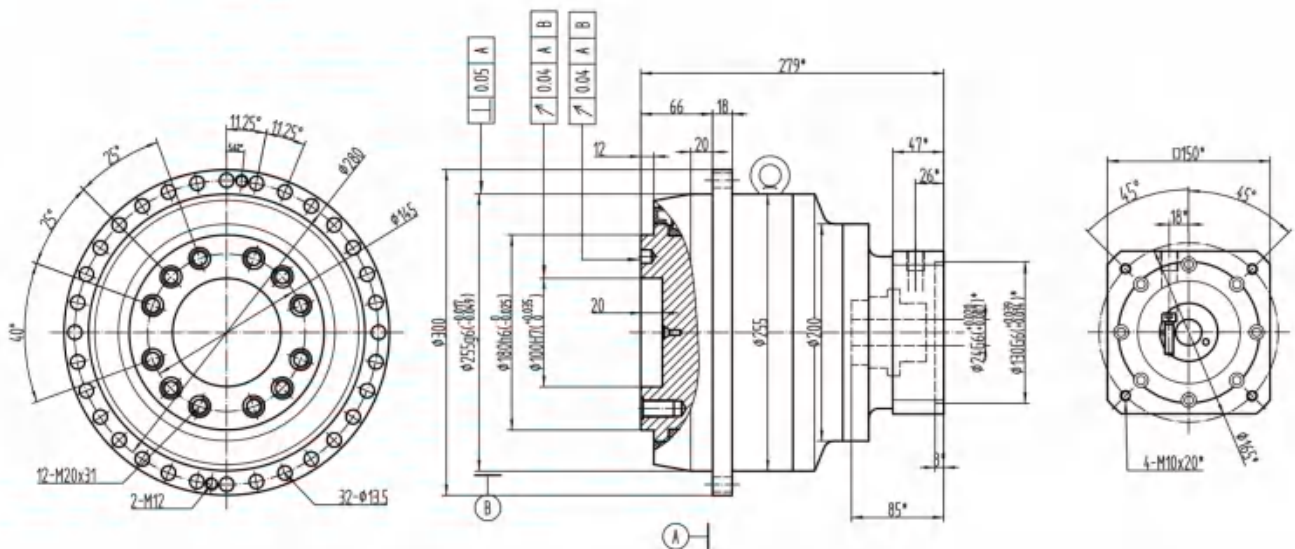

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MAFQ-285-L1

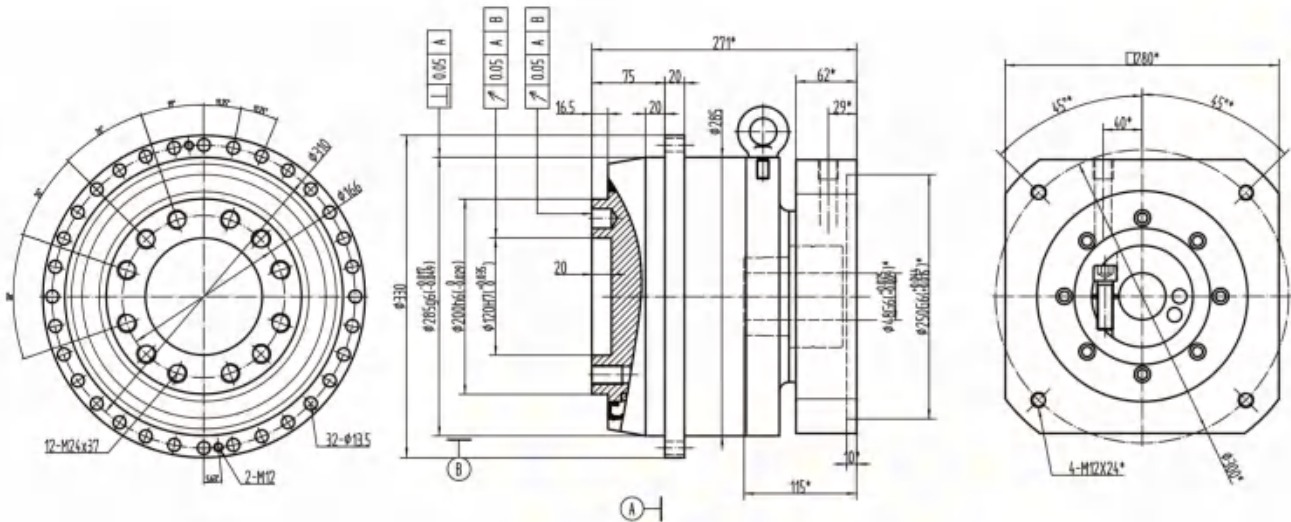

MAFQ


MAFQ-285-L2

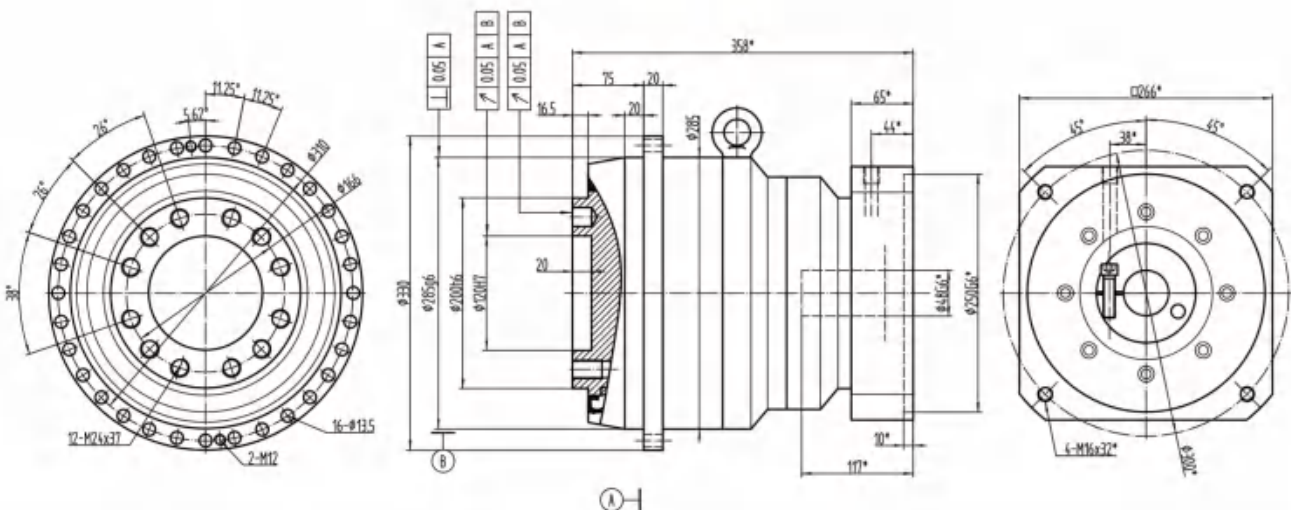


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFQ-365-L1

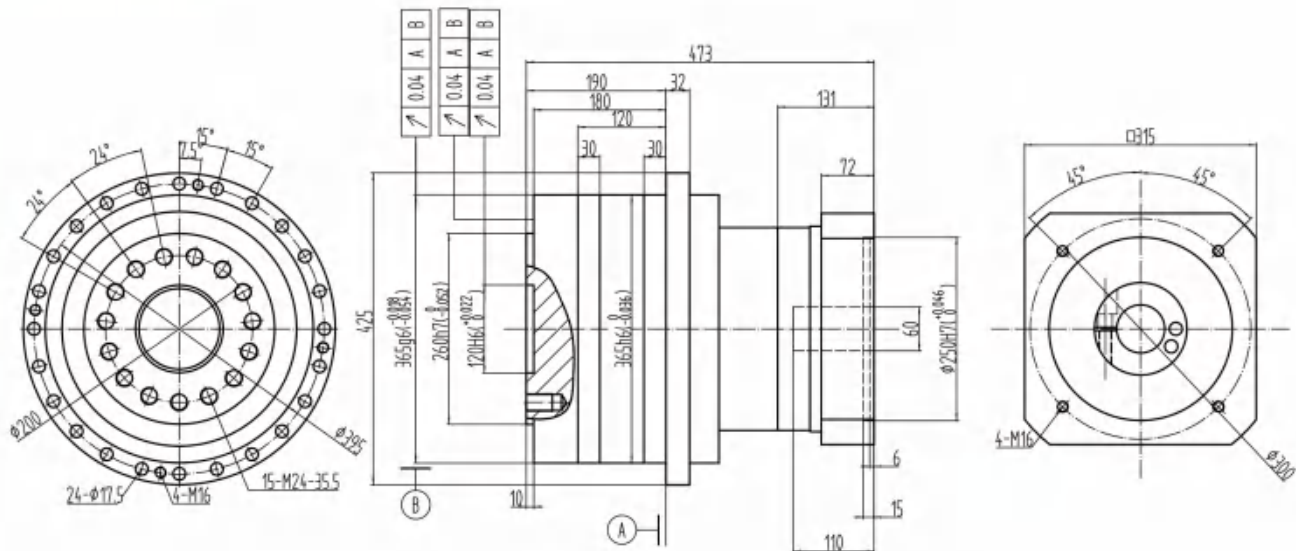


MAFQ-365-L2

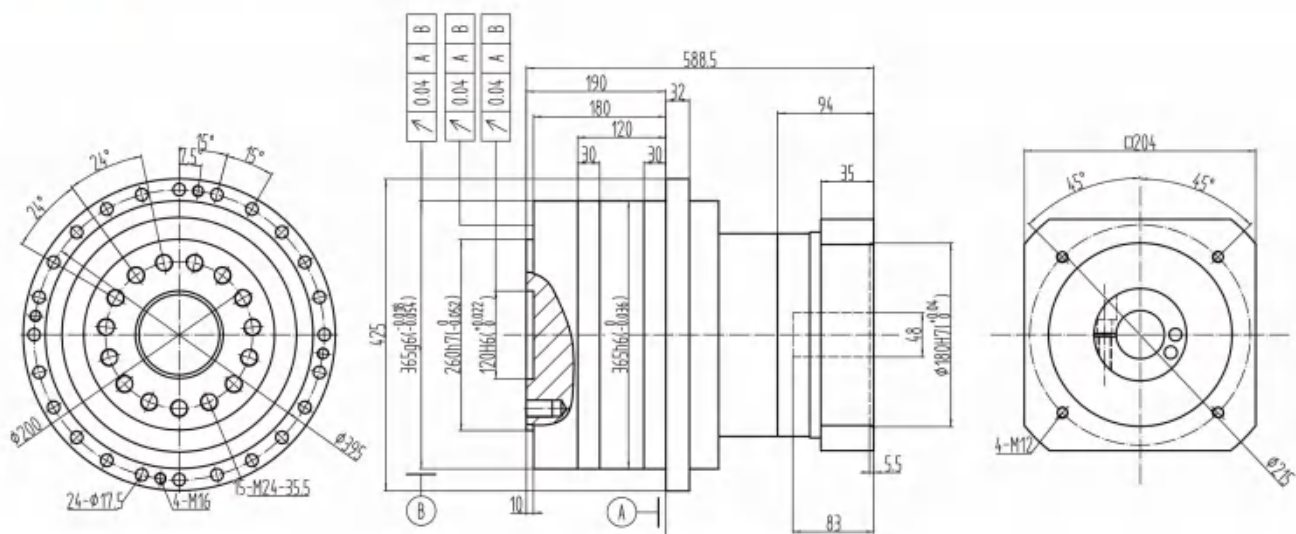

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MAFQ-470-L1

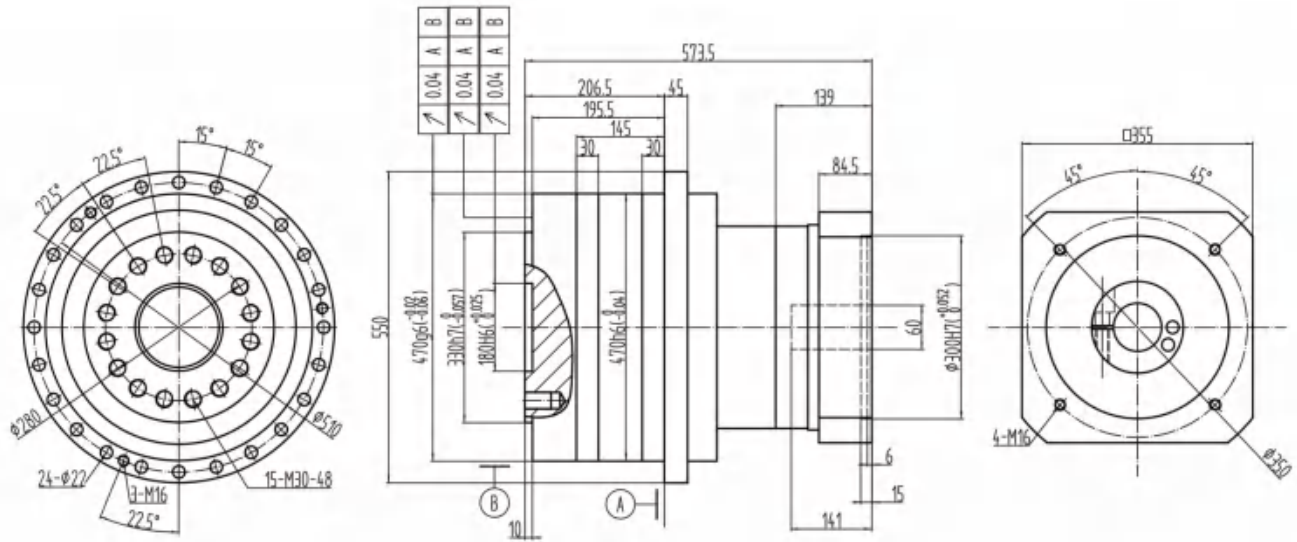

MAFQ

MAFQ-470-L2

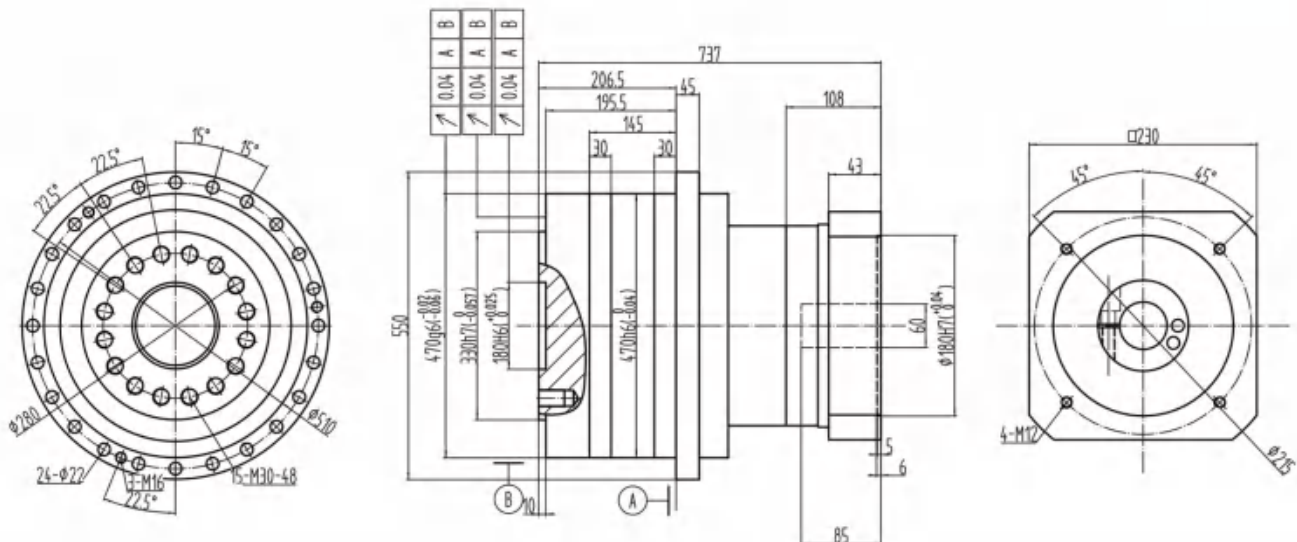

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MAFQ

MAFQ-90																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2RMax}	F _{2AMax}	J ₁	η	U ₁	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	1/rev	N	N	kgcm ²	%	h	°C				dB
I STAGE	5.5	100	2xT _{2N}	2600	6000	≤3	41	3100	1650	0.47	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤63
	22	120															
II STAGE	27.5	120															
	38.5	130															
	55	130															

MAFQ-110																										
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2RMax}	F _{2AMax}	J ₁	η	U ₁	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	(Nvis)arcmin	N	N	kgcm ²	%	h	°C				dB									
I STAGE	5.5	280	2xT _{2N}	2300	6000	≤3	101	7800	4000	2.71	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤64									
	22	290																								
II STAGE	27.5	300				≤5				0.44	≥90															
	38.5	320																								
	55	320																								

MAFQ-140																	
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	J _t arcmin	C _{2t} kg/mm ²	F _{2RMMax} N	F _{2DMMax} N	J ₁ kg/cm ²	η %	L _h h	T °C	Lub	PC	MP	dB
I STAGE	55	500	2xT _{2N}	2000	5000	≤3	216	12000	8100	7.42	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤65
	22	650															
II STAGE	275	650															
	385	680															
	55	680															

MAFQ-200																										
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2RMMax}	F _{2DMMax}	J ₁	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	kg/cm ²	N	N	kg/cm ²	%	h	°C				dB									
I STAGE	55	1400	2xT _{2N}	2000	4000	≤3	621	18520	15500	23.4	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤66									
	22	1700																								
II STAGE	27.5	1700				≤5				21.8	≥90															
	38.5	1700																								
	55	1700																								

Performance table

MAFQ

MAFQ-255																										
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{255Max}	F _{255Max}	J ₁	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB									
I STAGE	5.5	3800	2xT _{2N}	2000	3000	≤3	1191	27000	24000	170	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤68									
	22	3800																								
II STAGE	27.5	3800				≤5				64	≥90															
	38.5	3800																								
	55	3800																								

MAFQ-285																	
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	j _t arcmin	C _{2t} Nm/arcmin	F _{285Max} N	F _{24Max} N	J _t kgcm ²	η %	L _h h	T °C	Lub	PC	MP	dB
I STAGE	5.5	6500	2xT _{2N}	1500	2500	≤3	1940	44000	37000	128.3	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤70
II STAGE	22	6500															
	27.5	6500				≤5				64.3	≥90						
	38.5	6500															
	55	6500															

MAFQ-365																	
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	J _L arcmin	C _{2t} mm/mm	F _{2RMMax} N	F _{2RMMax} N	J ₁ kgcm ²	η %	L _h h	T °C	Lub	PC	MP	
I STAGE	5.5	13000	2xT _{2N}	1500	2000	≤3	3515	55000	49000	242.2	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤72
	22	13000				≤5					≥90						
II STAGE	27.5	13000															
	38.5	13000															
	55	13000															


MAFQ-470																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _L	C _{2t}	F _{2RMMax}	F _{2Max}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	mm/mm	N	N	kgcm ²	%	h	°C				dB
I STAGE	5.5	25000	2xT _{2N}	1200	2000	≤3	6153	66000	54000	4517	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤75
	22	25000															
II STAGE	27.5	25000															
	38.5	25000															
	55	25000															

MPVB SERIES



此标准系列可以在中等精度要求的不同领域使用。

Standard series for servo applications that do not require optimum precision.

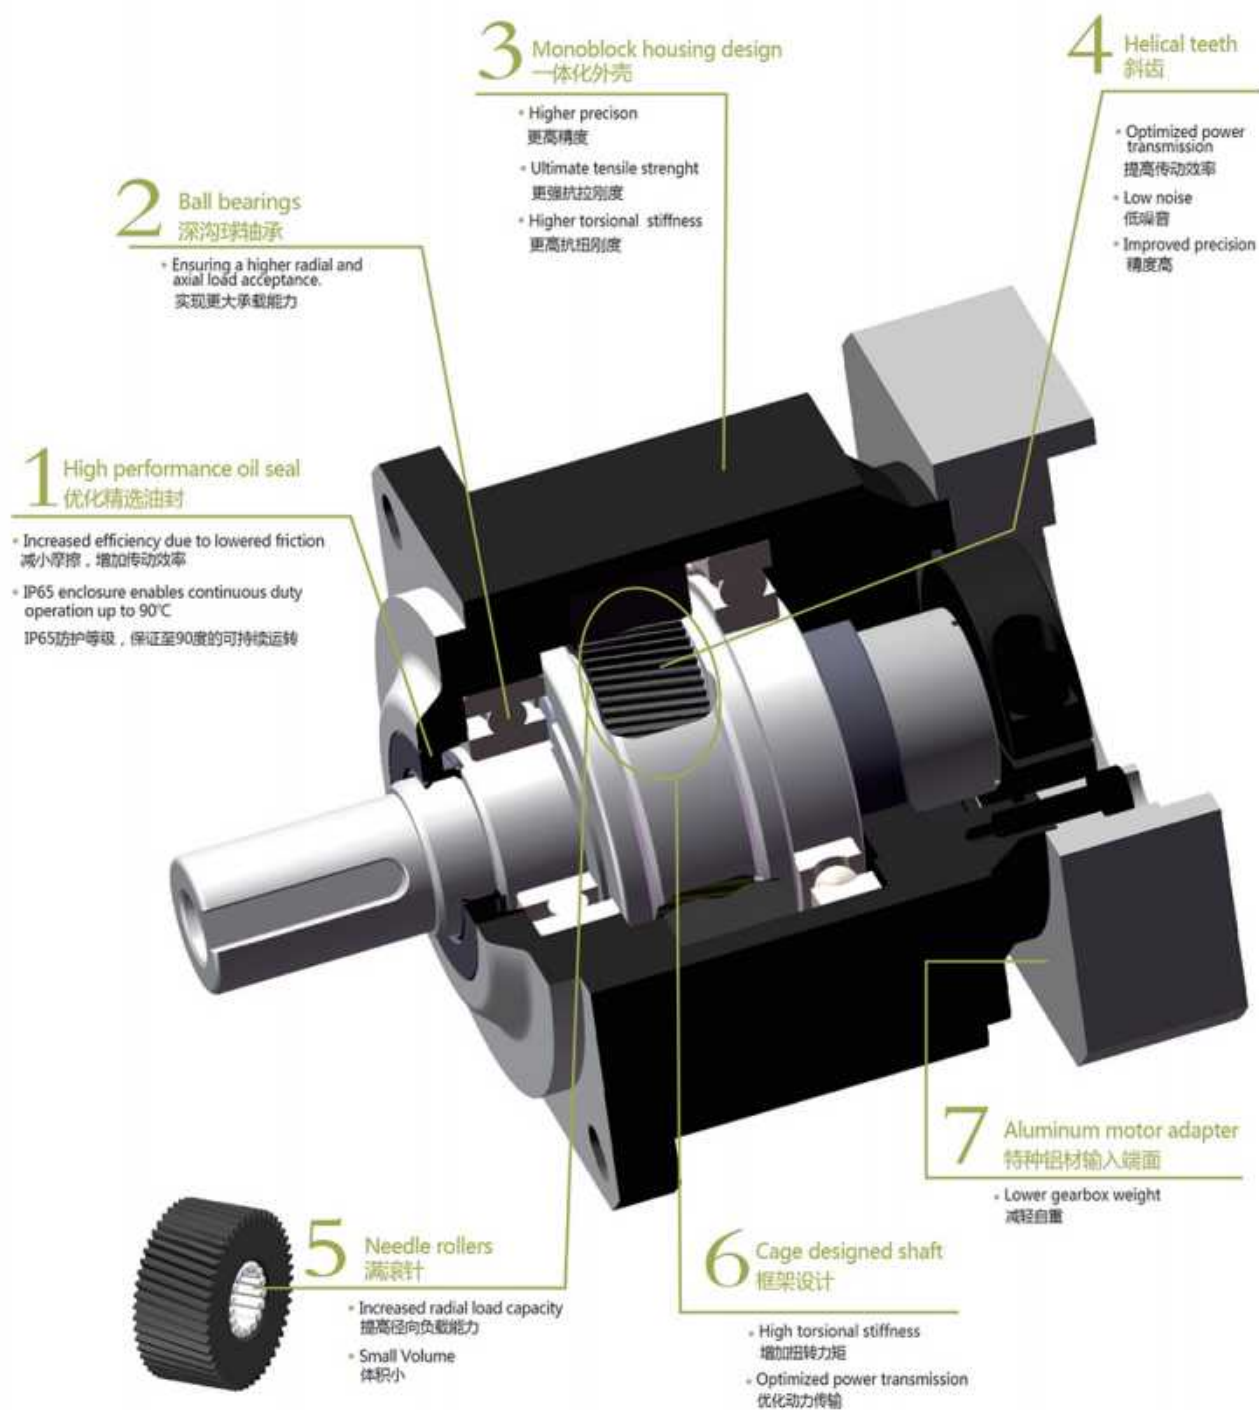

造型数据：


Selection data:

扭矩 (Nm)	25-360
速比	3-100
背隙 (arcmin)	3-5
最大工作温度 (°C)	90
噪音 (dB)	67-70


Nominal output torque (Nm)	25-360
Reduction ratio	3-100
Backlash (arcmin)	3-5
Max.working temperature (°C)	90
Noise (dB)	67-70

Drawing / Size

MPVB-060A-L1

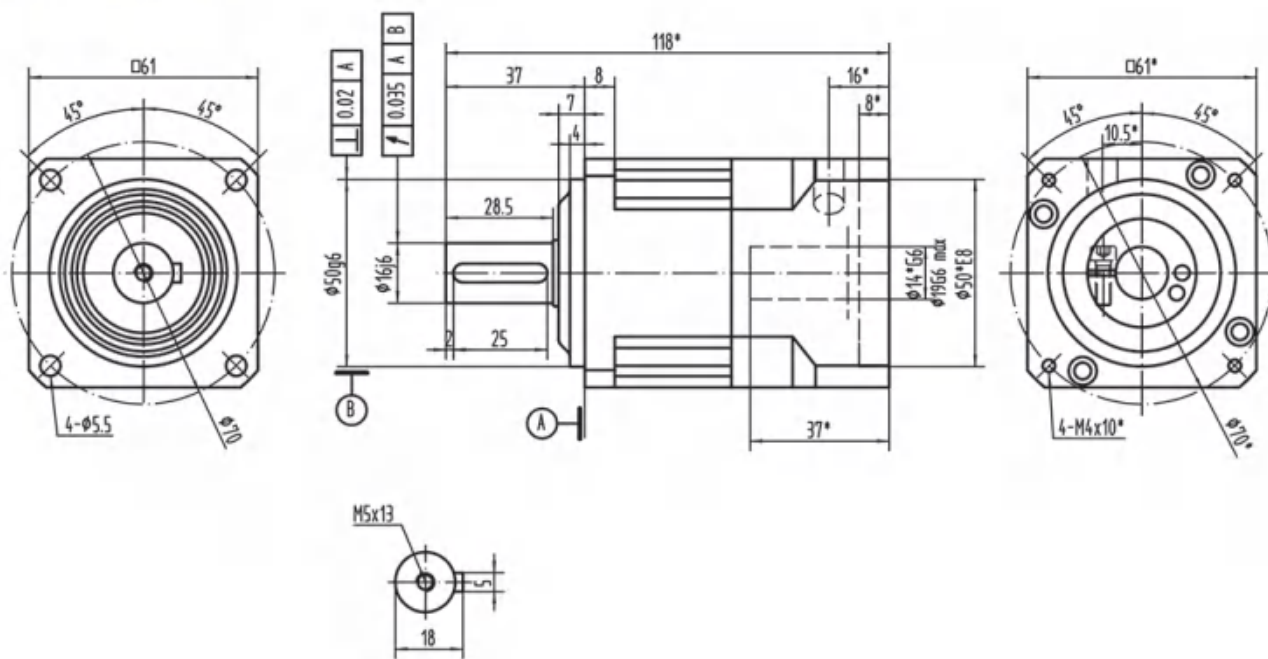


MPVB-060A-L2

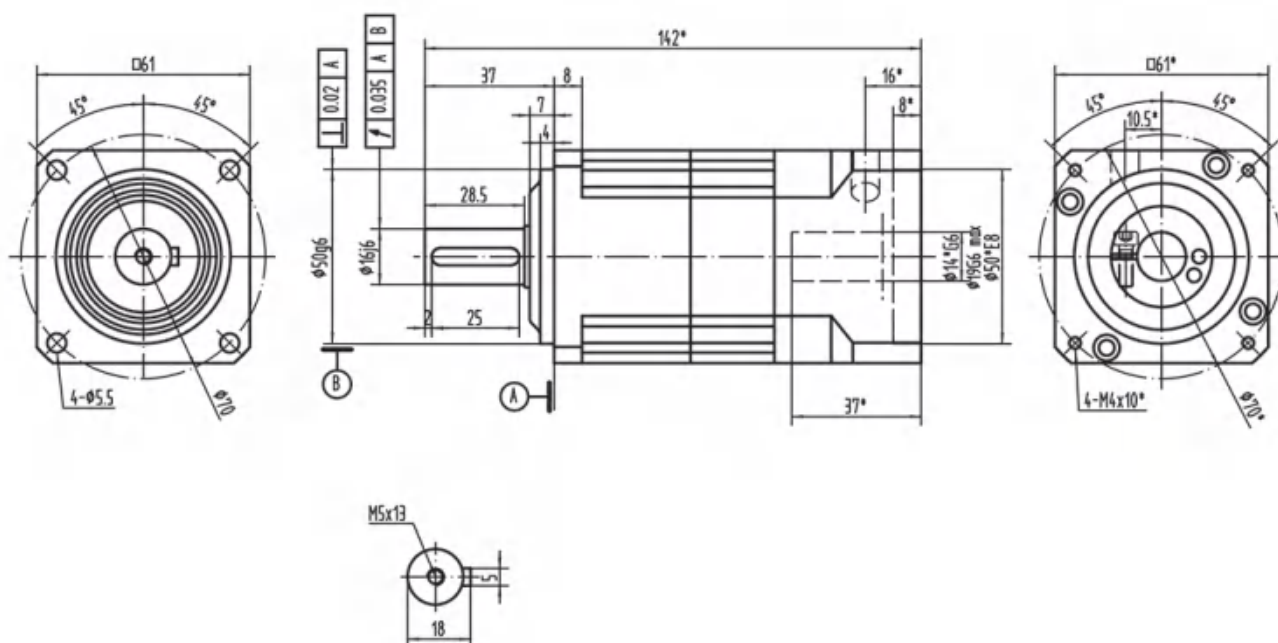

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MPVB-060B-L1

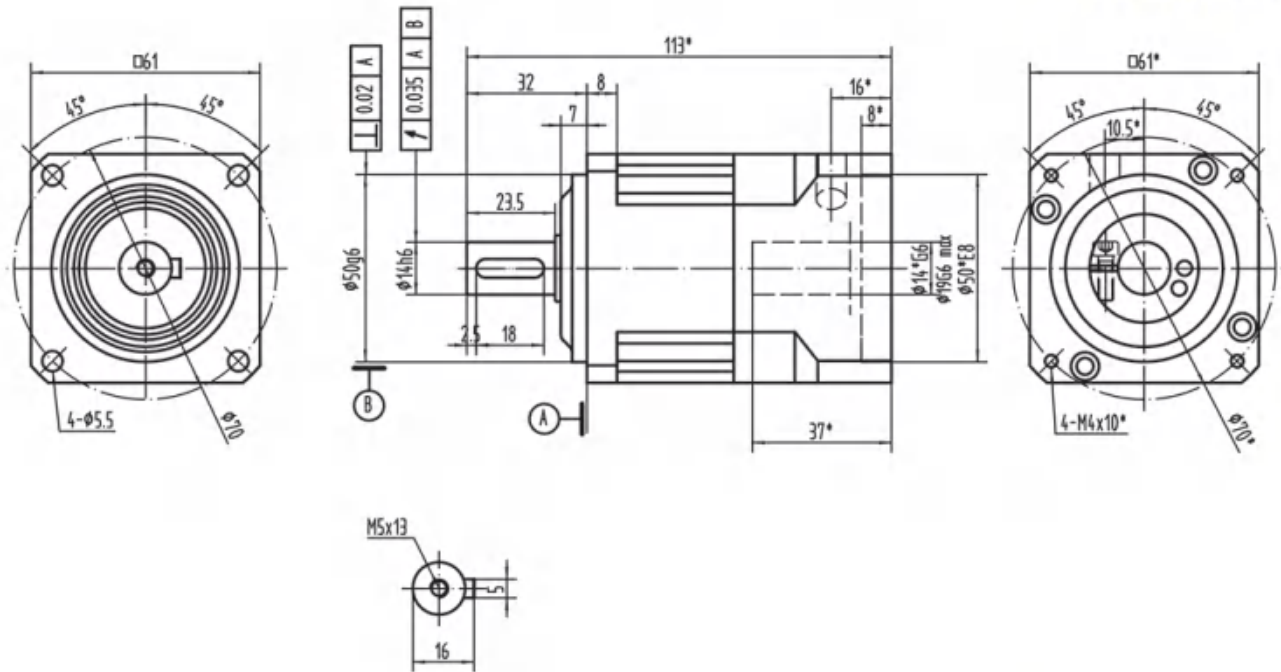

MPVB


MPVB-060B-L2

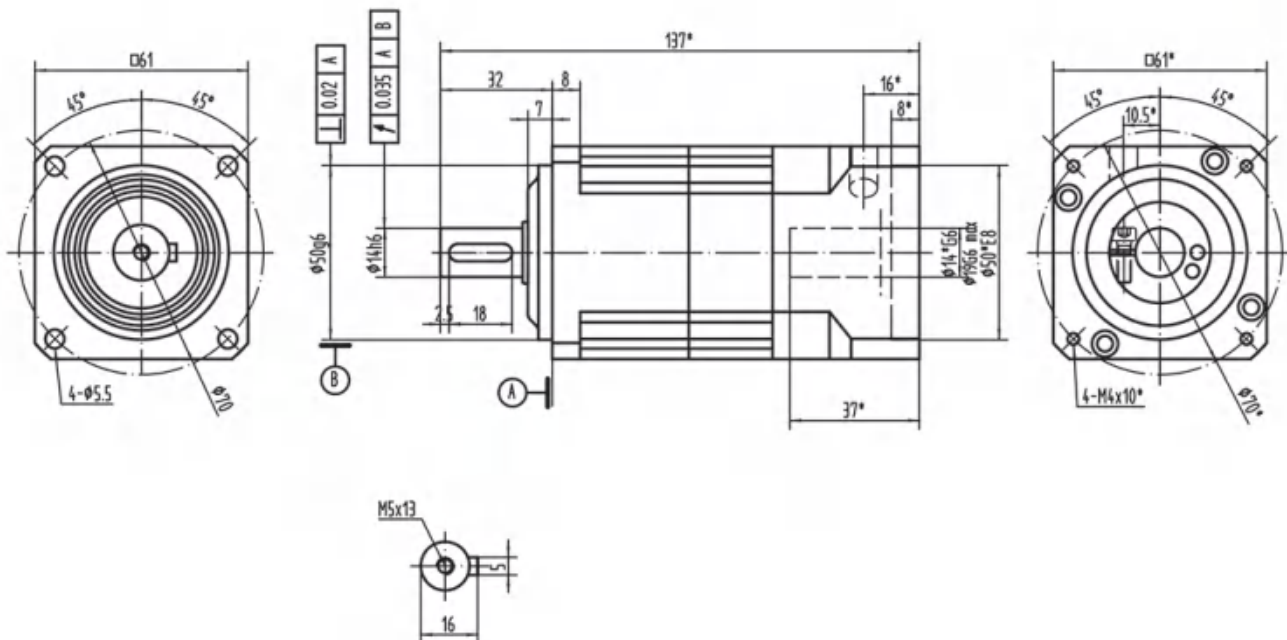


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MPVB-090A-L1

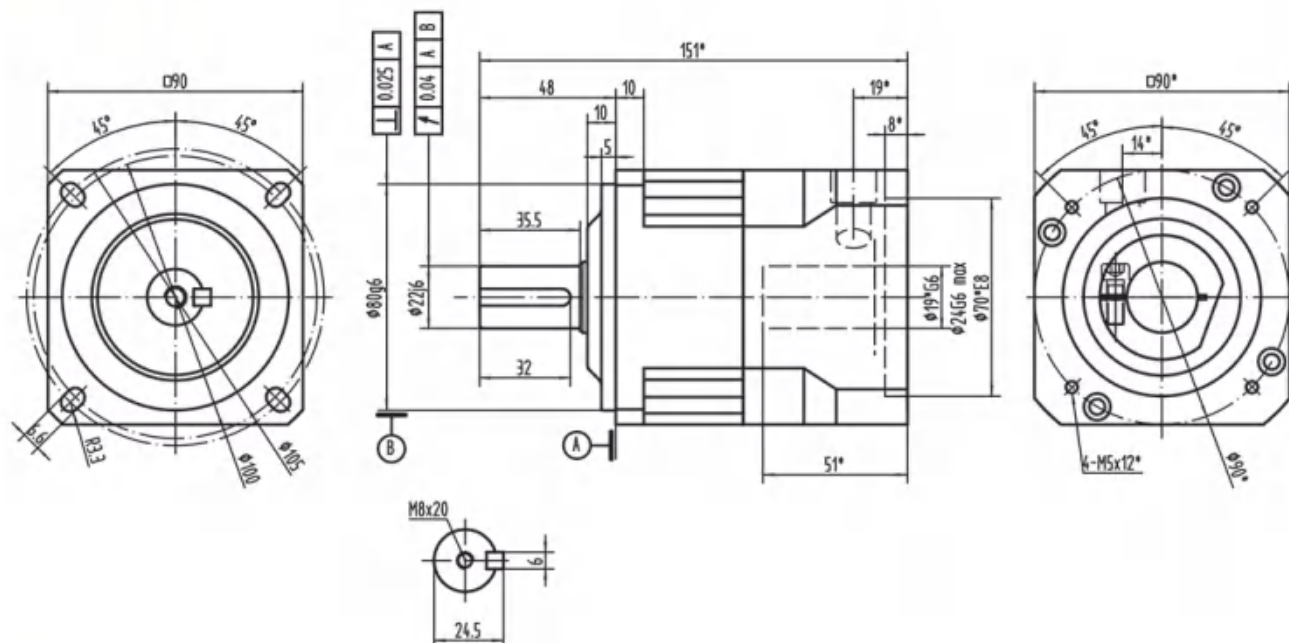


MPVB-090A-L2

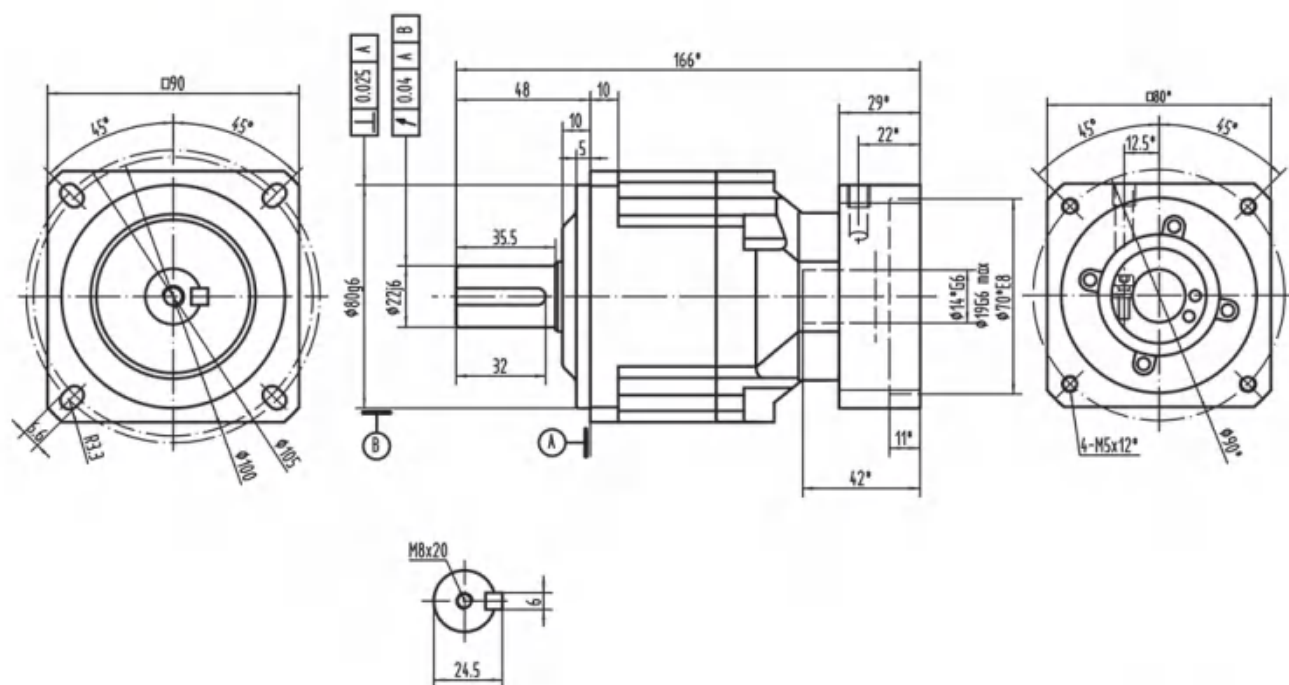

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MPVB-090B-L1

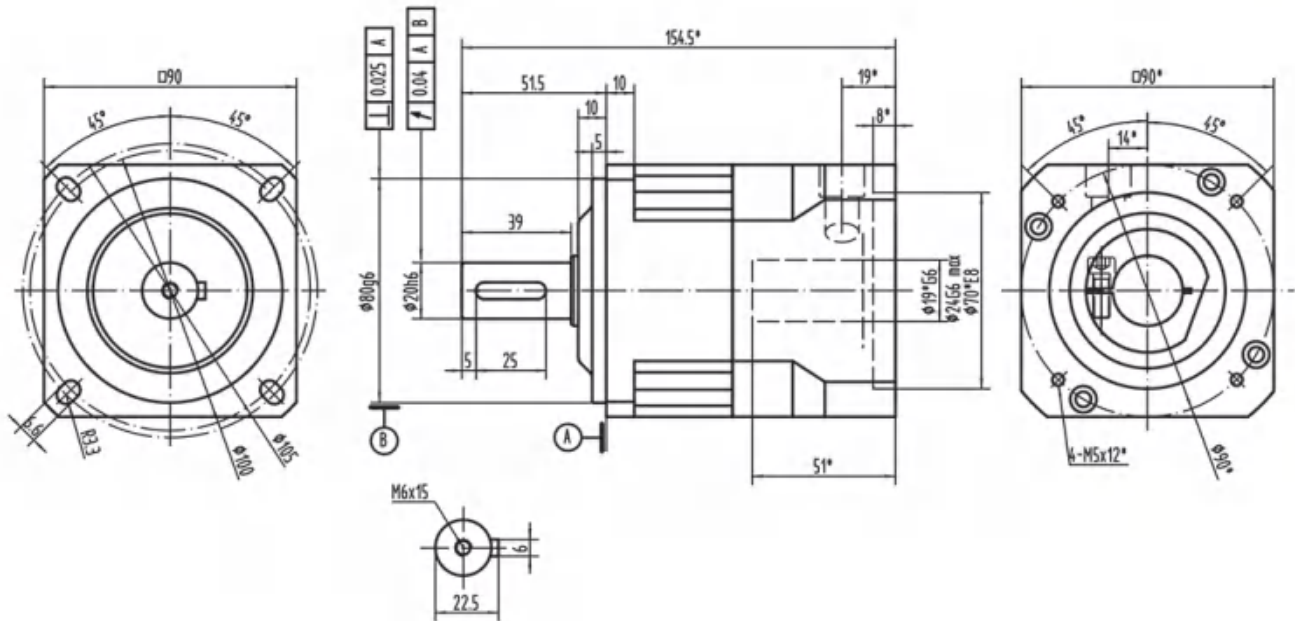

MPVB


MPVB-090B-L2

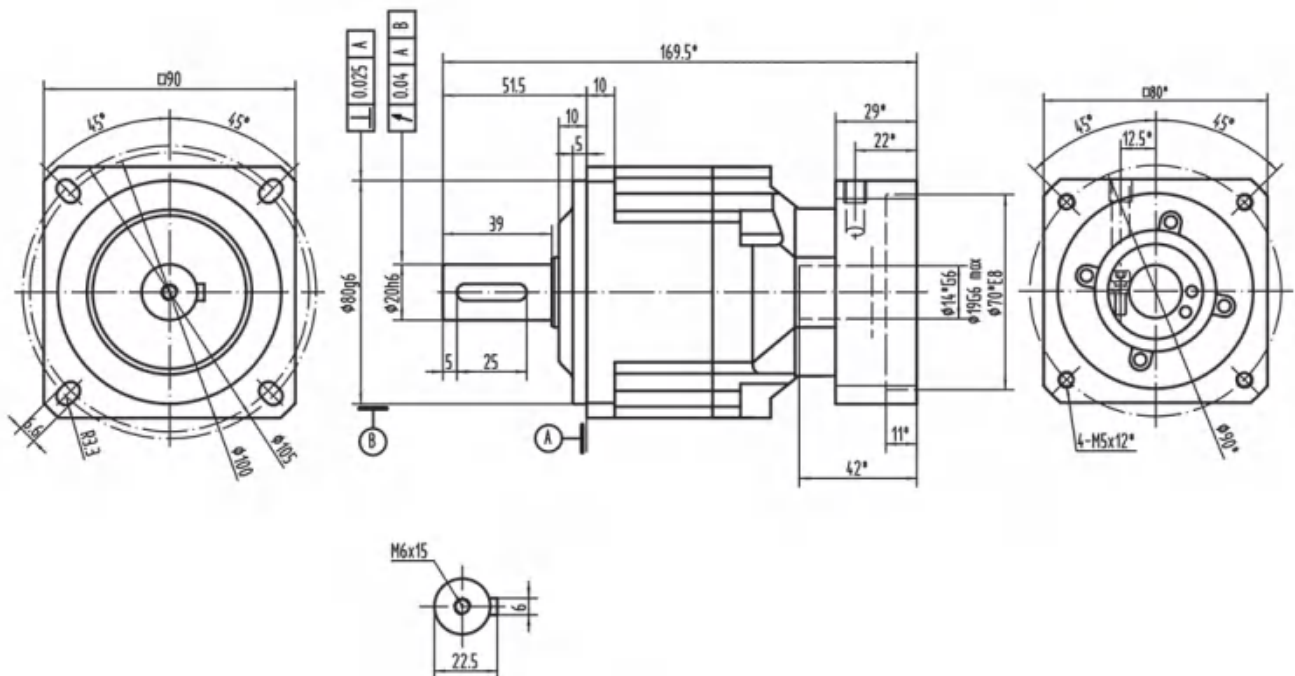


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MPVB-115A-L1

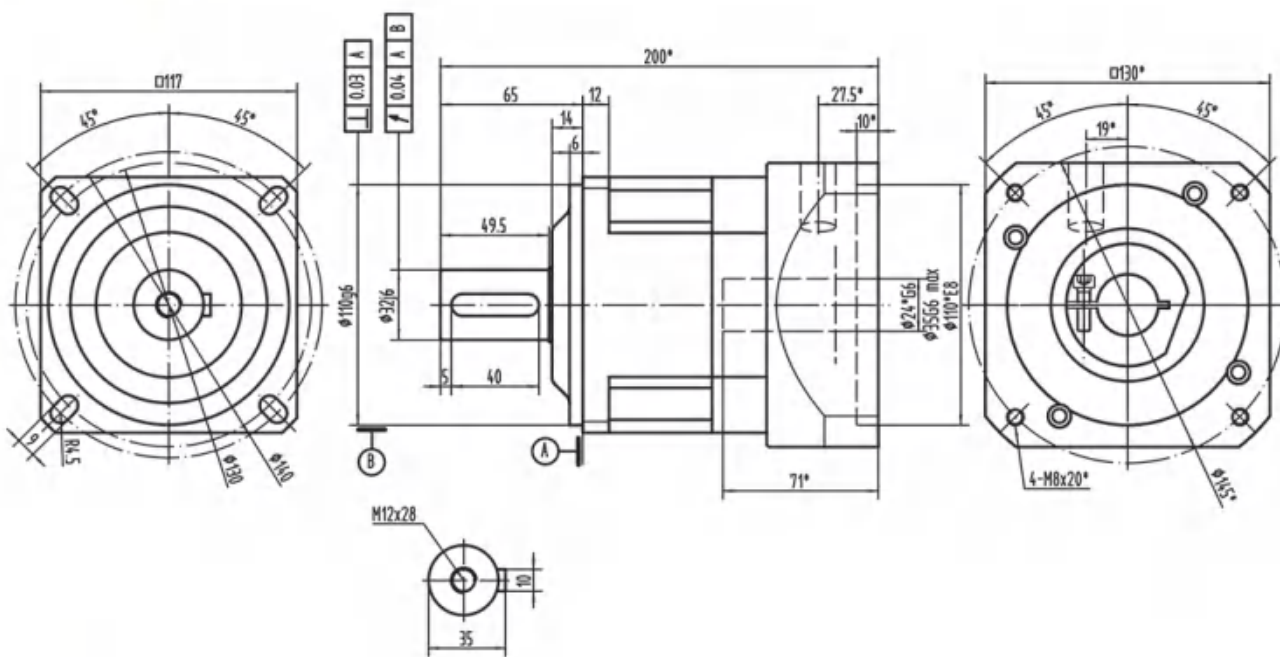

MPVB-115A-L2

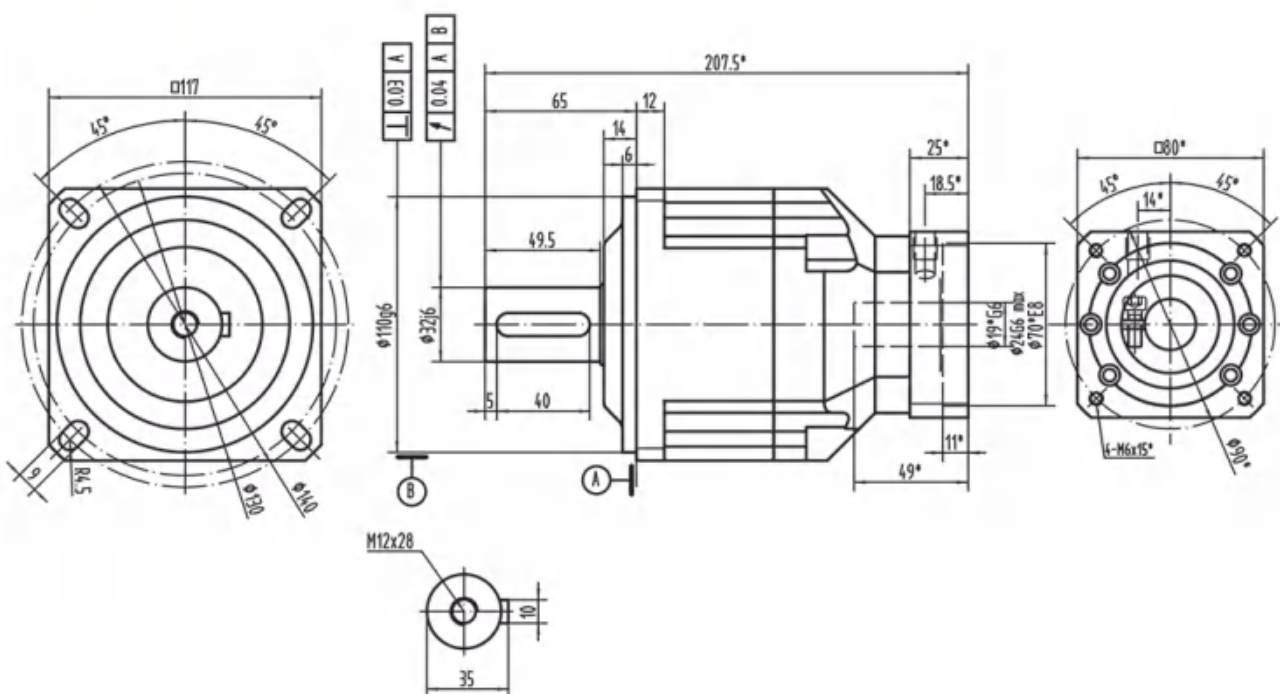


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MPVB-115B-L1

MPVB

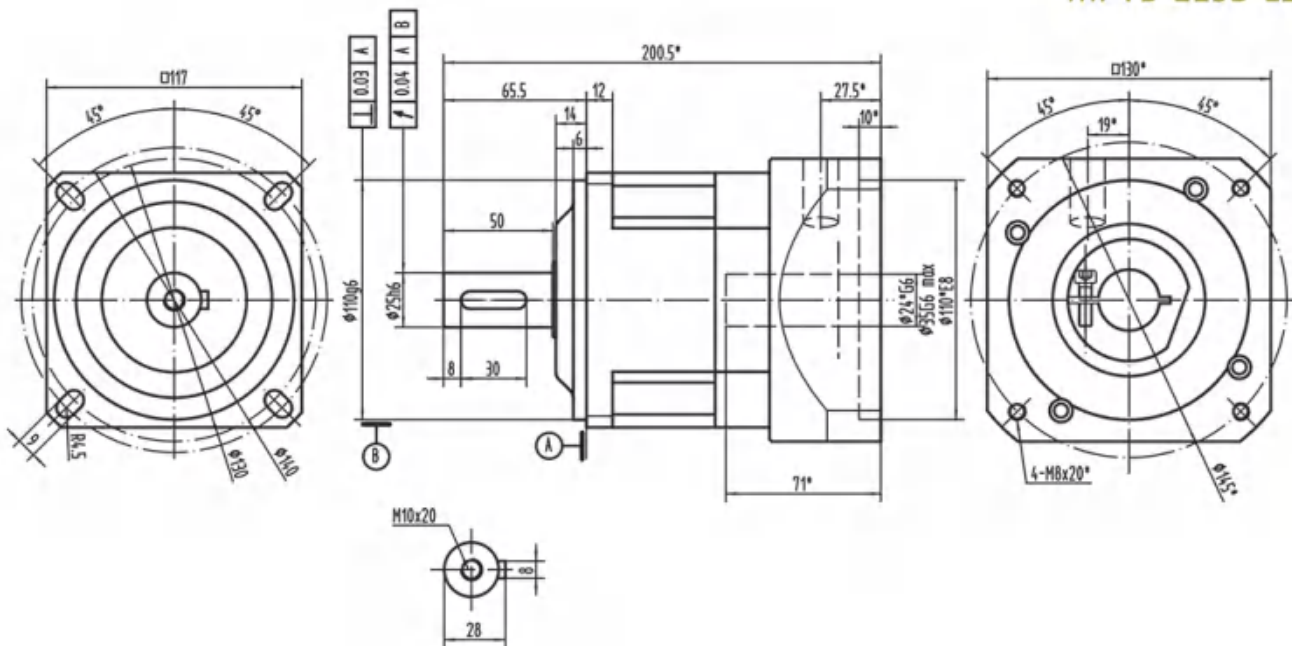

MPVB-115B-L2

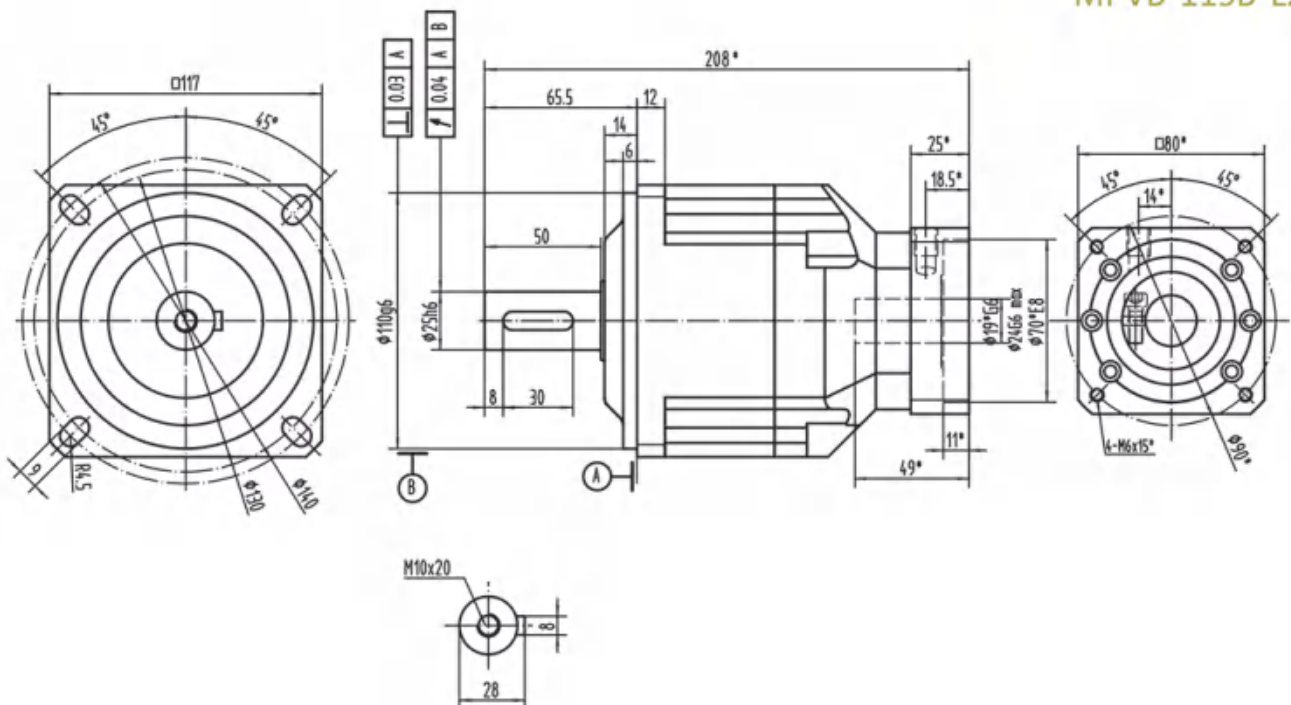

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MPVB

MPVB-060																				
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	j ₁ arcmin	C _{2t} mm/arcmin	F _{2RMax} N	F _{2Max} N	J ₁ kgcm ²	η %	L _h h	T ℃	Lub	PC	MP	dB			
I STAGE	3	25	2×T _{2N}	3000	6000	≤3	7	1200	1050	0.16	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤67			
	4	40					7			0.14										
	5	40					7			0.13										
	6	40					7			0.13										
	7	40					7			0.13										
	8	40					7			0.13										
	9	25					7			0.13										
	10	25					7			0.13										
	II STAGE	15					35			≤5								7	0.13	≥90
		20					50											7	0.13	
35		50	7	0.13																
40		50	7	0.13																
50		50	7	0.13																
80		50	7	0.13																
100		35	7	0.13																

MPVB-090																				
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	j ₁ arcmin	C _{2t} Nm/arcmin	F _{2RM} N	F _{2MM} N	J ₁ kgcm ²	η %	L _h h	T ℃	Lub	PC	MP				
I STAGE	3	80	2×T _{2N}	3000	6000	≤3	14	2450	2200	0.61	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤68			
	4	120					14			0.48										
	5	125					14			0.47										
	6	125					14			0.47										
	7	125					14			0.45										
	8	125					14			0.45										
	9	80					14			0.42										
	10	80					14			0.4										
	II STAGE	15					80			≤5								14	0.13	≥90
		20					125											14	0.13	
35		125	14	0.13																
40		125	14	0.13																
50		125	14	0.13																
80		125	14	0.13																
100		80	14	0.13																

Performance table

MPVB-115																	
Symb.	i	T _{2N}	T _{2hot}	n _{1N}	n _{1Max}	J _t	C ₂	F _{2PMax}	F _{2MMax}	J ₁	η	U _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	160	2×T _{2N}	3000	6000	≤3	25	4400	4000	3.25	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤70
	4	220					25			2.74							
	5	260					25			2.71							
	6	260					25			2.71							
	7	260					25			2.62							
	8	260					25			2.6							
	9	160					25			2.59							
	10	160					25			2.57							
II STAGE	15	220				≤5	25			0.45	≥90						
	20	300					25			0.45							
	35	350	25	0.45													
	40	360	25	0.45													
	50	350	25	0.4													
	80	360	25	0.4													
	100	220	25	0.4													


MPVE SERIES



MOTOREDUCER

此标准系列可以在中等精度要求的不同领域使用。

Standard series for servo applications that do not require optimum precision.

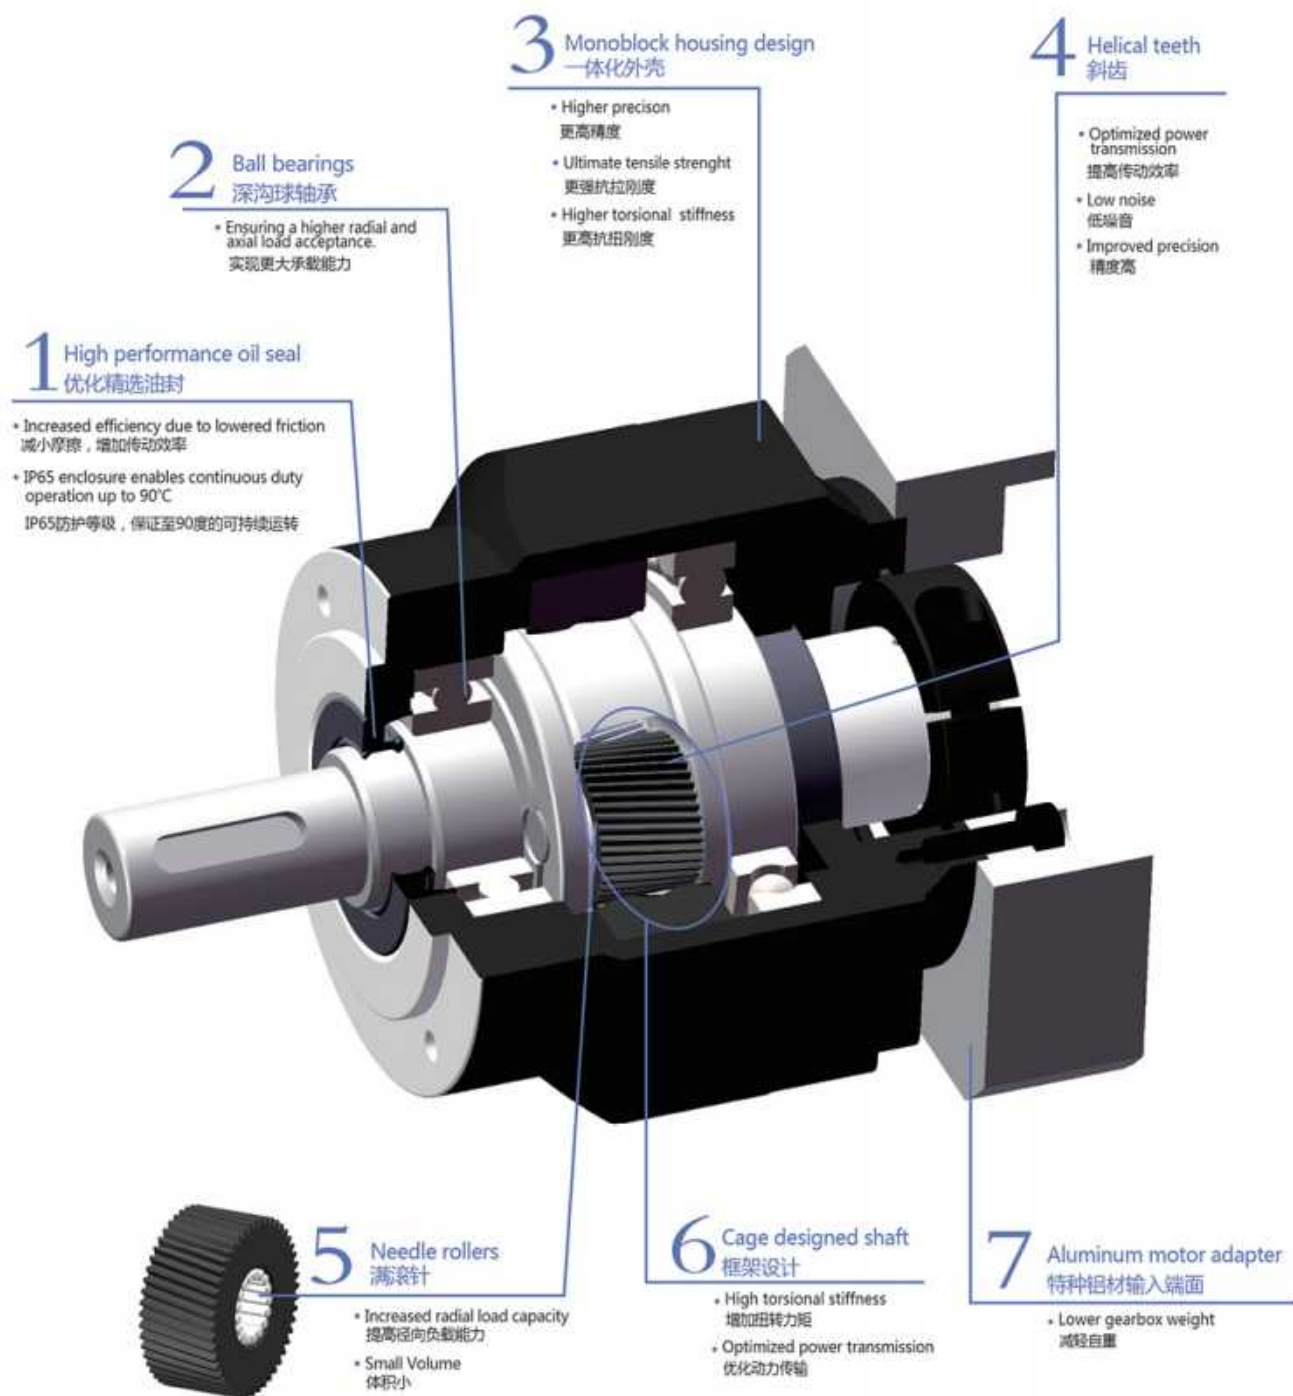

造型数据:


Selection data:

扭矩 (Nm)	25-360
速比	3-100
背隙 (arcmin)	3-5
最大工作温度 (°C)	90
噪音 (dB)	67-70

Nominal output torque (Nm)	25-360
Reduction ratio	3-100
Backlash (arcmin)	3-5
Max.working temperature (°C)	90
Noise (dB)	67-70


Drawing / Size

MPVE-060A-L1

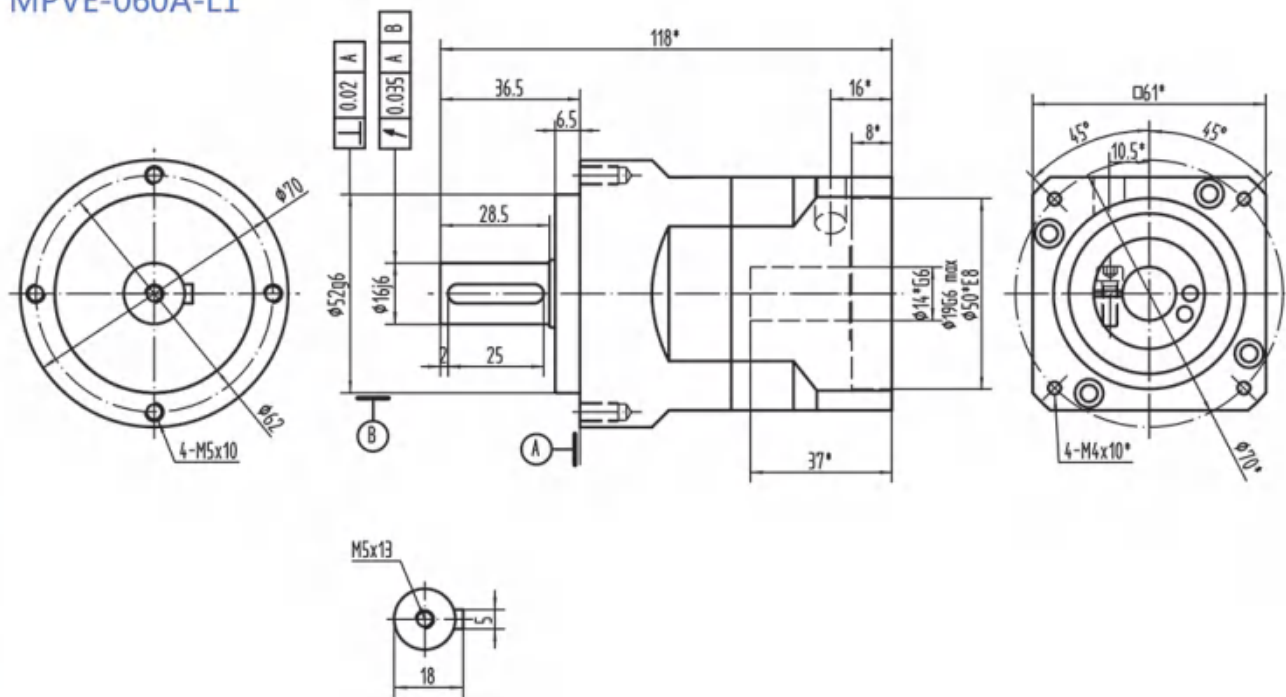

MPVE


MPVE-060A-L2

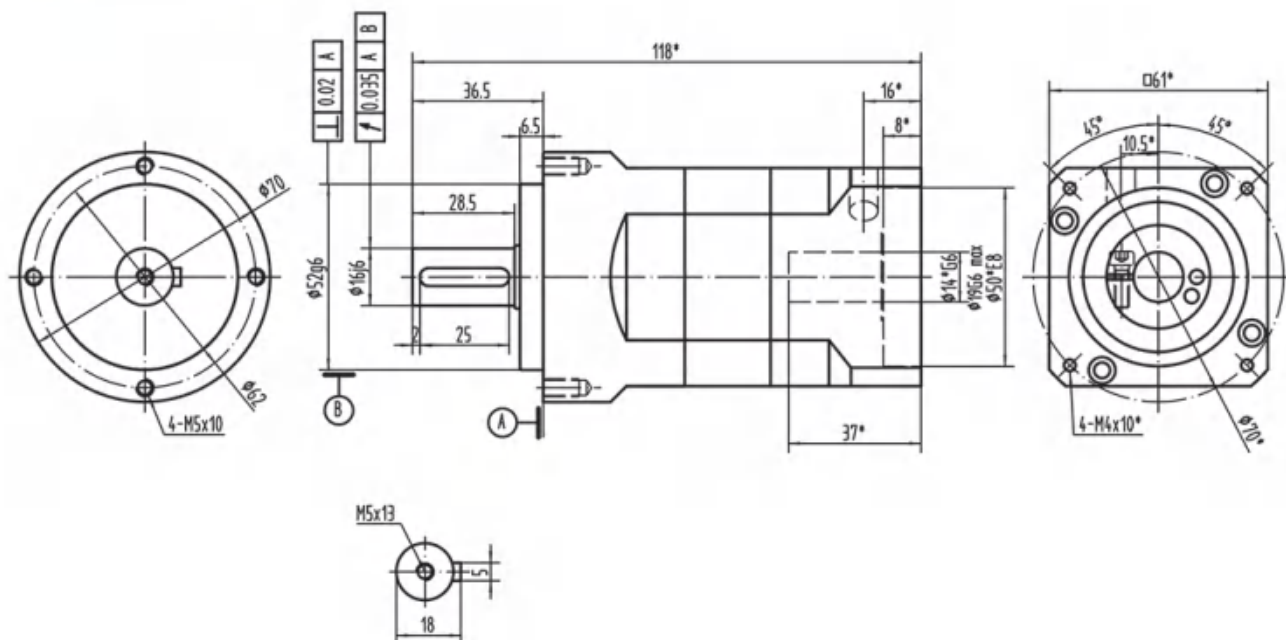


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MPVE-060B-L1

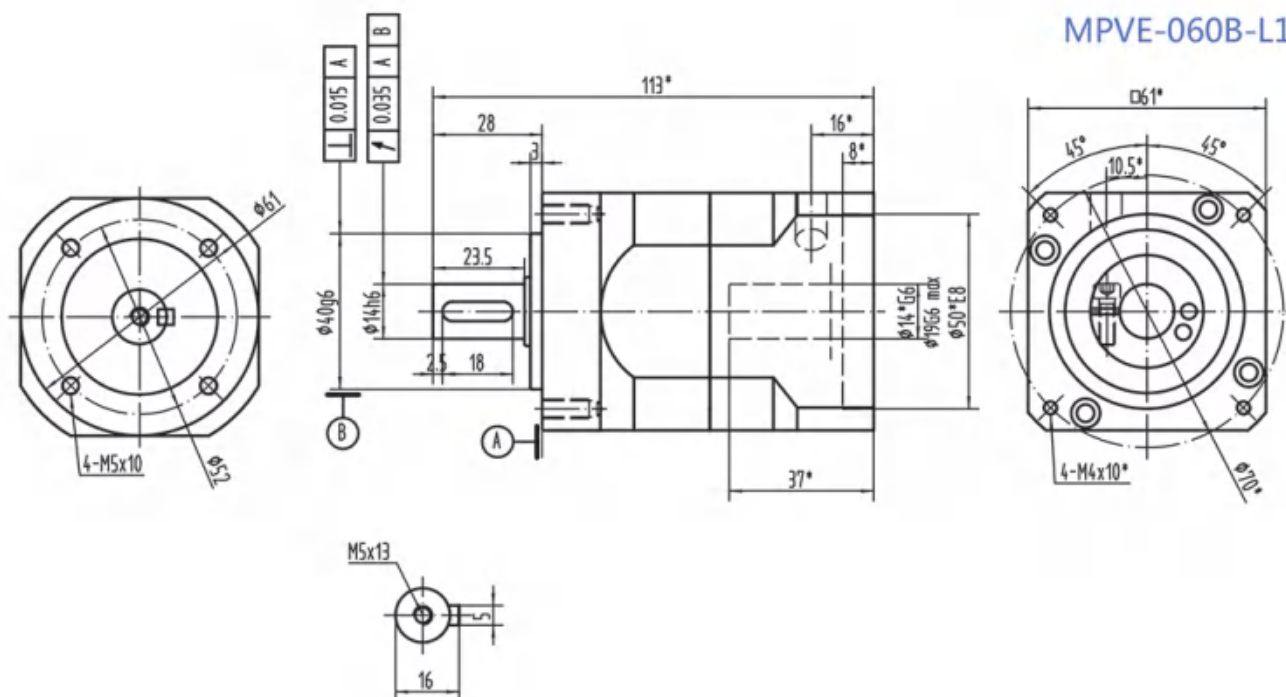


MPVE-060B-L2

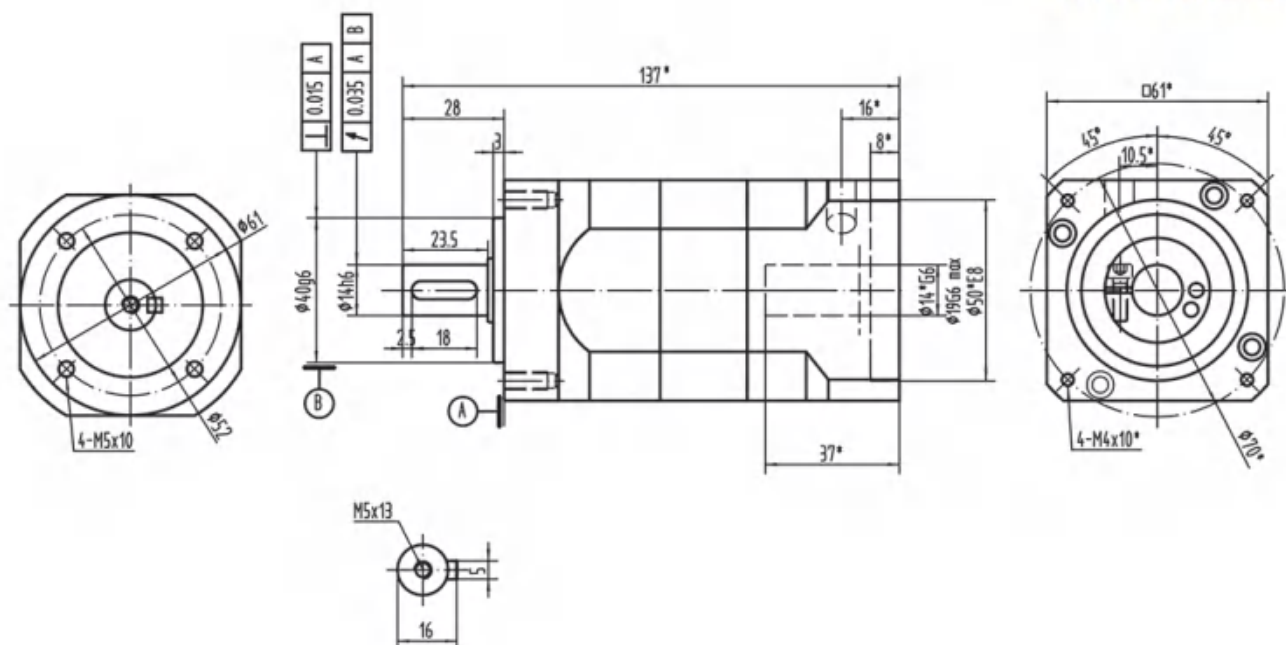


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MPVE-090A-L1

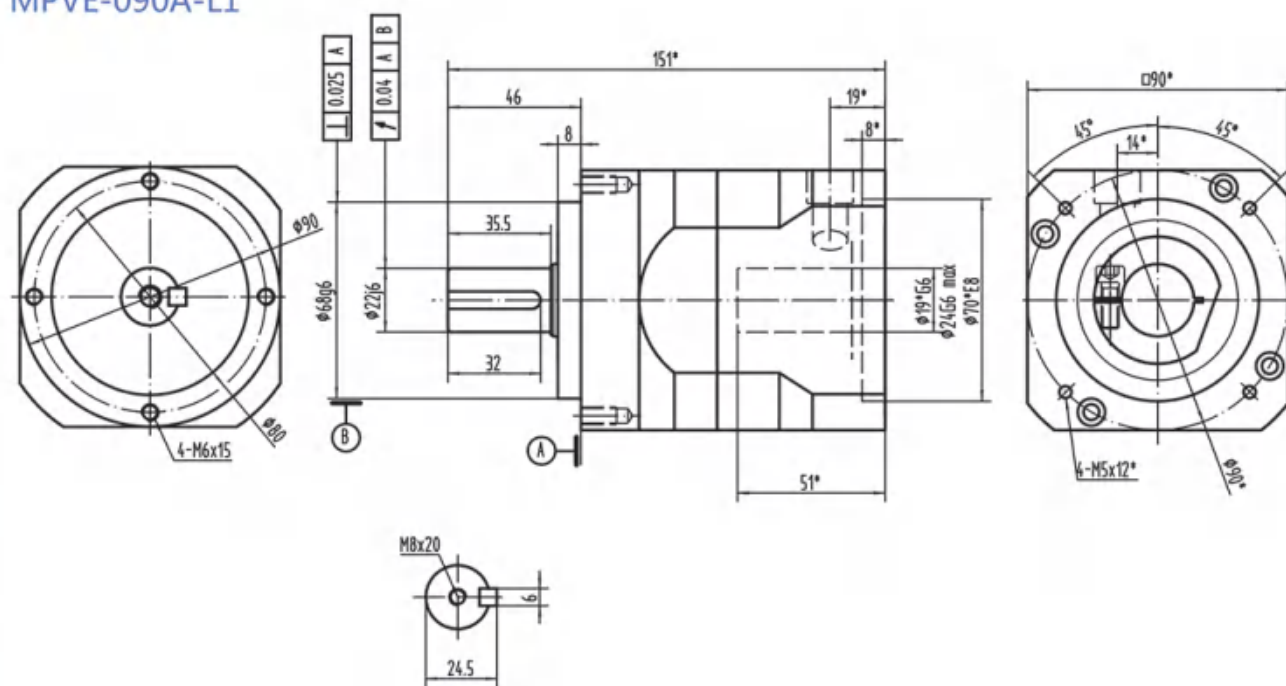


MPVE-090A-L2

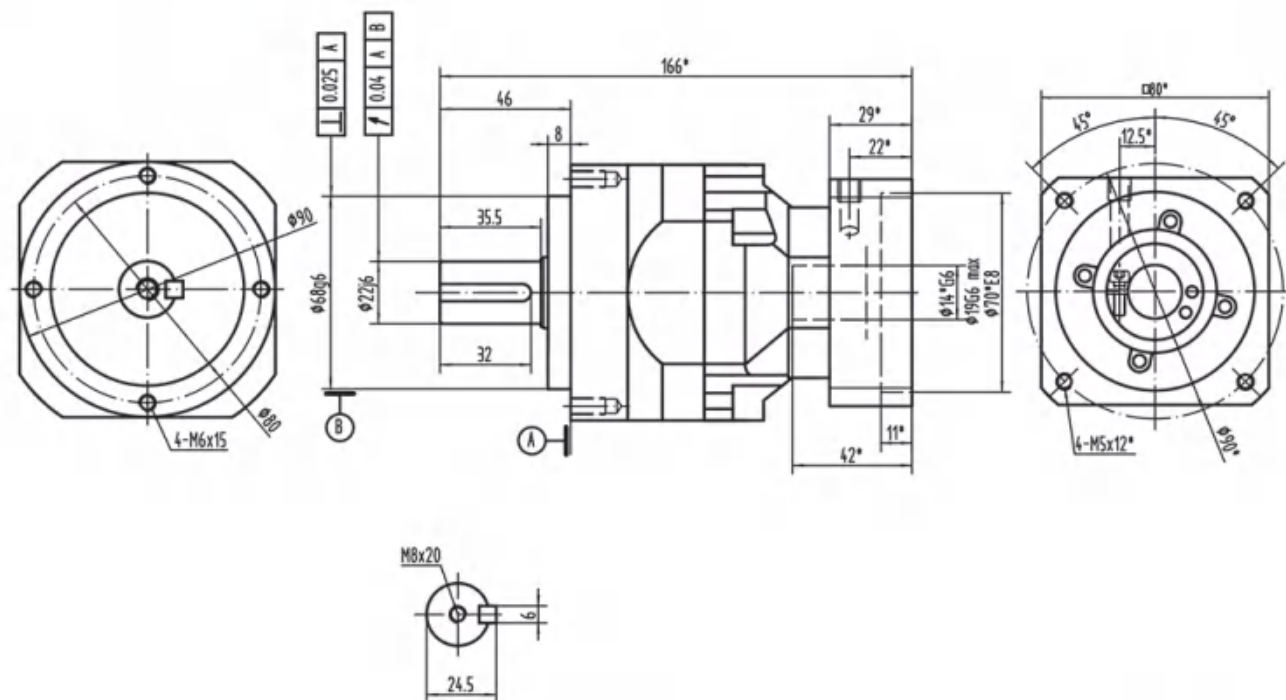

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MPVE-090B-L1

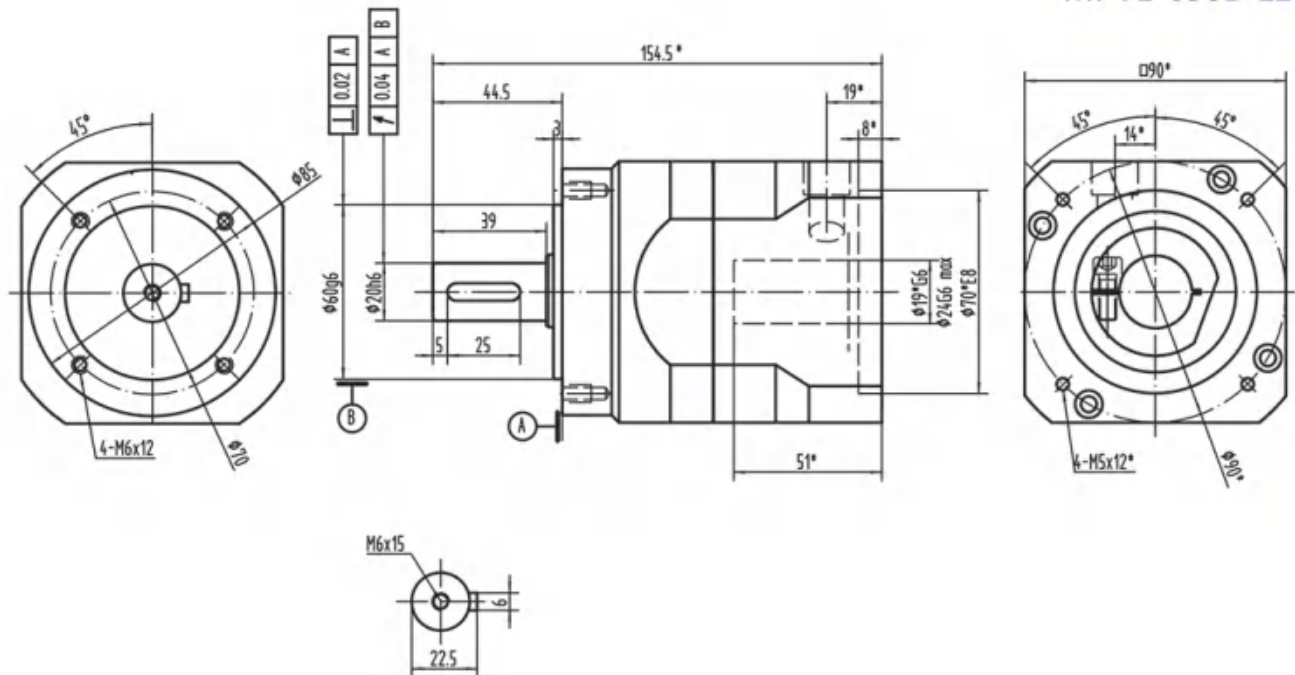

MPVE


MPVE-090B-L2

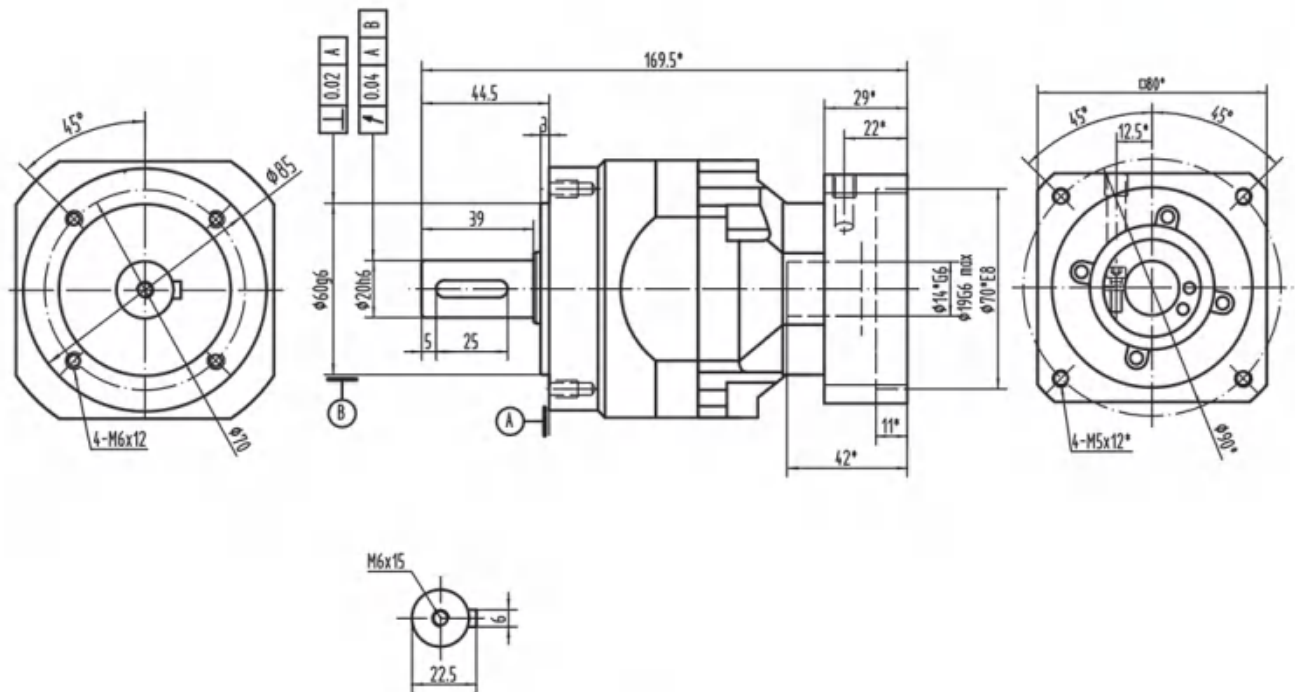


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MPVE-115A-L1

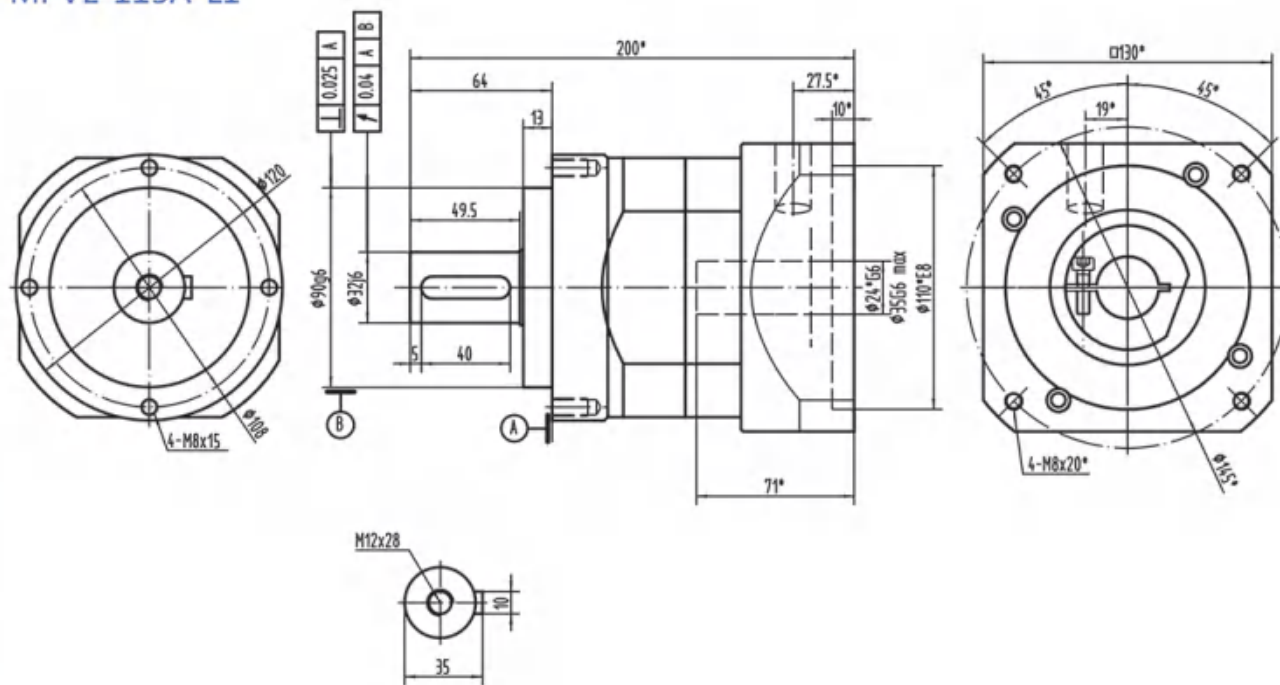


MPVE-115A-L2

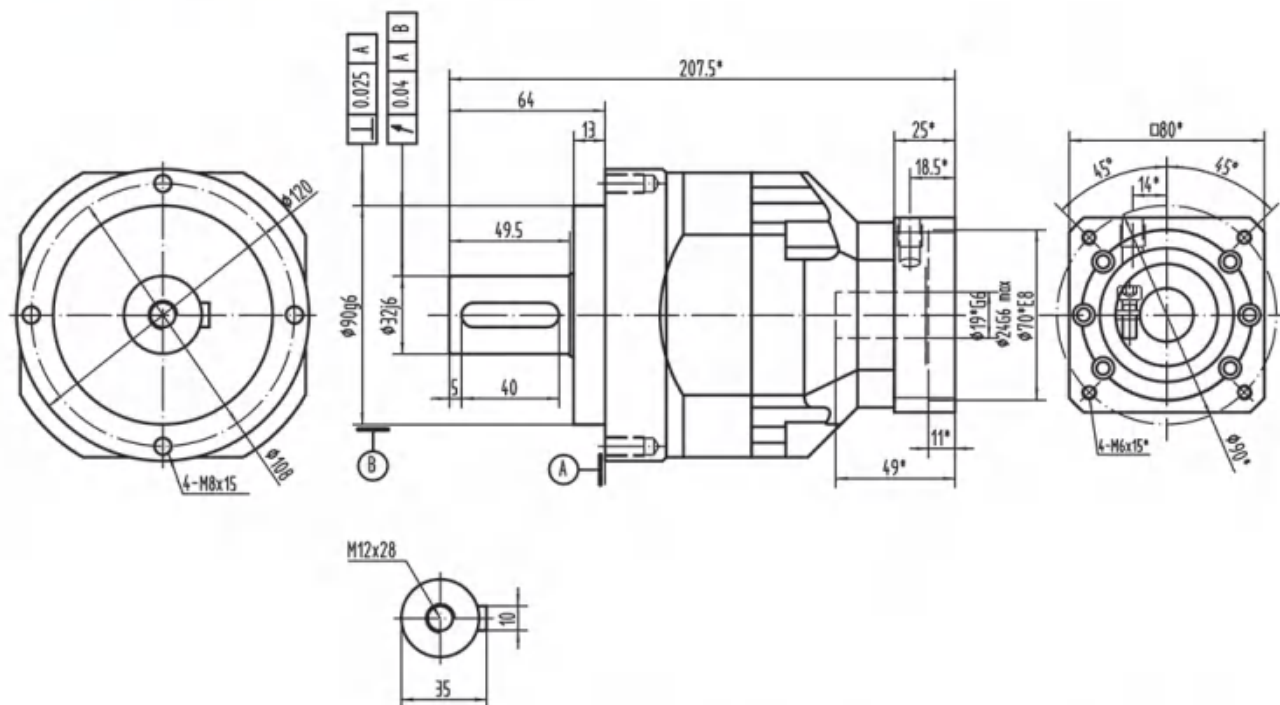


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MPVE-115B-L1

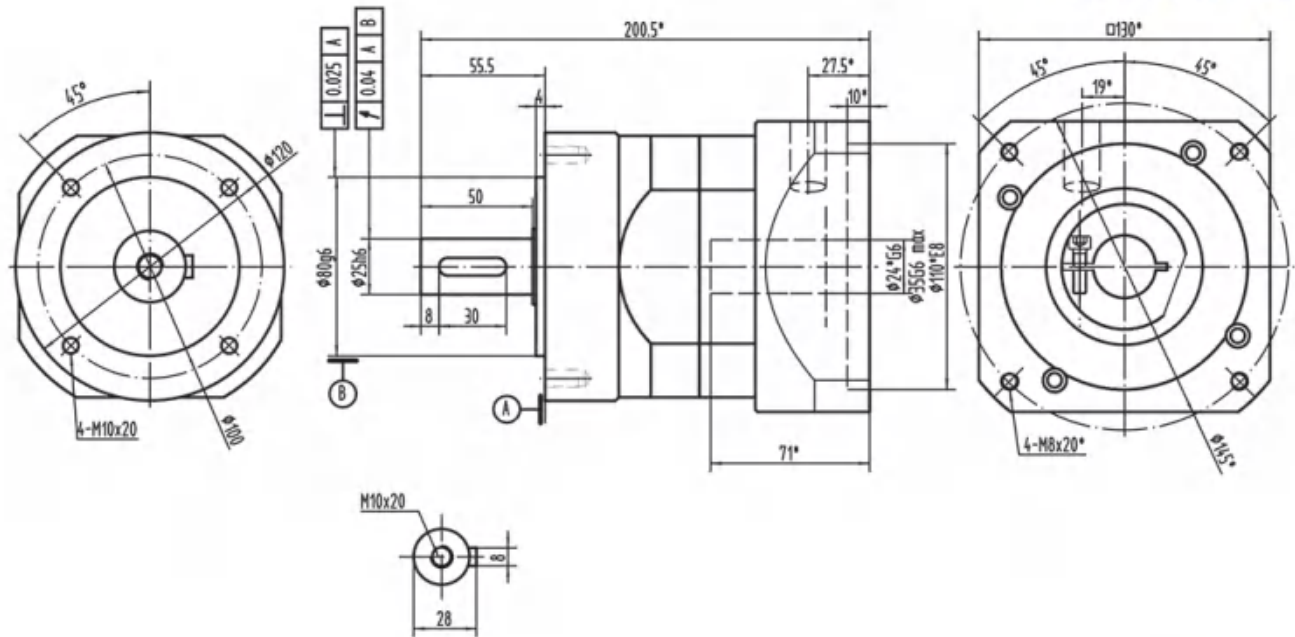

MPVE-115B-L2

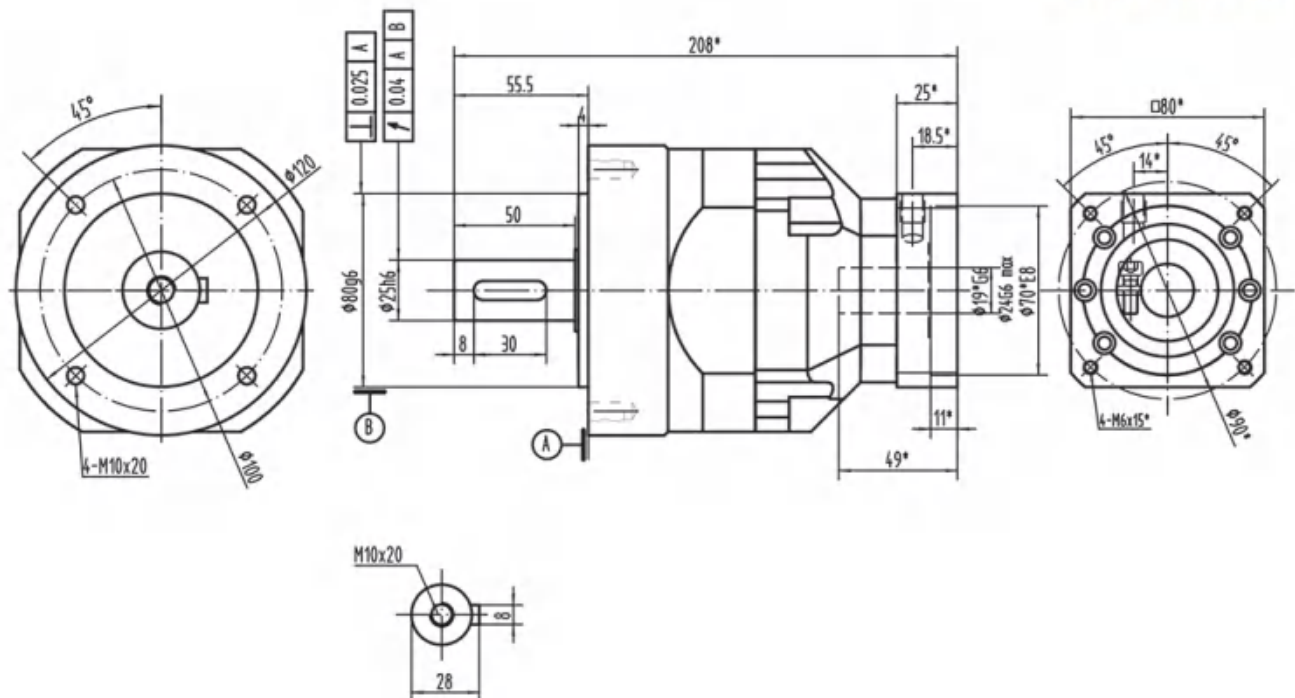

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MPVE-060																	
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	J ₁ arcmin	C _{2t} Nm/arcmin	F _{2RM} N	F _{2AM} N	J ₂ kgcm ²	η %	L _h h	T °C	Lub	PC	MP	dB
I STAGE	3	25	2×T _{2N}	3000	6000	≤3	7	1200	1050	0.16	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤67
	4	40					7			0.14							
	5	40					7			0.13							
	6	40					7			0.13							
	7	40					7			0.13							
	8	40					7			0.13							
	9	25					7			0.13							
	10	25					7			0.13							
II STAGE	15	35				≤5	7			0.13	≥90						
	20	50					7			0.13							
	35	50					7			0.13							
	40	50					7			0.13							
	50	50					7			0.13							
	80	50					7			0.13							
	100	35					7			0.13							

MPVE-090																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2RMMax}	F _{2AMMax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	80	2×T _{2N}	3000	6000	≤3	14	2450	2200	0.61	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤68
	4	120					14			0.48							
	5	125					14			0.47							
	6	125					14			0.47							
	7	125					14			0.45							
	8	125					14			0.45							
	9	80					14			0.42							
	10	80					14			0.4							
II STAGE	15	80				≤5	14			0.13	≥90						
	20	125					14			0.13							
	35	125					14			0.13							
	40	125					14			0.13							
	50	125					14			0.13							
	80	125					14			0.13							
	100	80					14			0.13							

Performance table


MPVE-115																	
Symb. Unit	i	T _{2N} N _m	T _{2Net} N _m	n _{1N} rpm	n _{1Max} rpm	j _t arcmin	C _{2t} Nm/arcmin	F _{2RMMax} N	F _{2MMMax} N	J _t kgcm ²	η %	L _h h	T °C	Lub	PC	MP	dB
I STAGE	3	160	2×T _{2N}	3000	6000	≤3	25	4400	4000	3.25	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤70
	4	220					25			2.74							
	5	260					25			2.71							
	6	260					25			2.71							
	7	260					25			2.62							
	8	260					25			2.6							
	9	160					25			2.59							
	10	160					25			2.57							
II STAGE	15	220				≤5	25			0.45	≥90						
	20	300					25			0.45							
	35	350					25			0.45							
	40	360					25			0.45							
	50	350					25			0.4							
	80	360					25			0.4							
	100	220					25			0.4							

MAB SERIES



MAB系列是一款在中等精度领域中性价比最高的机型。

MAB series is one of the most cost-effective models in the field of medium precision.

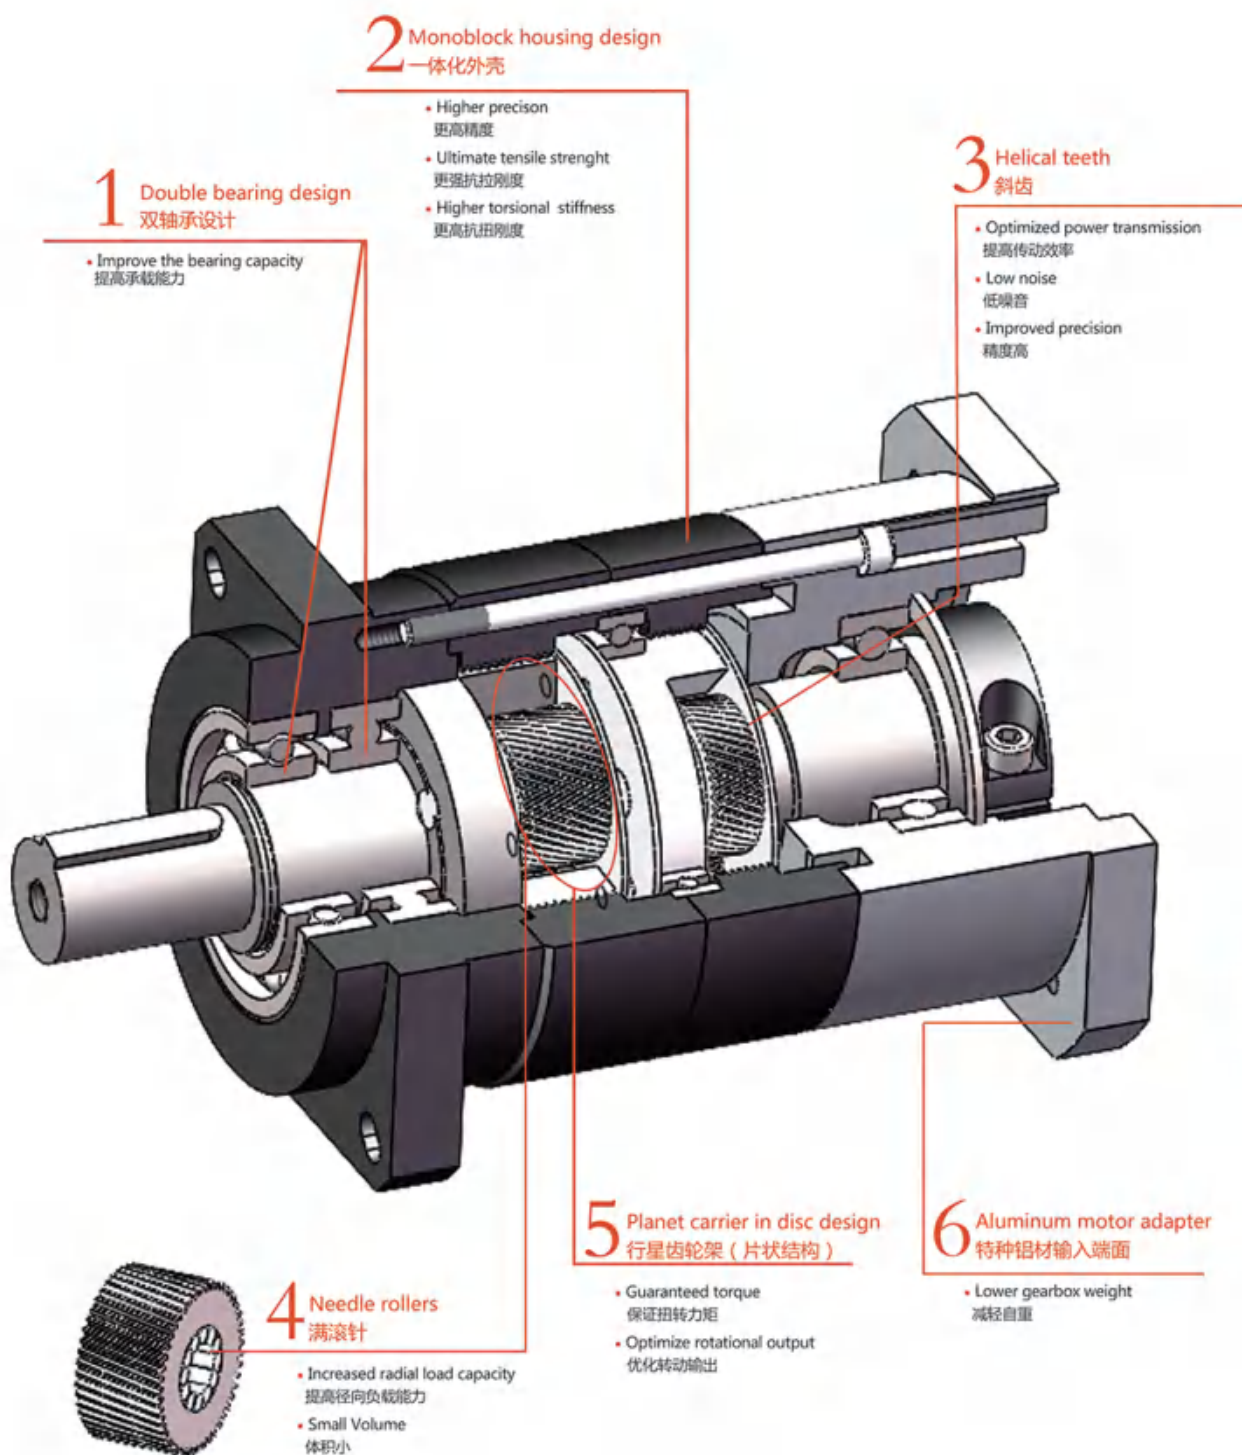

MAB

造型数据:


Selection data:

扭矩 (Nm)	7-1200
速比	3-100
背隙 (arcmin)	3-5
最大工作温度 (°C)	90
噪音 (dB)	65~77


Nominal output torque (Nm)	7-1200
Reduction ratio	3-100
Backlash (arcmin)	3-5
Max.working temperature (°C)	90
Noise (dB)	65~77

Drawing / Size

MAB-060-L1

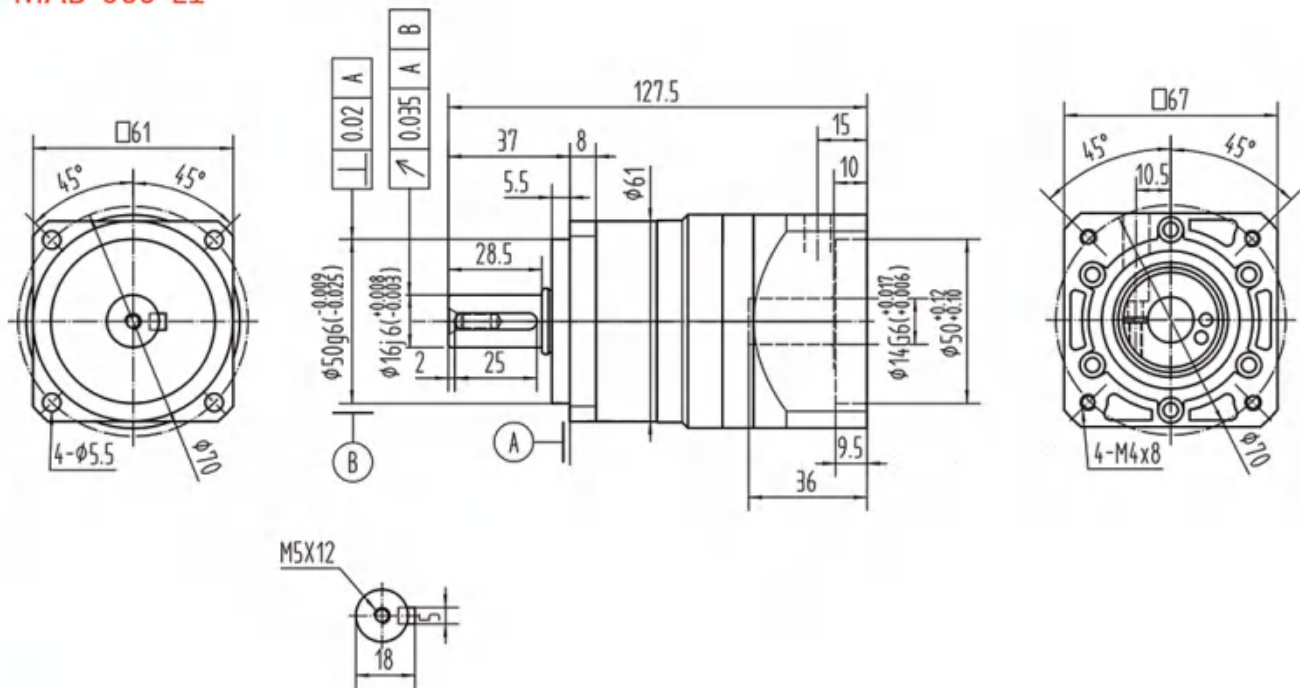


MAB-060-L2

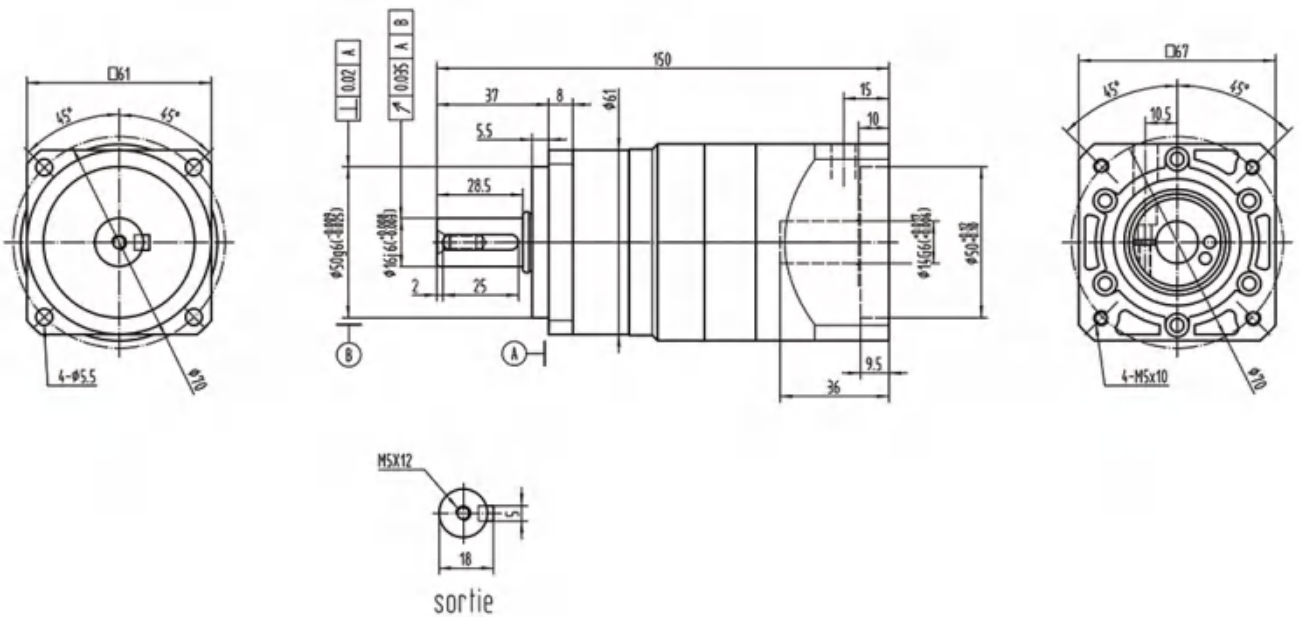

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MAB-090-L1

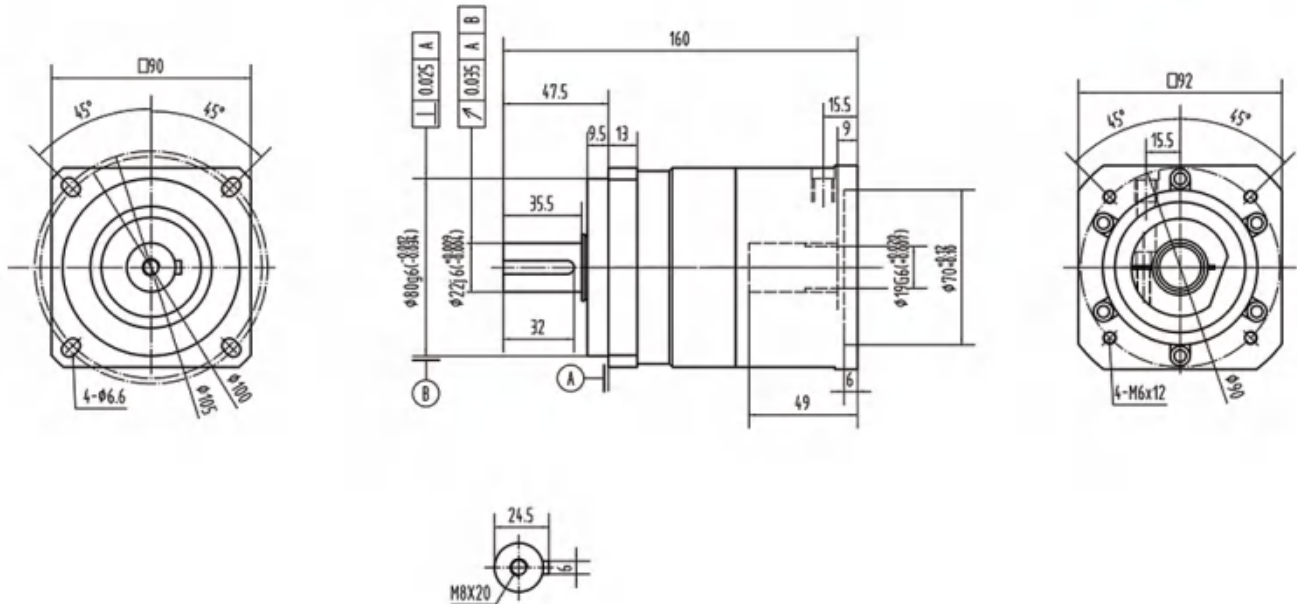

MAB


MAB-090-L2

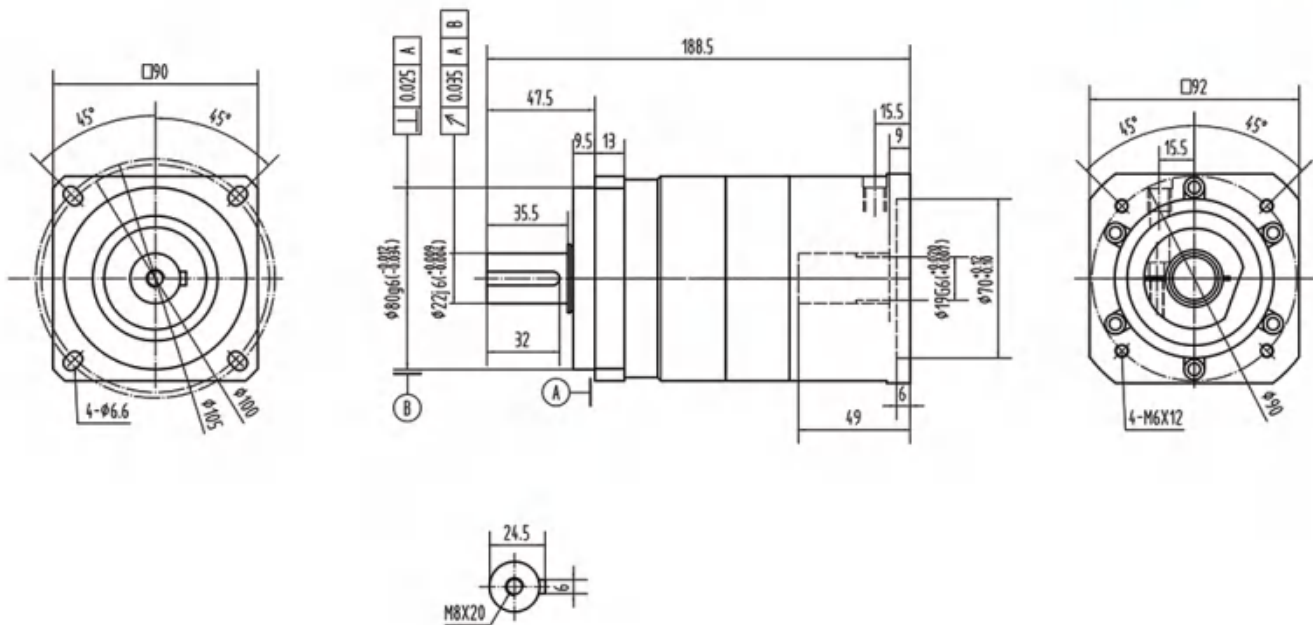

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MAB-115A-L1

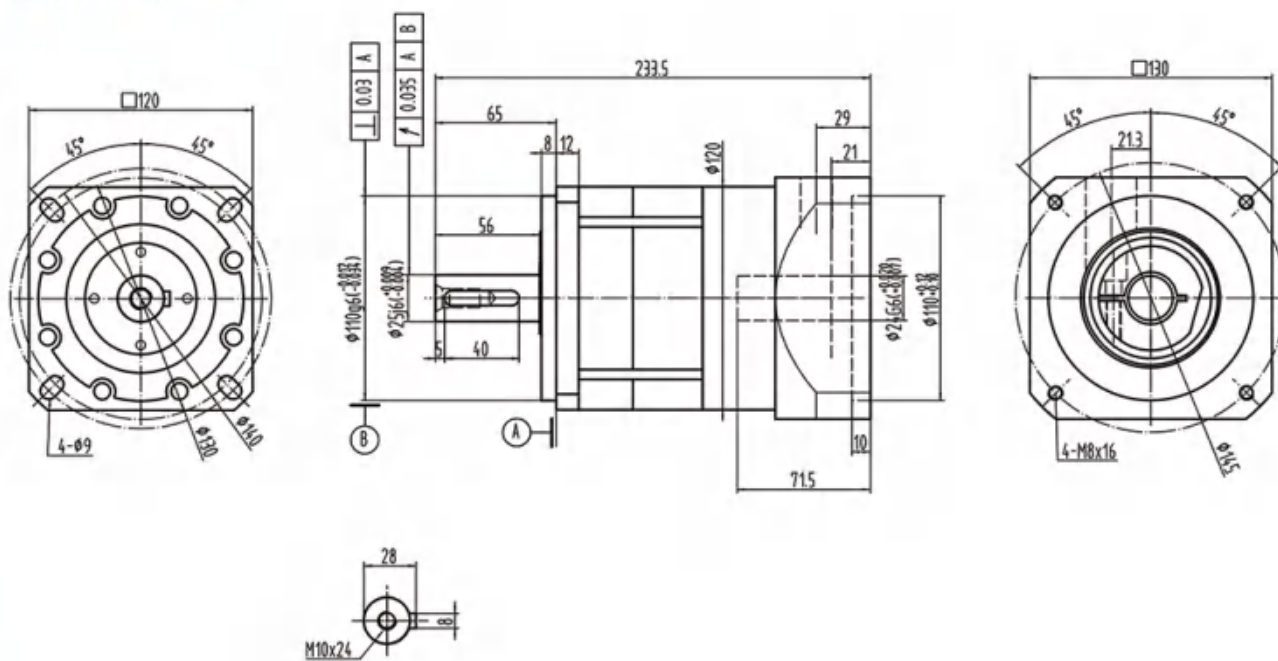

MAB


MAB-115A-L2

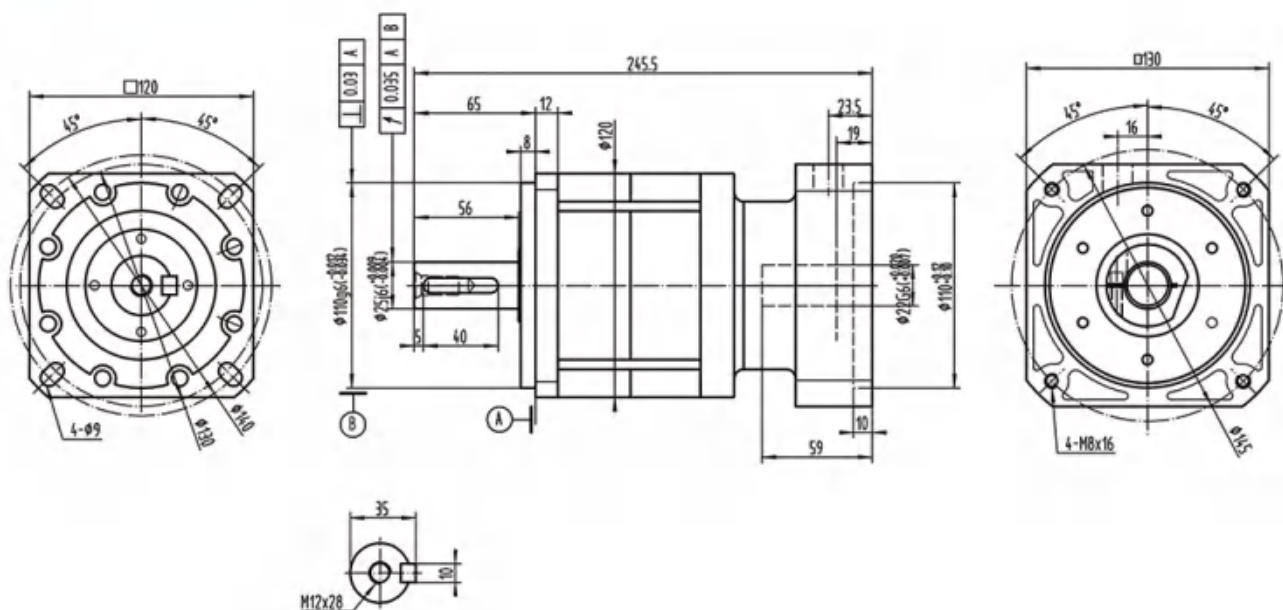


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAB-115B-L1

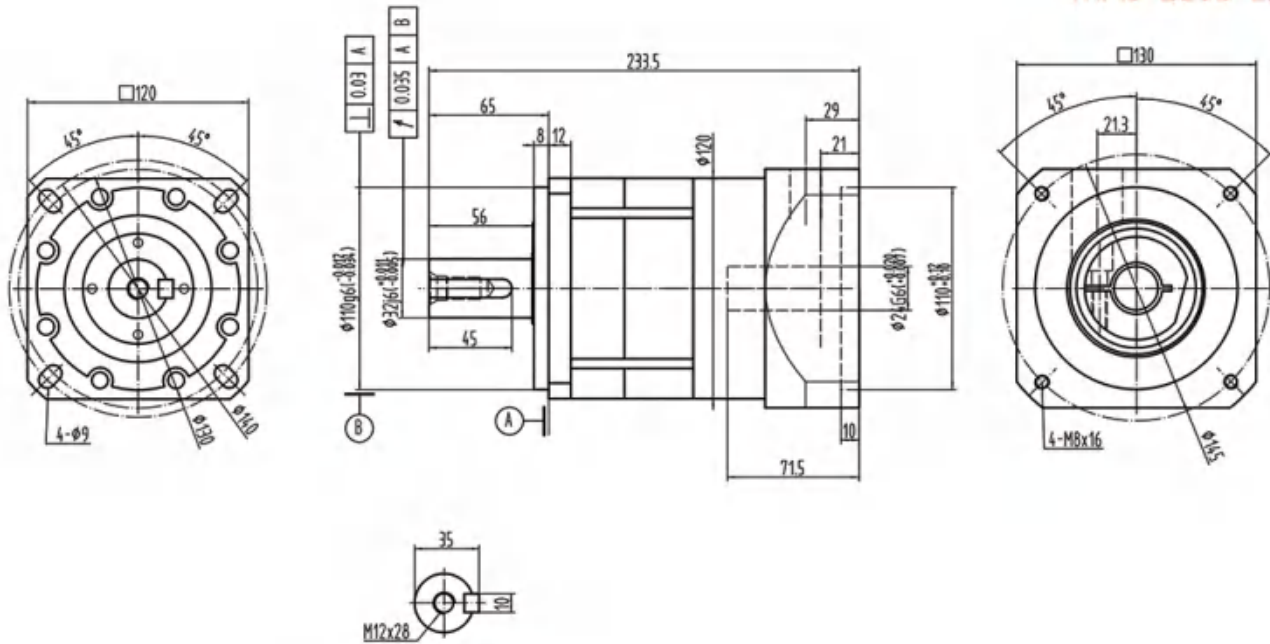


MAB-115B-L2

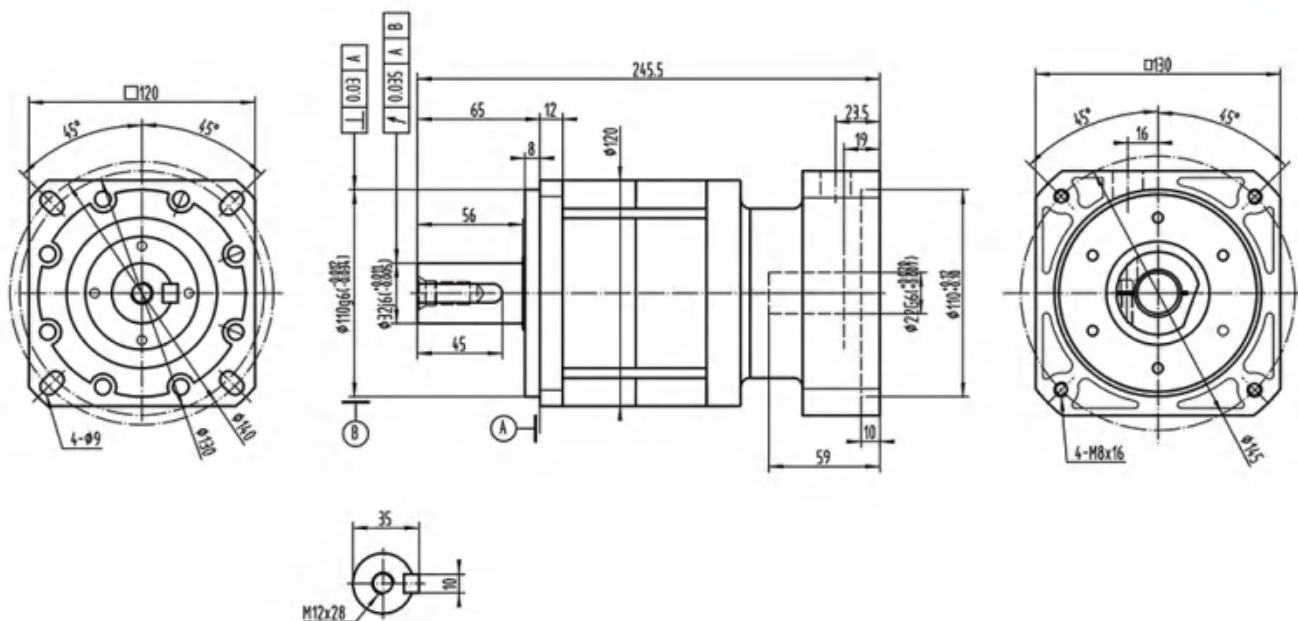

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

MAB-140-L1

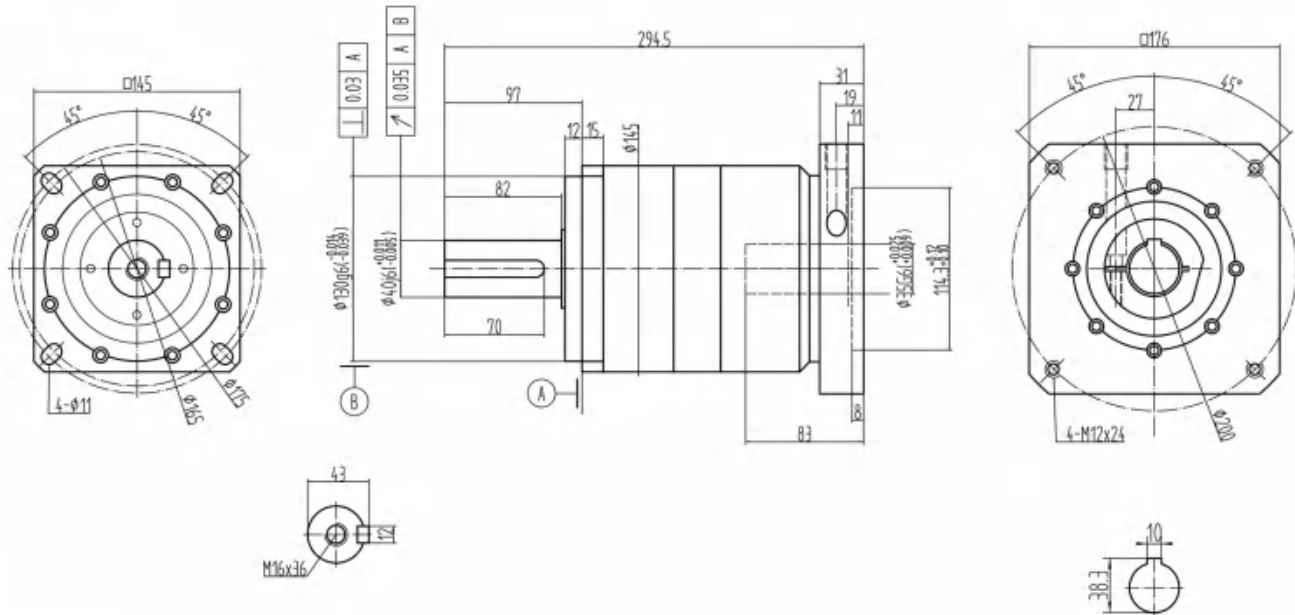

MAB


MAB-140-L2

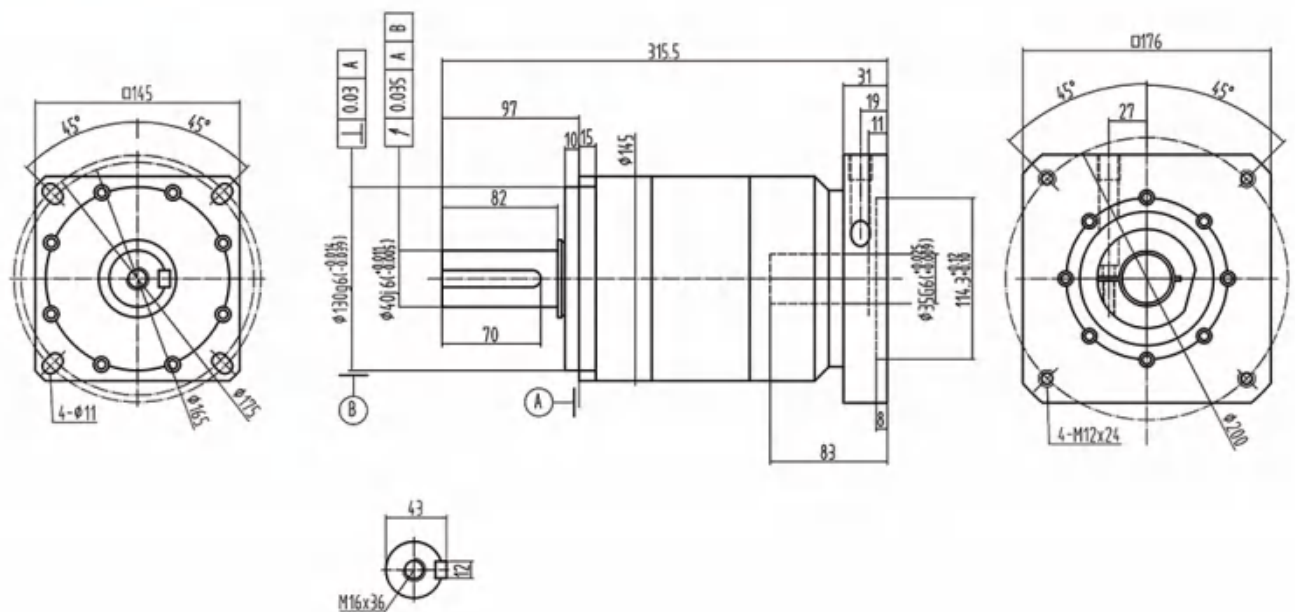

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAB-140-L2-R

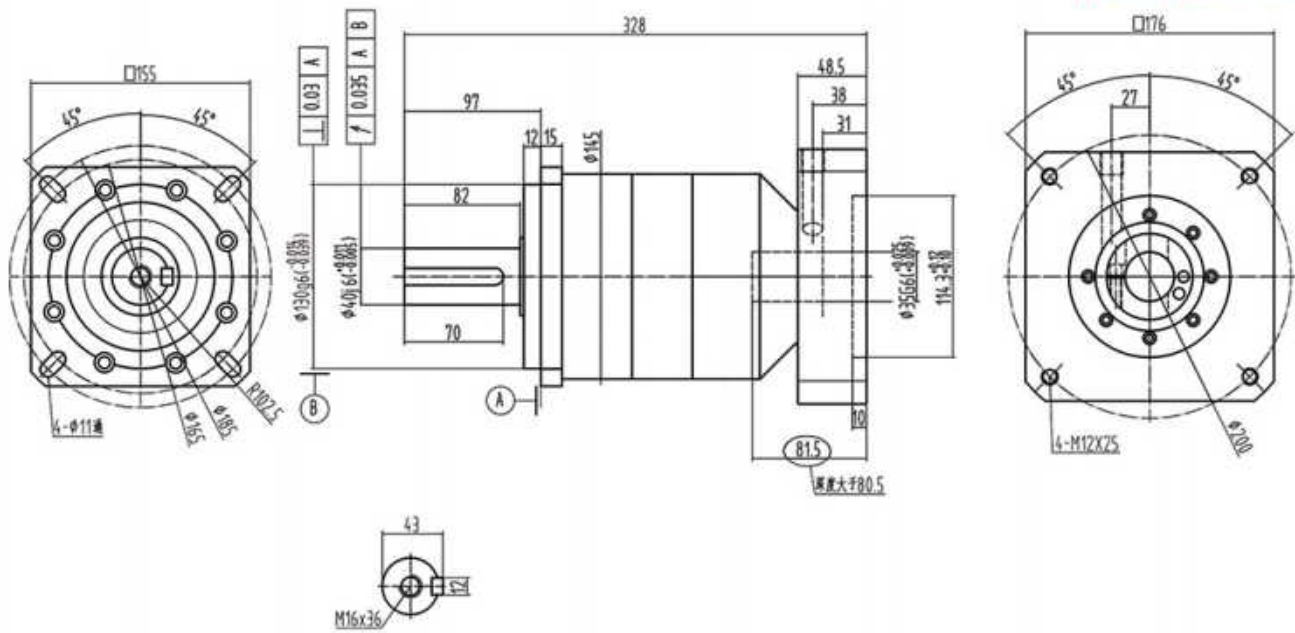

MAB

*Dimensions based on servo-motor, please contact us for custom made order.
注有*尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MAB-060																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j _t	C _{2t}	F _{20Max}	F _{2AMax}	j _t	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	N _m /mm ²	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	25								0.16							
	4	40								0.14							
	5	40								0.13							
	6	40				≤3				0.13	≥95						
	7	40								0.13							
	8	35								0.13							
	9	25								0.13							
	10	25								0.13							
II STAGE	15	25	2×T _{2n}	4000	8000		7	1060	430	0.13		> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77
	16	40								0.13							
	20	40								0.13							
	35	40								0.13							
	40	40				≤5				0.13	≥90						
	50	35								0.13							
	70	35								0.13							
	80	35								0.13							
	100	25								0.13							

MAB

MAB-090																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j _t	C _{2t}	F _{20Max}	F _{2AMax}	j _t	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	N _m /mm ²	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	70								0.61							
	4	100								0.48							
	5	100								0.47							
	6	100				≤3				0.47	≥95						
	7	100								0.45							
	8	100								0.45							
	9	70								0.42							
	10	70								0.40							
II STAGE	15	70	2×T _{2n}	3000	6000		14	1960	2200	0.45		> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77
	16	100								0.45							
	20	100								0.45							
	35	100								0.45							
	40	100				≤5				0.45	≥90						
	50	100								0.40							
	70	100								0.40							
	80	100								0.40							
	100	70								0.40							

Performance table

MAB-115																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2BMax}	F _{2AMax}	J _t	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	mm/mm	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	180	2×T _{2N}	3000	6000	≤3	25	4000	3600	3.25	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77
	4	240								2.74							
	5	300								2.71							
	6	300								2.71							
	7	300								2.62							
	8	300								2.60							
	9	180								2.59							
	10	180								2.57							
II STAGE	15	180				0.45				≥90							
	16	240				0.45											
	20	240	0.45														
	35	300	0.45														
	40	300	0.45														
	50	300	0.40														
	70	300	0.40														
	80	300	0.40														
	100	180	0.40														

MAB


MAB-140																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2BMax}	F _{2AMax}	J _t	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	mm/mm	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	380	2×T _{2n}	3000	6000	≤3	50	8500	7400	9.21	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77
	4	520								7.54							
	5	600								7.42							
	6	600								7.42							
	7	600								7.14							
	8	600								7.14							
	9	380								7.08							
	10	380								7.03							
II STAGE	15	380				2.63				≥90							
	16	520				2.63											
	20	520	2.43														
	35	600	2.43														
	40	600	2.43														
	50	600	2.39														
	70	600	2.39														
	80	600	2.39														
	100	380	2.39														

MAE SERIES



MAE系列是一款在中等精度领域中性价比最高的机型。

MAE series is one of the most cost-effective models in the field of medium precision.

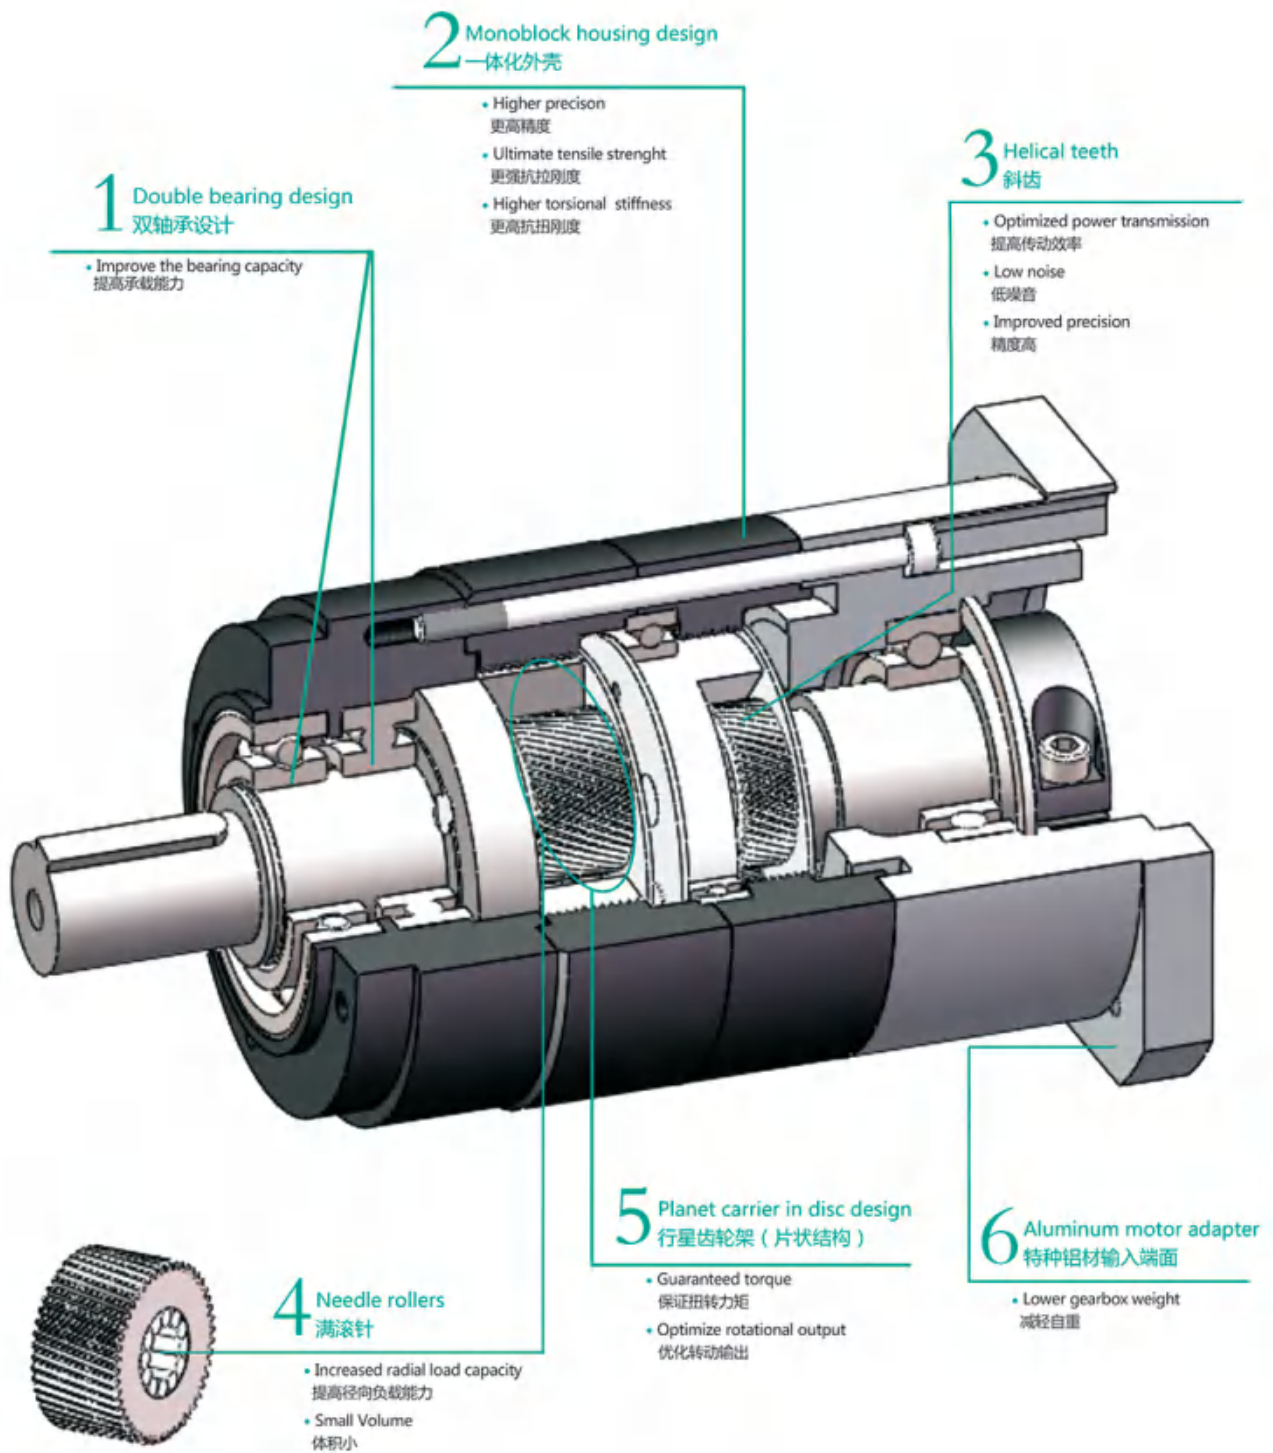

造型数据:


Selection data:

扭矩 (Nm)	7-1200
速比	3-100
背隙 (arcmin)	3-5
最大工作温度 (°C)	90
噪音 (dB)	65~77


Nominal output torque (Nm)	7-1200
Reduction ratio	3-100
Backlash (arcmin)	3-5
Max.working temperature (°C)	90
Noise (dB)	65~77

Drawing / Size

MAE-060-L1

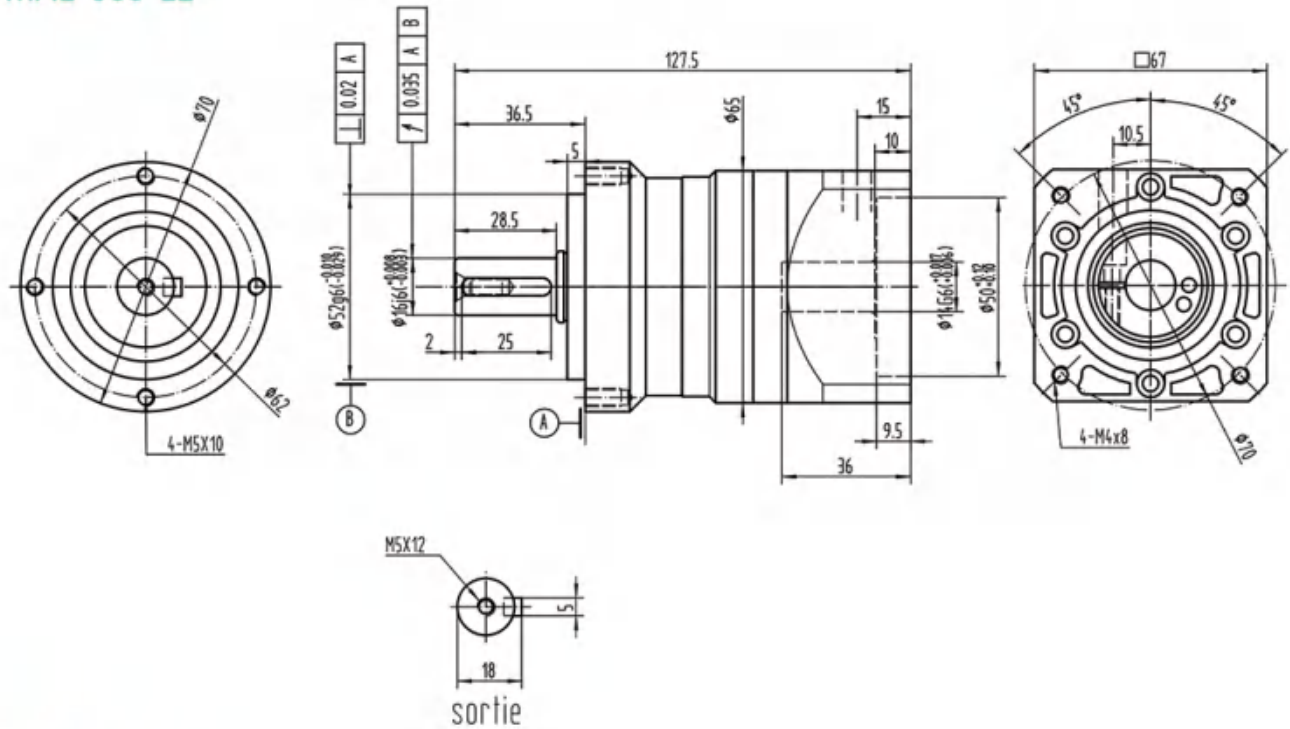


MAE-060-L2

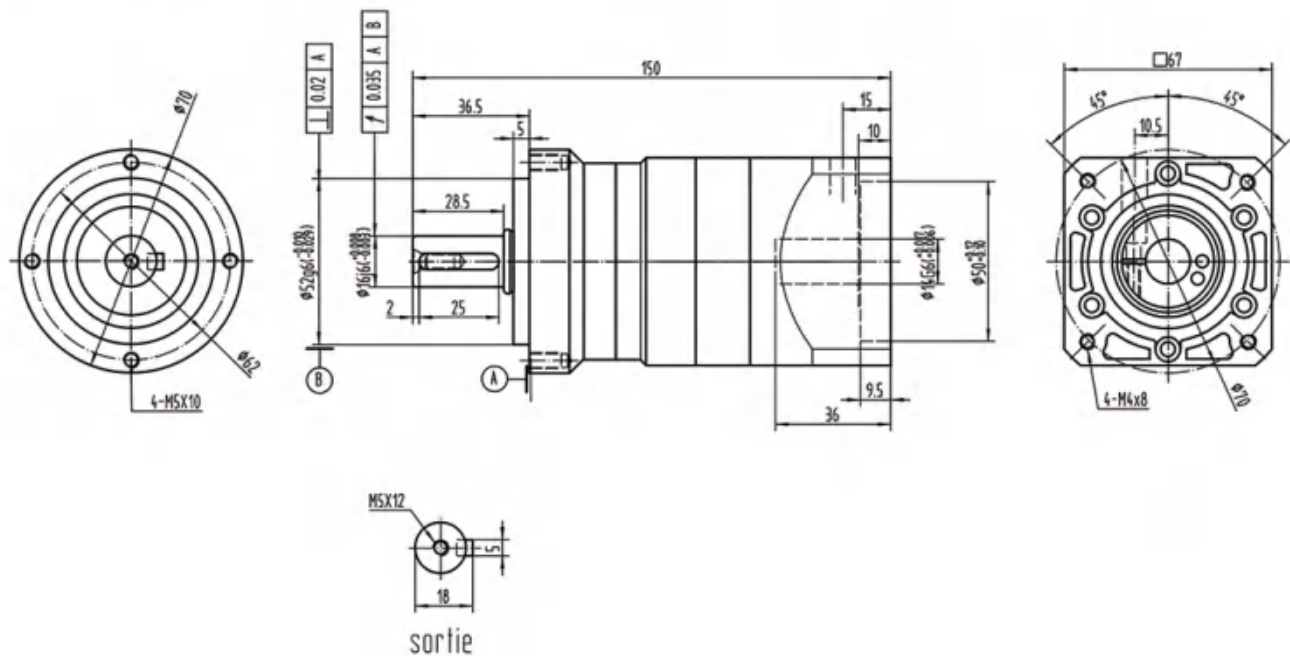


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAE-090-L1

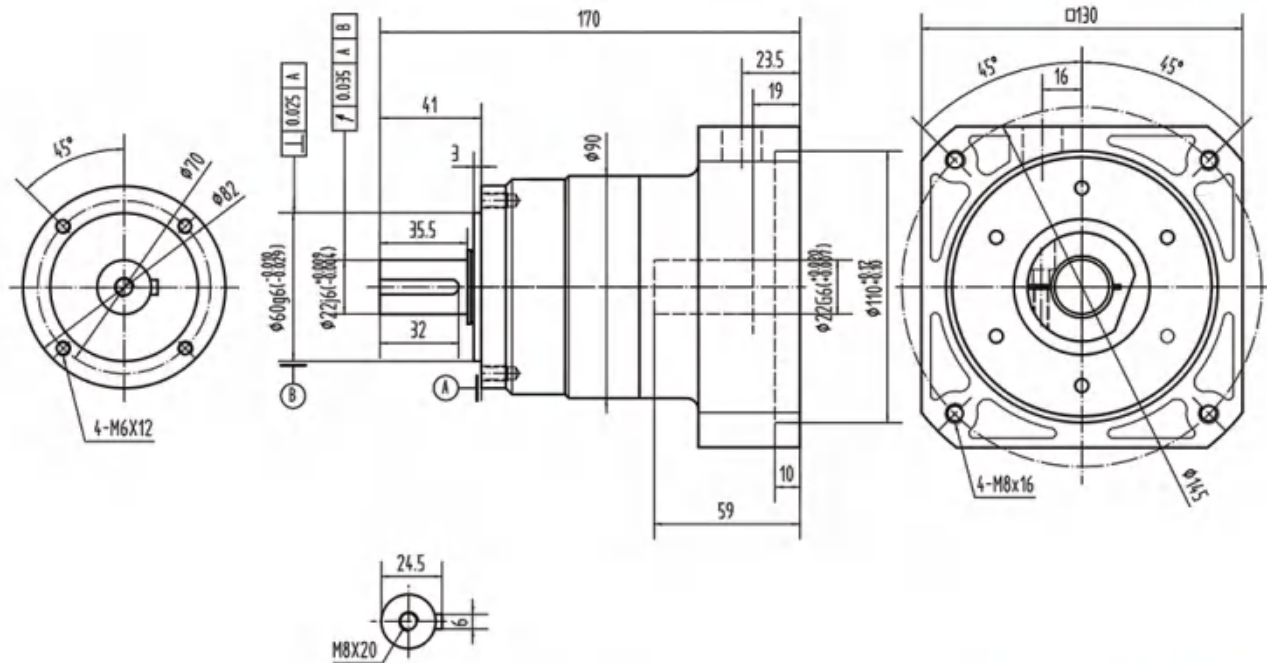


MAE-090-L2

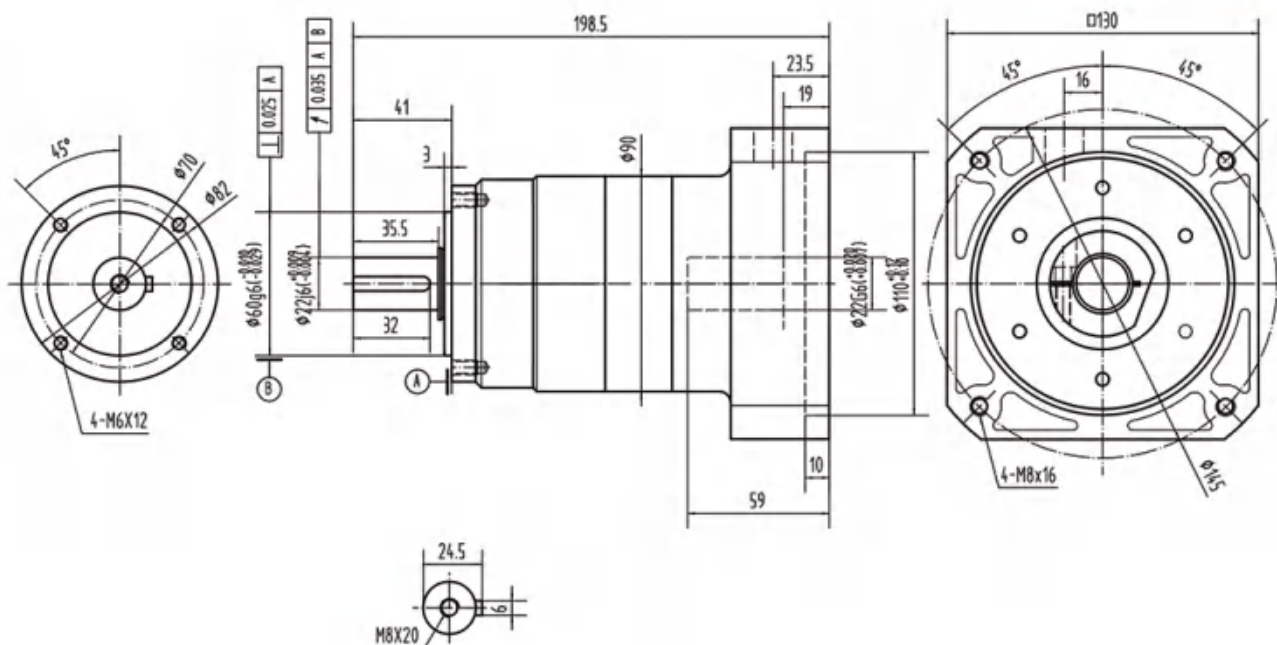


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAE-155-L1

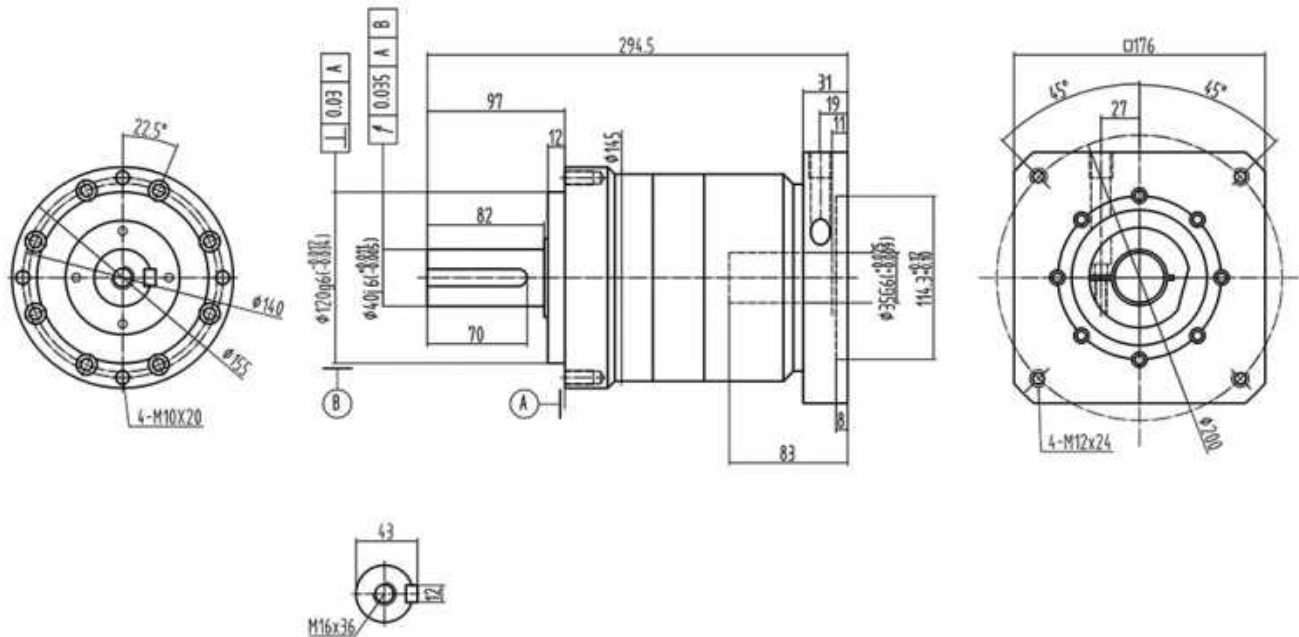


MAE-155-L2

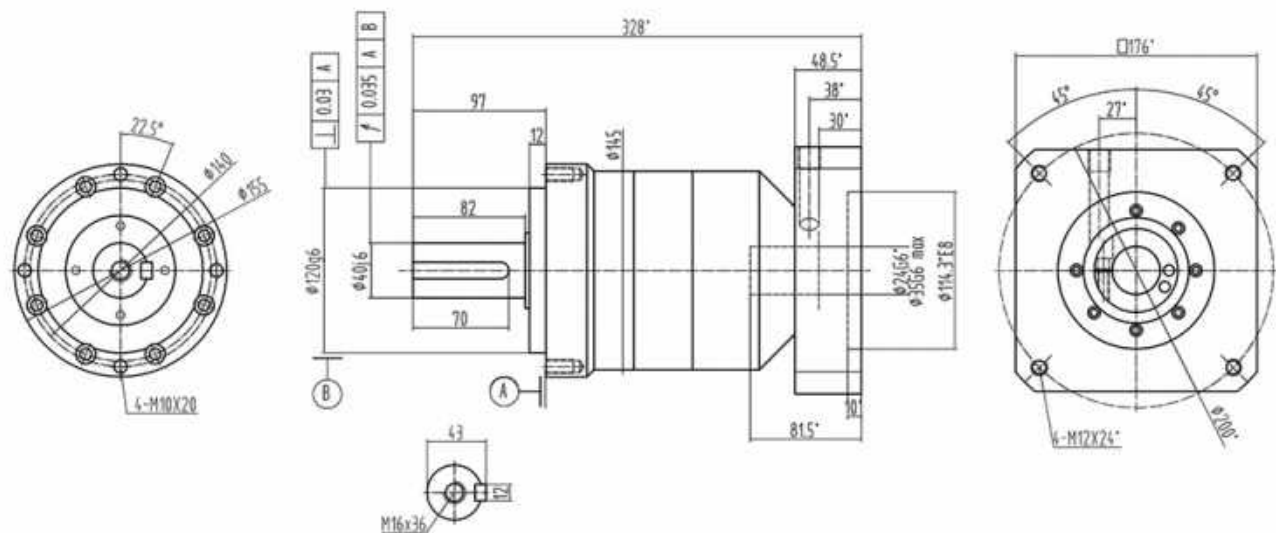

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAE-155-L2-P

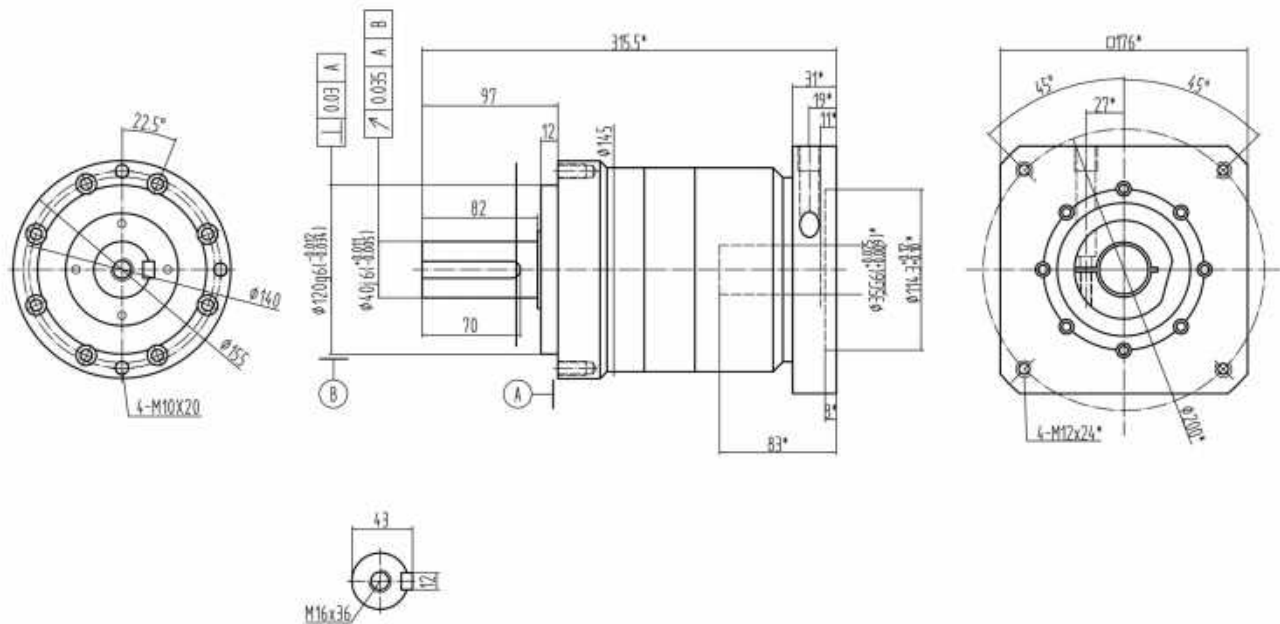

*Dimensions based on servo-motor, please contact us for custom made order.
注有*尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MAE-060																										
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2RMMax}	F _{2AMMax}	J _t	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	mm/arcmin	N	N	kgcm ²	%	h	°C				dB									
I STAGE	3	25	2×T _{2n}	4000	8000	≤3	7	1060	430	0.16	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77									
	4	40								0.14																
	5	40								0.13																
	6	40								0.13																
	7	40								0.13																
	8	35								0.13																
	9	25								0.13																
	10	25								0.13																
II STAGE	15	25				≤5				0.13	≥90															
	16	40								0.13																
	20	40								0.13																
	35	40								0.13																
	40	40								0.13																
	50	35								0.13																
	70	35								0.13																
	80	35								0.13																
	100	25								0.13																

MAE

MAE-090																										
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2NMax}	F _{2AMax}	J _t	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	mm/lmm	N	N	kgcm ²	%	h	°C				dB									
I STAGE	3	70	2×T _{2n}	3000	6000	≤3	14	1960	2200	0.61	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77									
	4	100								0.48																
	5	100								0.47																
	6	100								0.47																
	7	100								0.45																
	8	100								0.45																
	9	70								0.42																
	10	70								0.40																
II STAGE	15	70				≤5				0.45	≥90															
	16	100								0.45																
	20	100								0.45																
	35	100								0.45																
	40	100								0.45																
	50	100								0.40																
	70	100								0.40																
	80	100								0.40																
	100	70								0.40																

Performance table


MAE-155																		
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	J _t	C _{2t}	F _{2tMax}	F _{2dMax}	J _t	η	L _h	T	Lub	PC	MP		
Unit		N _m	N _m	rpm	rpm	arcmin	mm/arcmin	N	N	kgcm ²	%	h	°C				dB	
I STAGE	3	380	2×T _{2N}	3000	6000	≤3	50	8500	7400	9.21	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤77	
	4	520								7.54								
	5	600								7.42								
	6	600								7.42								
	7	600								7.14								
	8	600								7.14								
	9	380								7.08								
	10	380								7.03								
	II STAGE	15				380				≤5	≥90							2.63
		16				520												2.63
20		520				2.43												
35		600				2.43												
40		600				2.43												
50		600				2.39												
70		600				2.39												
80		600				2.39												
100		380				2.39												

MVS SERIES



此经济款专用于较低技术要求应用。

Economic series dedicated to low challenging applications.

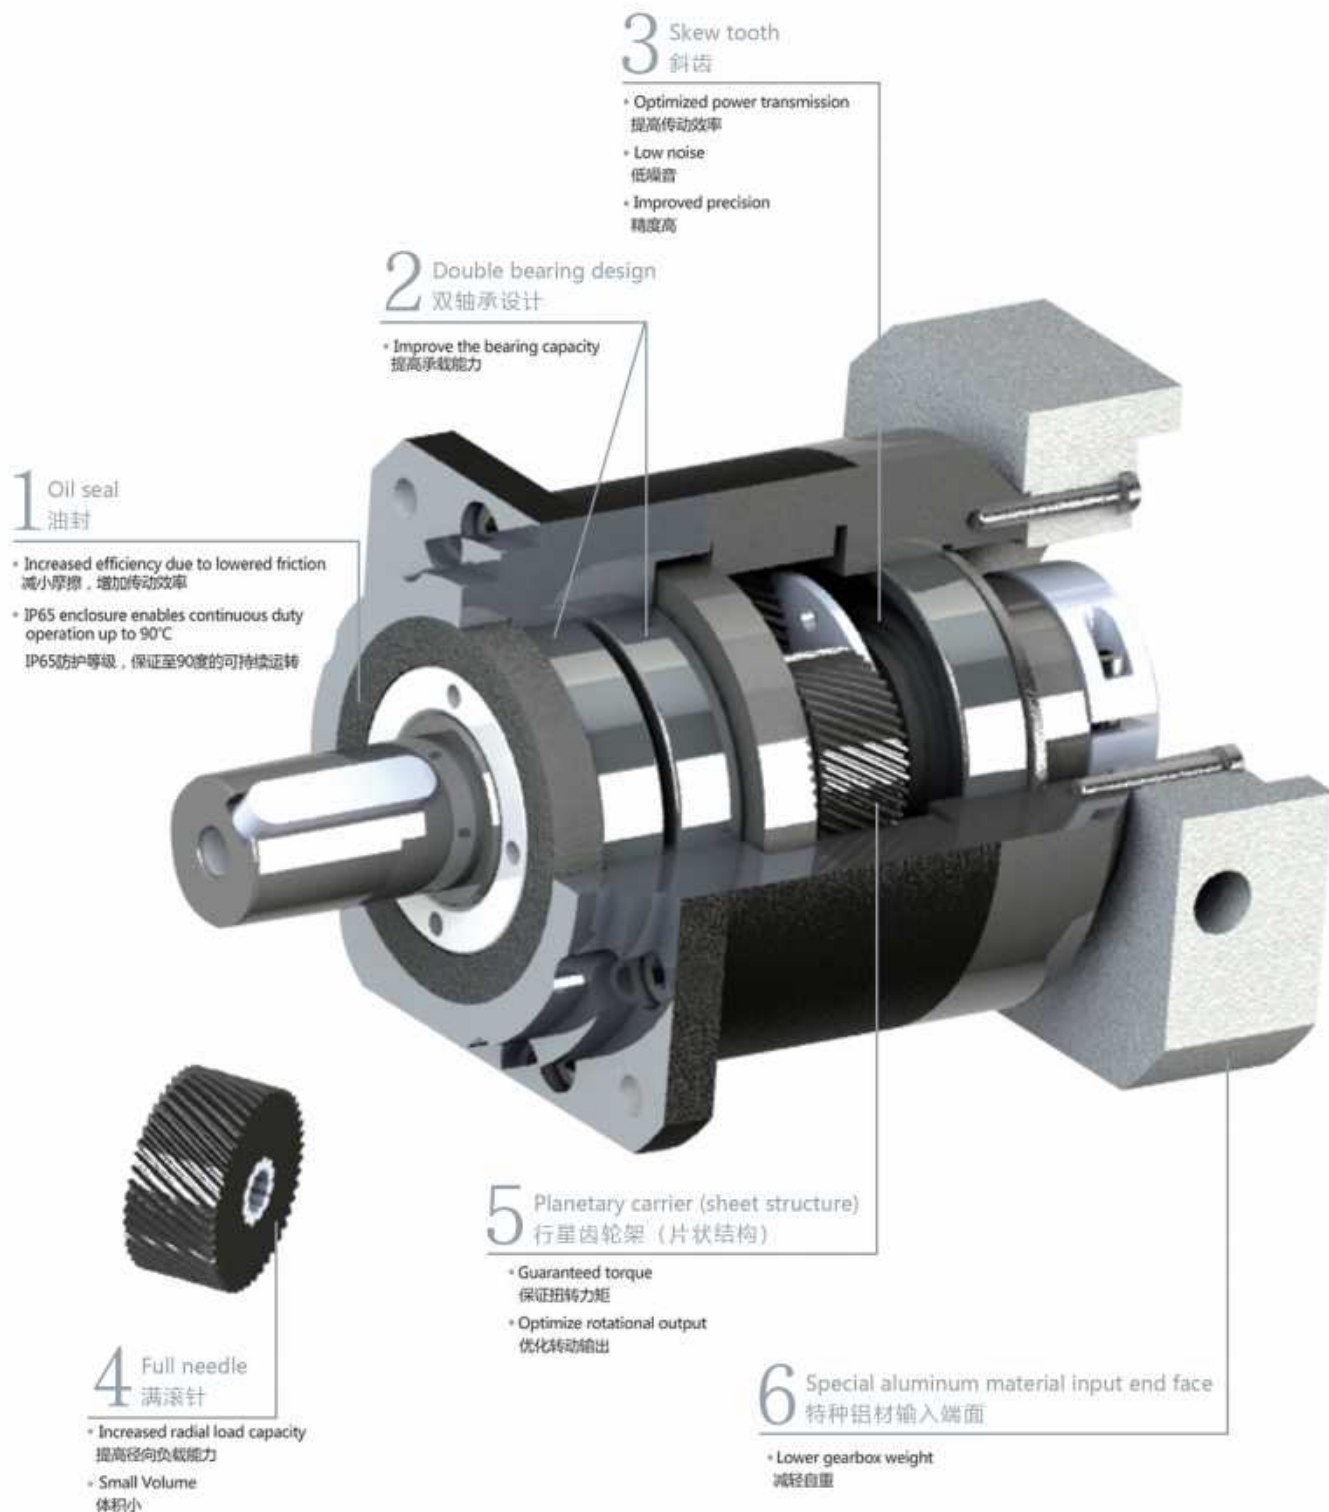

造型数据:


Selection data:

扭矩 (Nm)	5-330
速比	3-100
背隙 (arcmin)	≤12
最大工作温度 (°C)	90
噪音 (dB)	73-80


Nominal output torque (Nm)	5-330
Reduction ratio	3-100
Backlash (arcmin)	≤12
Max.working temperature (°C)	90
Noise (dB)	73-80

Drawing / Size

MVS-060-L1

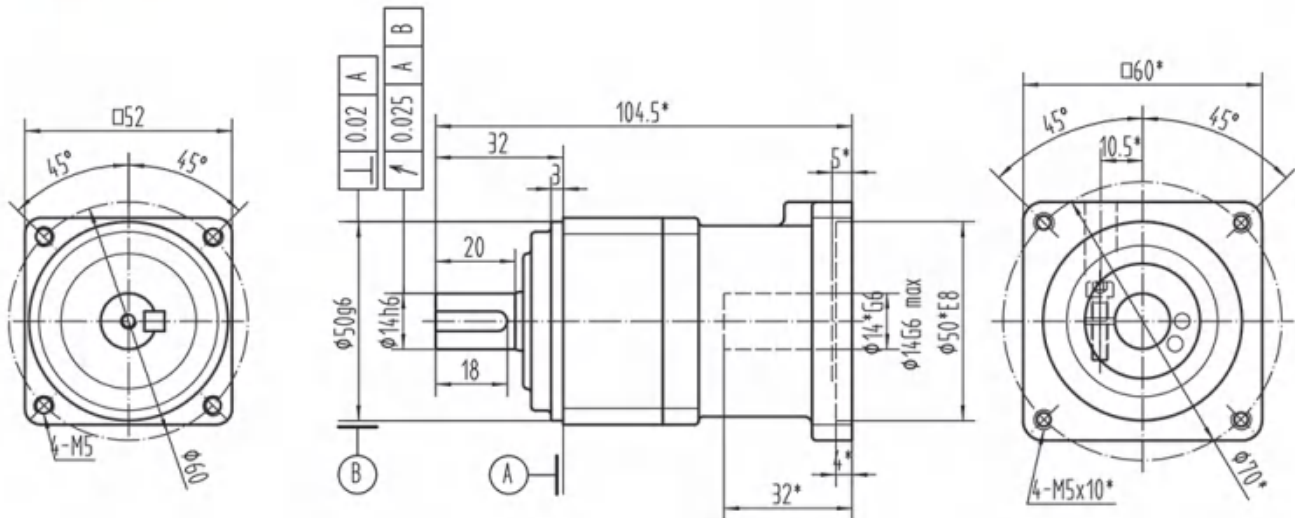


MVS-060-L2

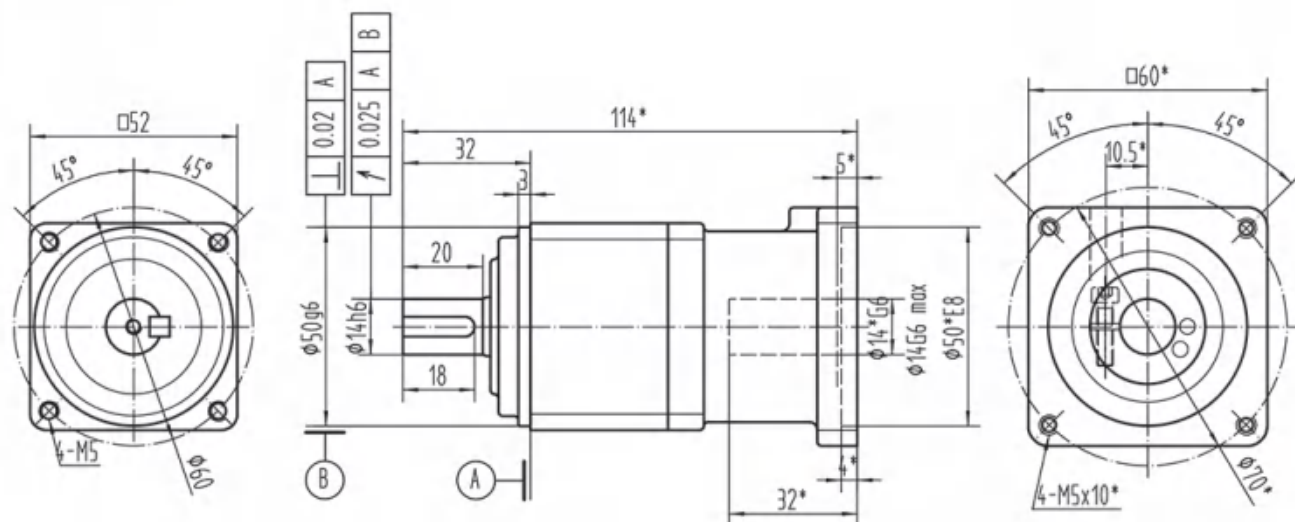


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVS-080-L1

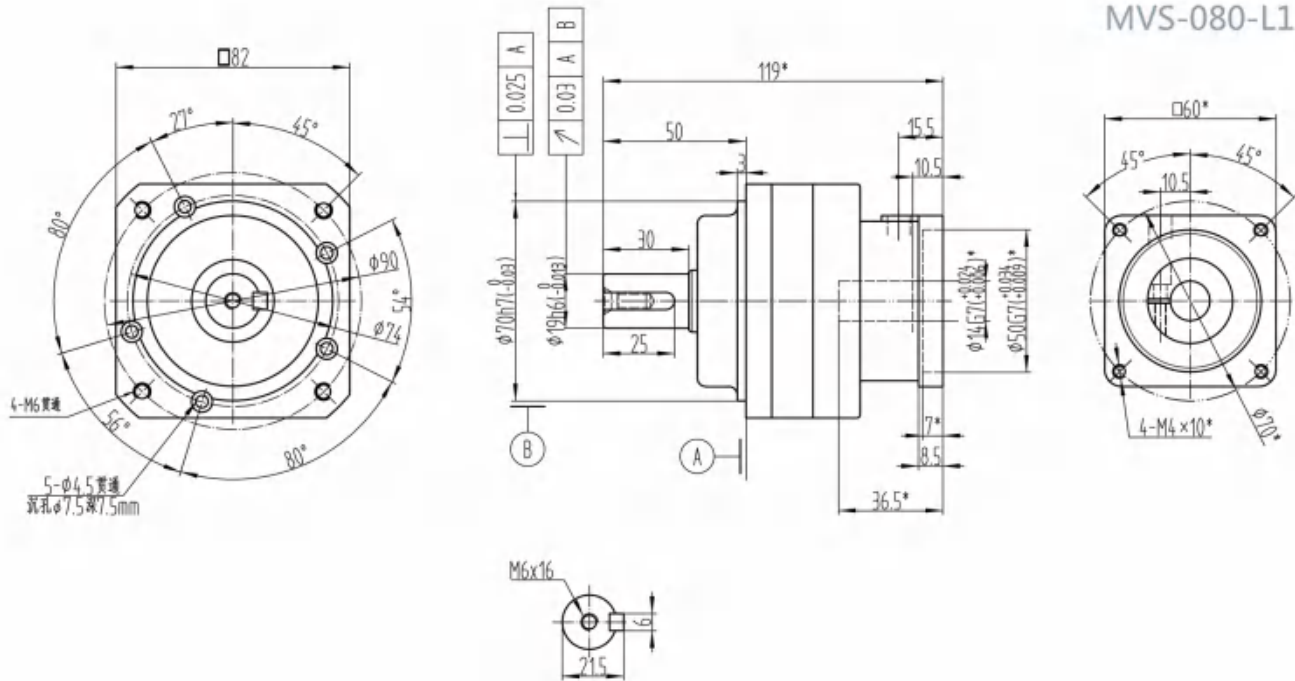


MVS-080-L2

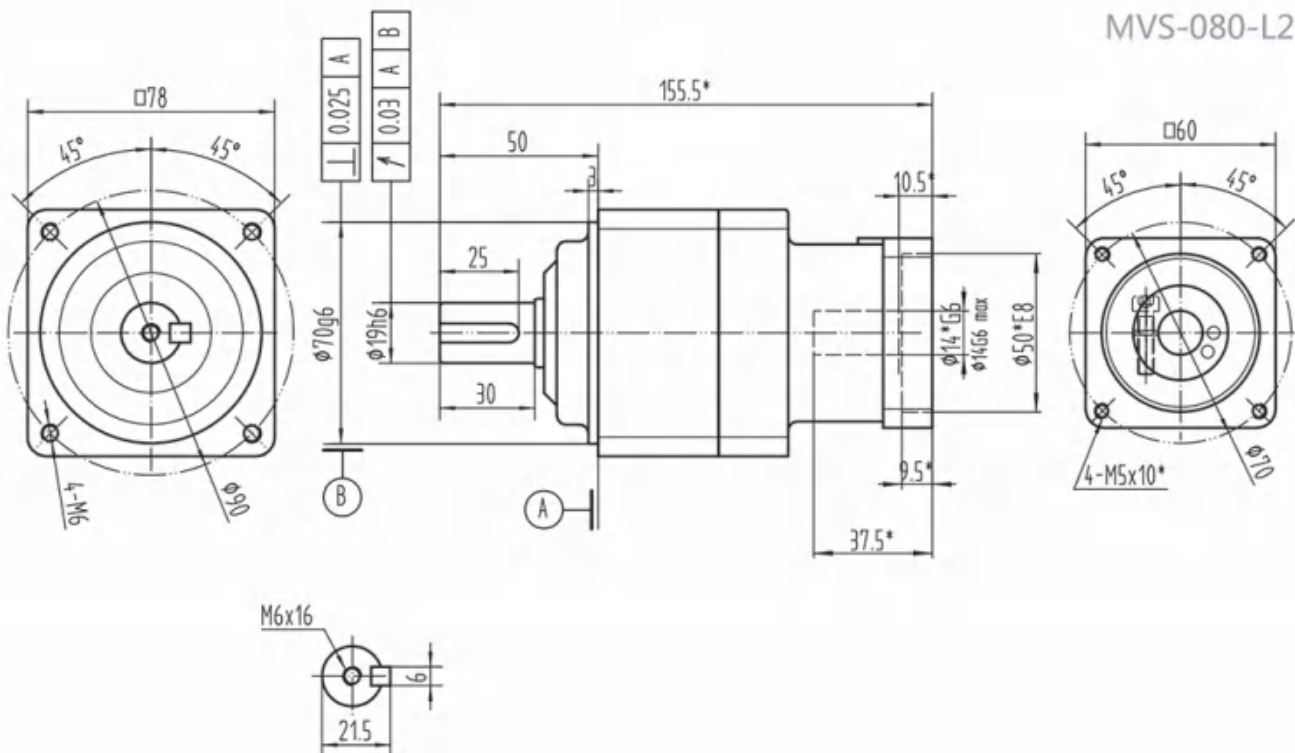


*Dimensions based on servo-motor, please contact us for custom made order.
注有*尺寸:代表可根据客户需求定制产品,如有需要,请联系我们!

Drawing / Size

MVS-100-L1

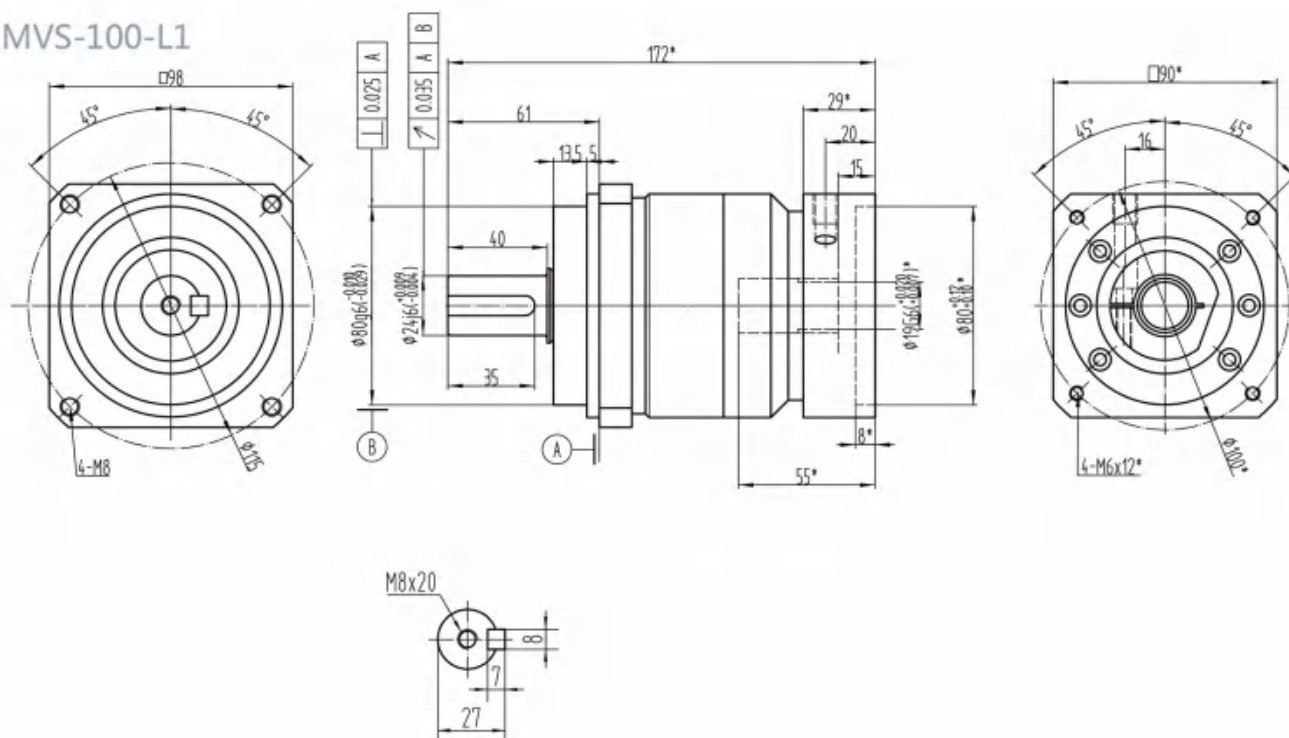


MVS-100-L2

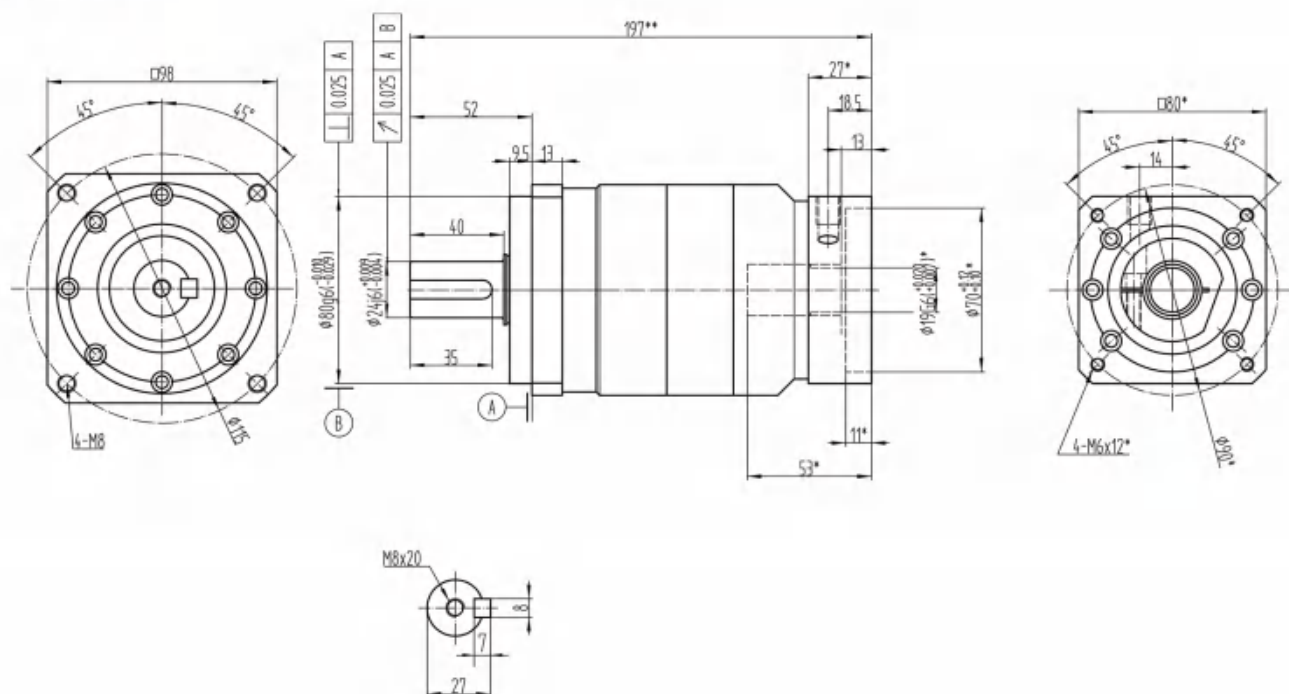


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVS-125-L1

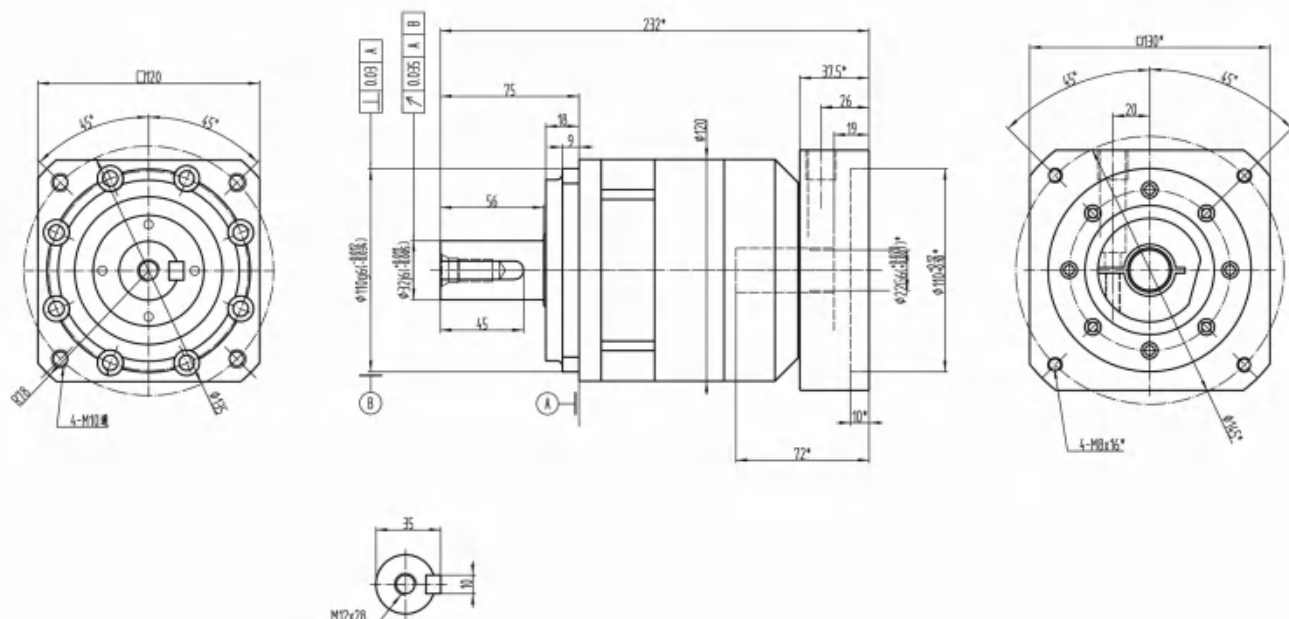

MVS-125-L2

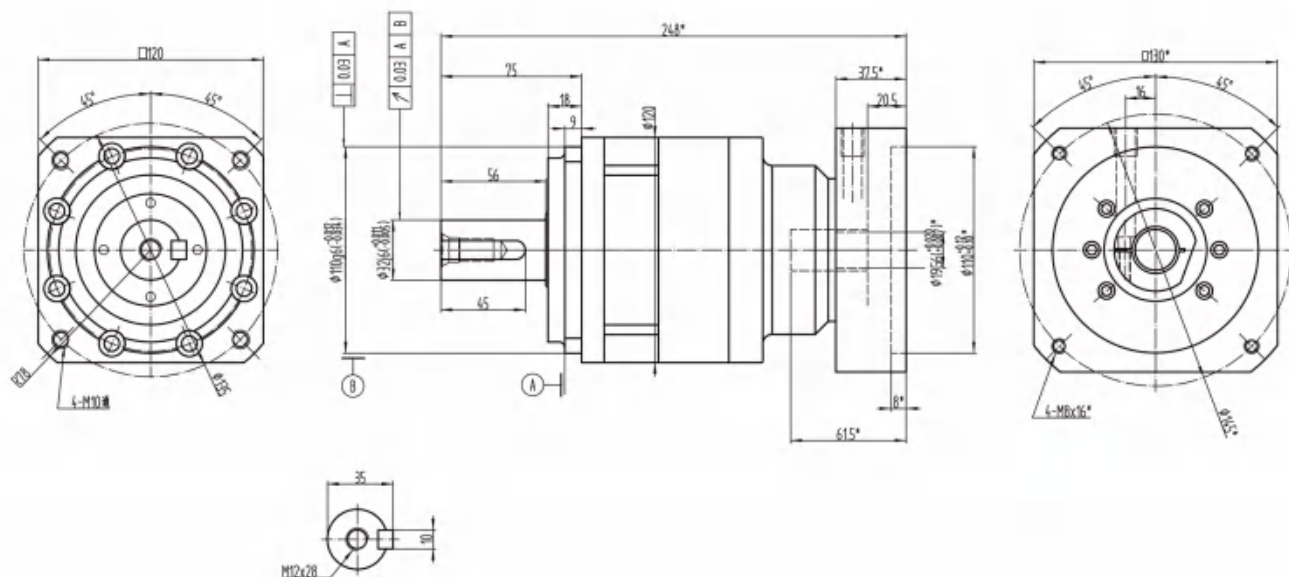

*Dimensions based on servo-motor, please contact us for custom made order.

注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MVS-060																	
Symb.	i	T _{2N}	T _{2Max}	n _{1N}	n _{1Max}	j ₁	C _{tr}	F _{200Max}	F _{250Max}	J ₁	η	L _h	T	Lub	PC	MP	dB
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				
I STAGE	3	5.2	26	4000	8000	P3≤ Stand 标准	0.58	230	200	0.04	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤73
	5	5.7	26				0.58										
	7	5.7	26				0.58										
	9	5.2	26				0.52										
	10	5.2	26				0.52										
II STAGE	12	5.2	26				0.58										
	15	5.2	26				0.58										
	20	5.2	26				0.58										
	25	5.7	26				0.58										
	35	5.7	26				0.58										
	45	5.7	26				0.58										
	50	5.7	26				0.58										
	70	5.7	26				0.58										
	81	5.7	26				0.58										
	100	5.7	26				0.58										

MVS-080																	
Symb.	i	T _{2N}	T _{2Max}	n _{1N}	n _{1Max}	j ₁	C _{tr}	F _{200Max}	F _{250Max}	J ₁	η	L _h	T	Lub	PC	MP	dB
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				
I STAGE	3	40	190	3400	6000	P3≤ Stand 标准	6.1	1600	1200	0.54	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤73
	5	40	190				6.1										
	7	35	190				5.5										
	9	40	190				6.1										
	10	40	190				6.1										
II STAGE	12	40	190				6.1										
	15	40	190				6.1										
	20	40	190				6.1										
	25	40	190				6.1										
	35	35	190				5.5										
	45	35	190				5.5										
	50	40	190				6.1										
	70	40	190				6.1										
	81	40	190				6.1										
	100	40	190				6.1										

Performance table

MVS-100																	
Symb.	i	T _{2N}	T _{2Hot}	n _{1N}	n _{1Max}	j _i	C _{ti}	F _{20MMax}	F _{25MMax}	J _i	η	t _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arc/min	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	100	480	2600	4800	P3≤ Stand 标准	16.5	2000	1000	1.8	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤75
	5	100	480														
	7	100	480														
	9	90	480														
	10	90	480														
II STAGE	12	100	480														
	15	100	480														
	20	100	480														
	25	100	480														
	35	100	480														
	45	100	480														
	50	100	480														
	70	100	480														
	81	100	480														
	100	100	480														


MVS-125																	
Symb.	i	T _{2N}	T _{2Hot}	n _{1N}	n _{1Max}	j _i	C _{ti}	F _{20MMax}	F _{25MMax}	J _i	η	t _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arc/min	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	208	624	2000	4000	P3≤ Stand 标准	25	6700	3000	3.25	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤80
	4	290	870														
	5	330	990														
	7	300	900														
	10	230	690														
II STAGE	15	208	624														
	16	220	660														
	20	290	870														
	25	330	990														
	30	310	930														
	35	300	900														
	40	260	780														
	50	330	990														
	70	300	900														
	100	230	690														

MVBR SERIES



此款应用高端直角解决方案，保持原有MVB系列的设计与性能。

A high-performance right-angle solution for servo applications that keeps MVB's design and characteristics.

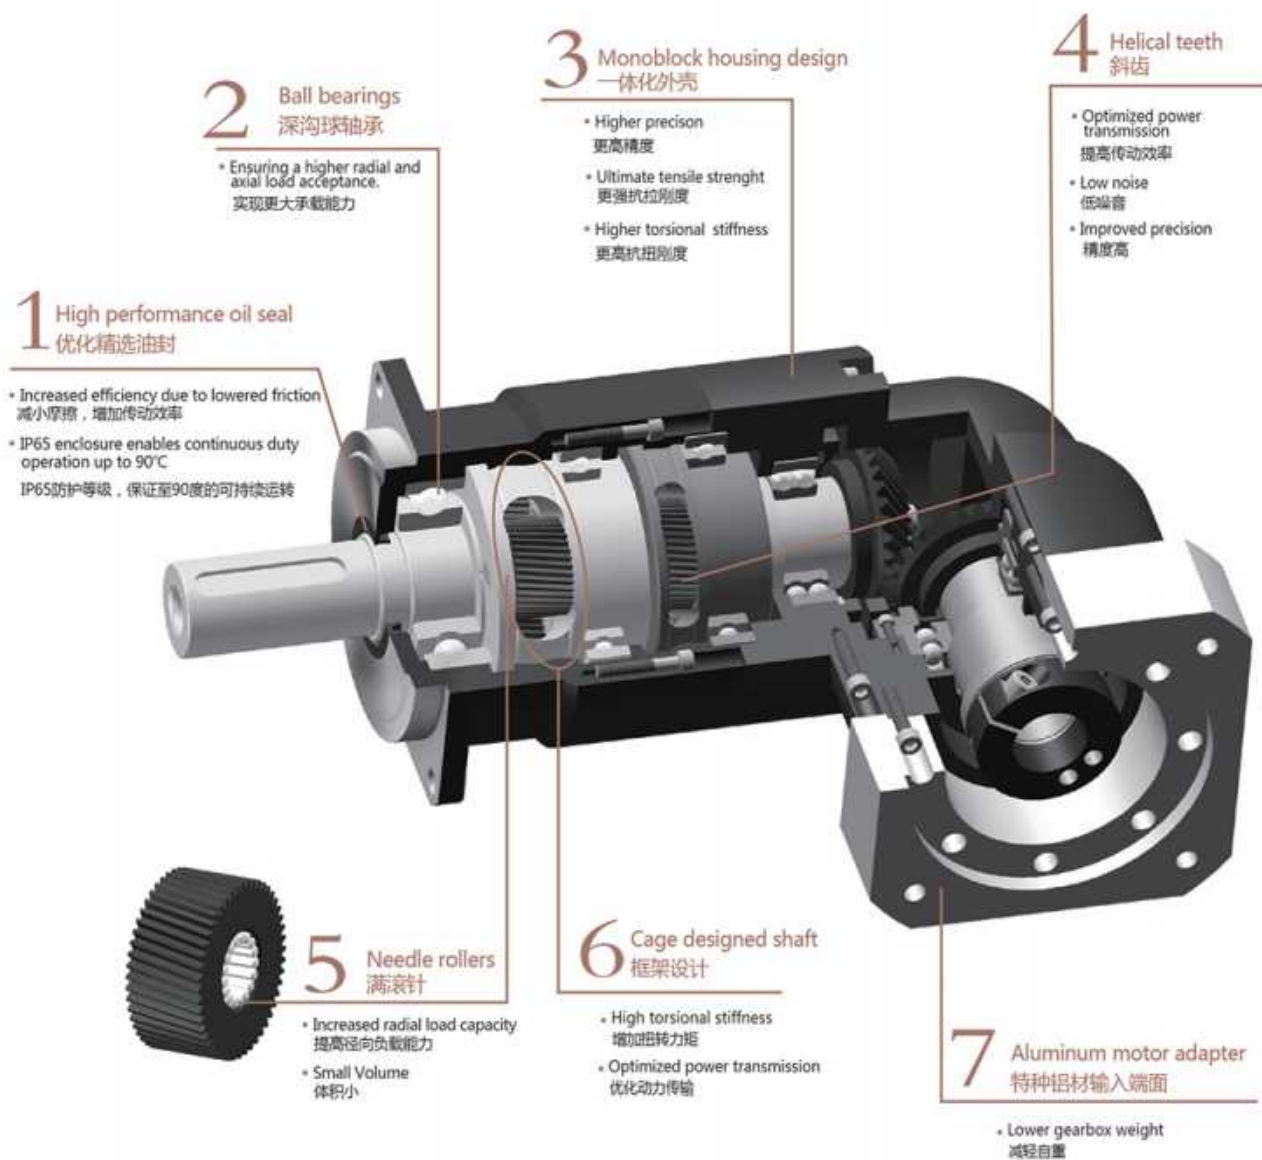

造型数据:


Selection data:

扭矩 (Nm)	14-600
速比	3-100
背隙 (arcmin)	≤8
最大工作温度 (°C)	90
噪音 (dB)	63-74


Nominal output torque (Nm)	14-600
Reduction ratio	3-100
Backlash (arcmin)	≤8
Max.working temperature (°C)	90
Noise (dB)	63-74

Drawing / Size

MVBR-040-L1

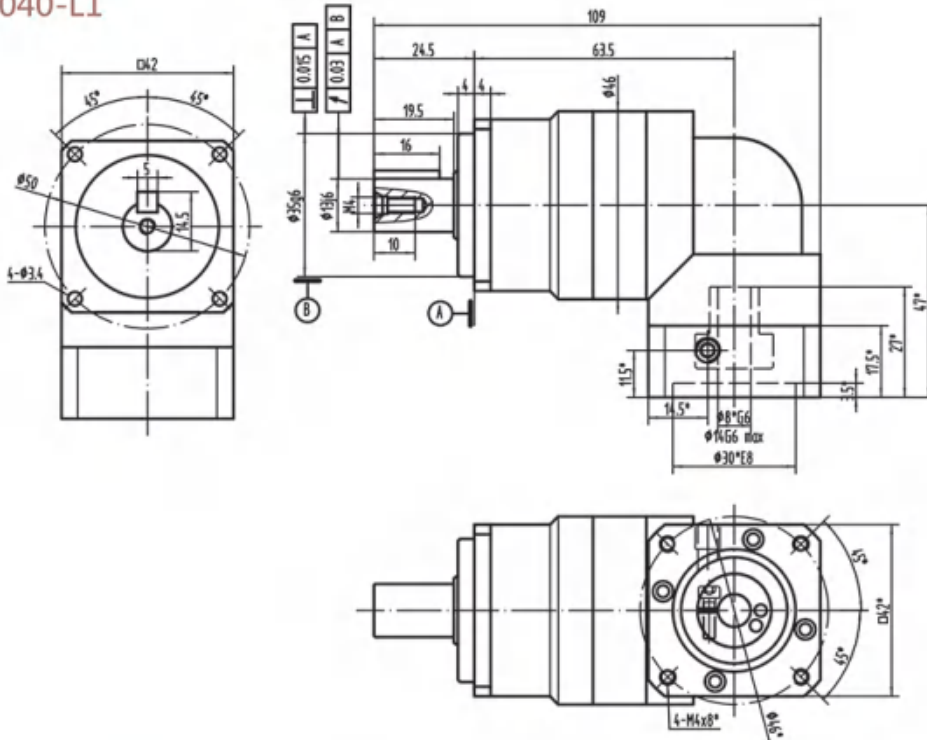


MVBR-040-L2

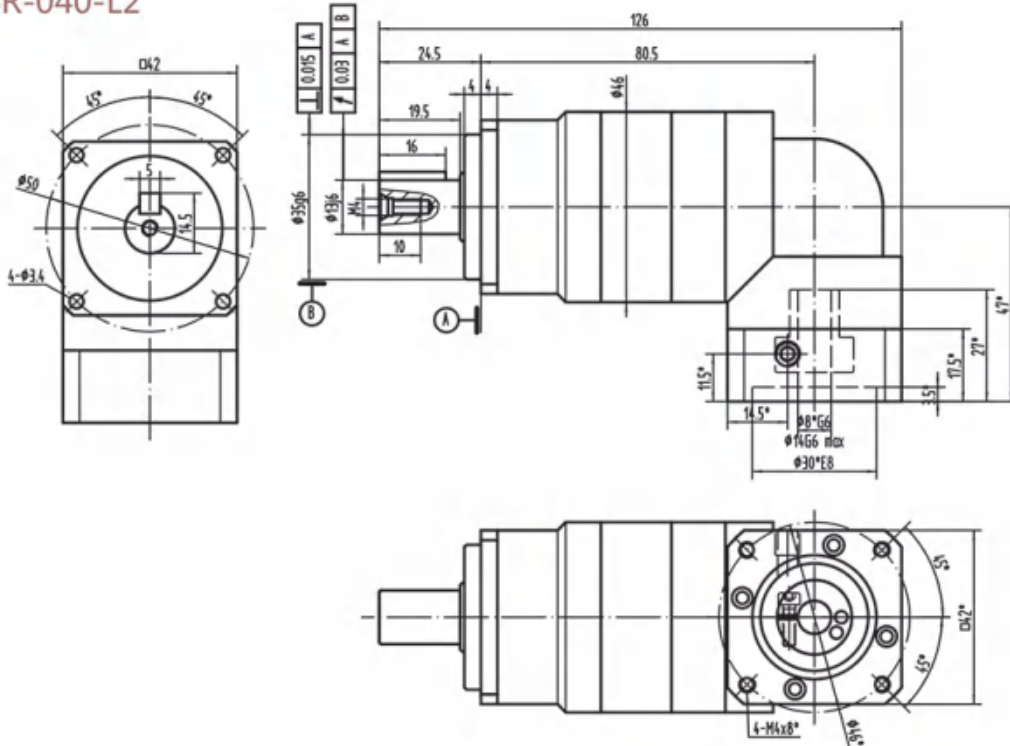


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVBR-060-L1

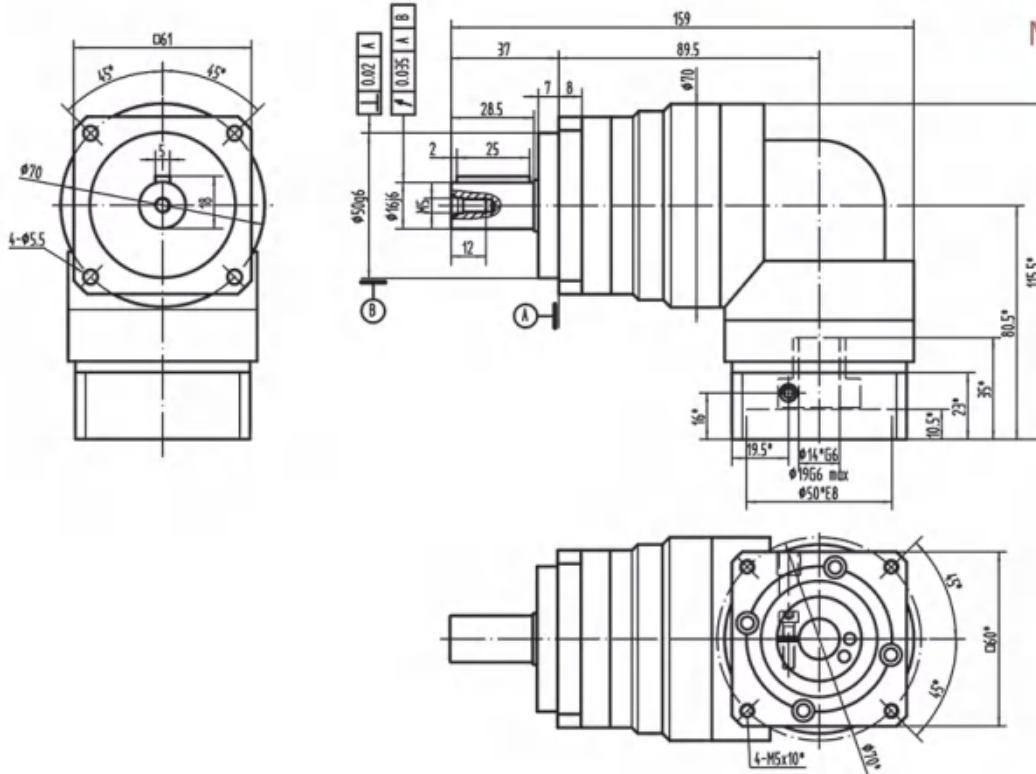


MVBR-060-L2

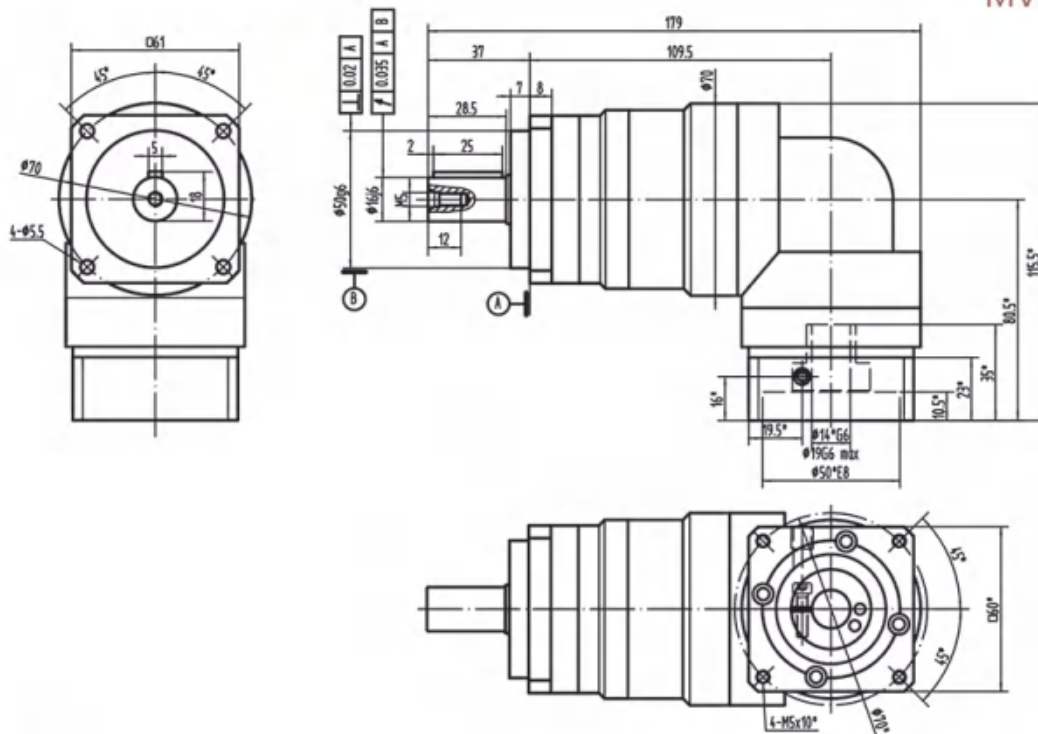


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVBR-090-L1


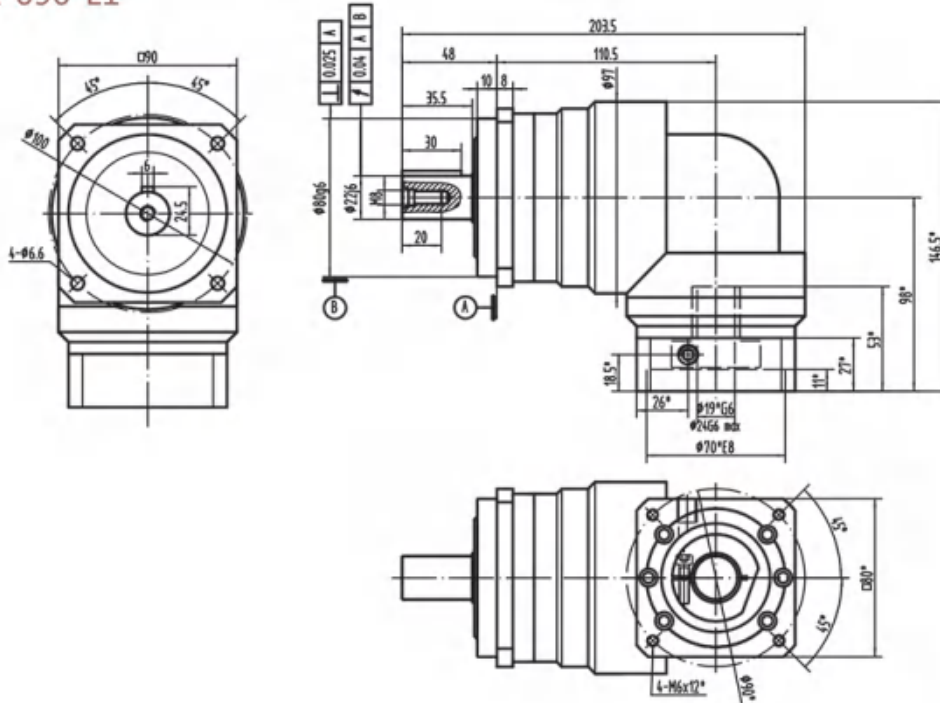


MVBR-090-L2

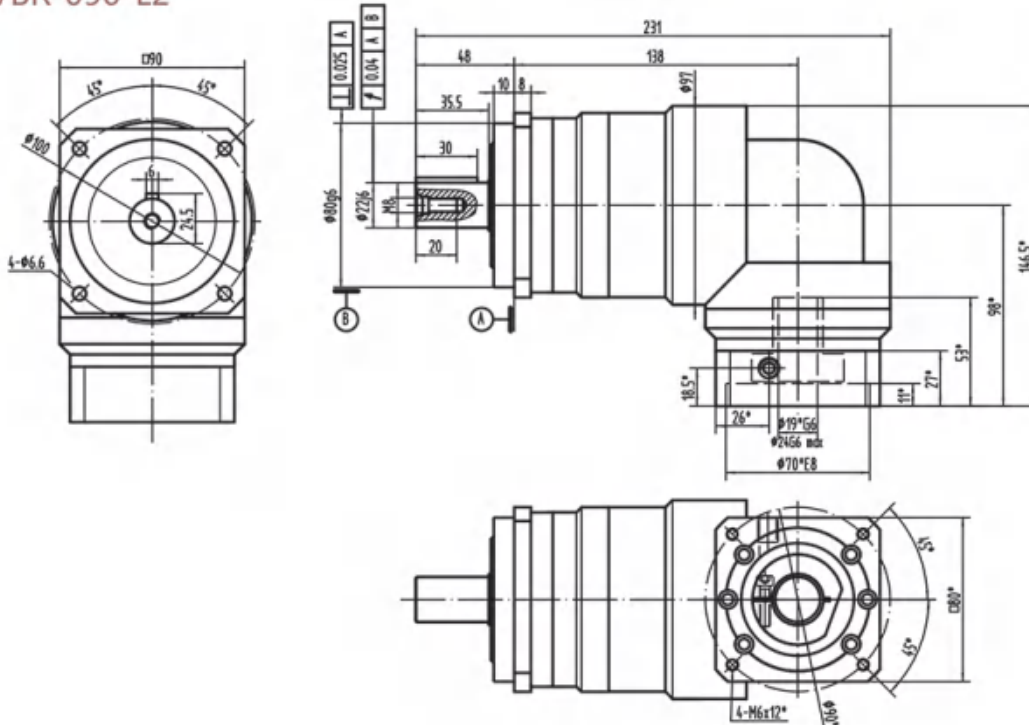

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！



Drawing / Size

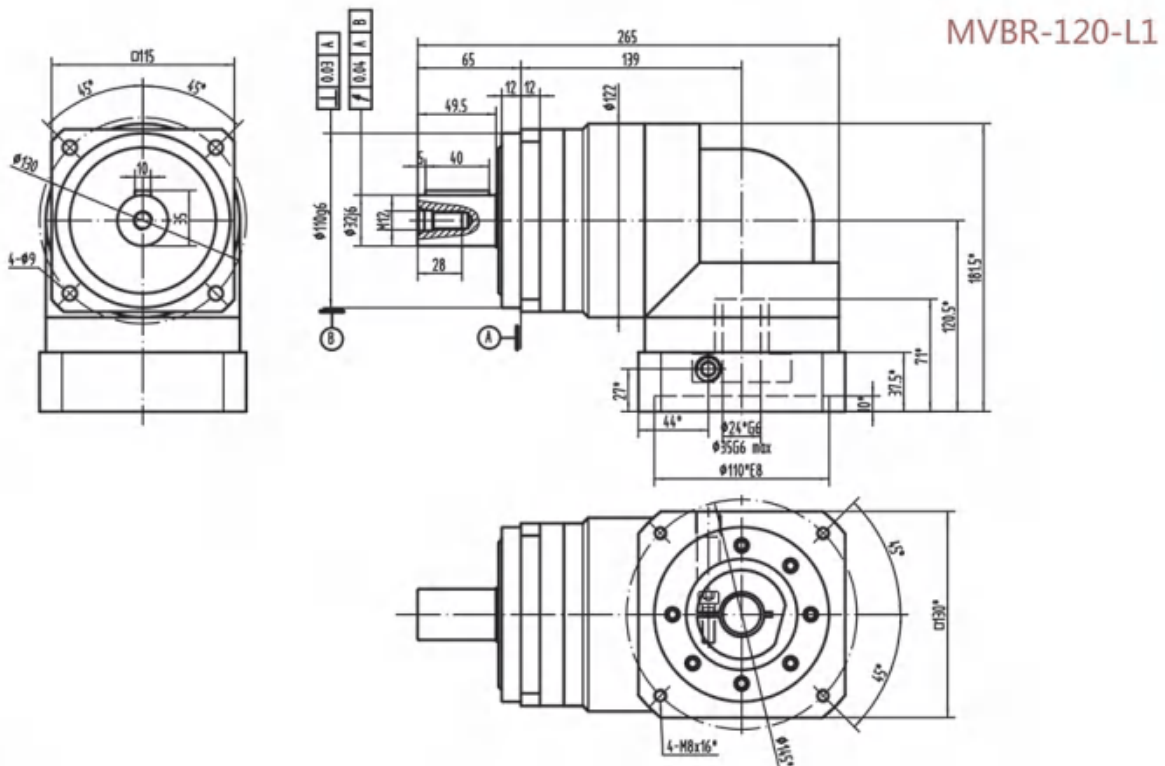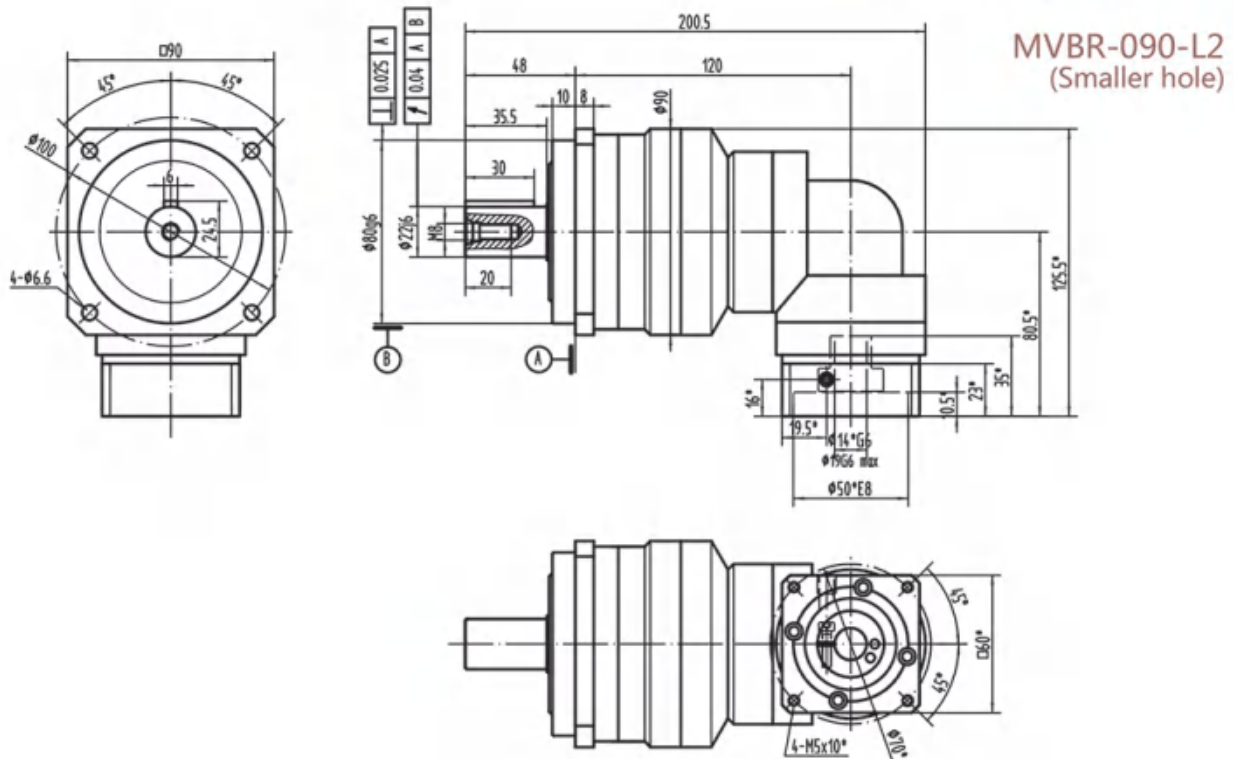



*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVBR-120-L2

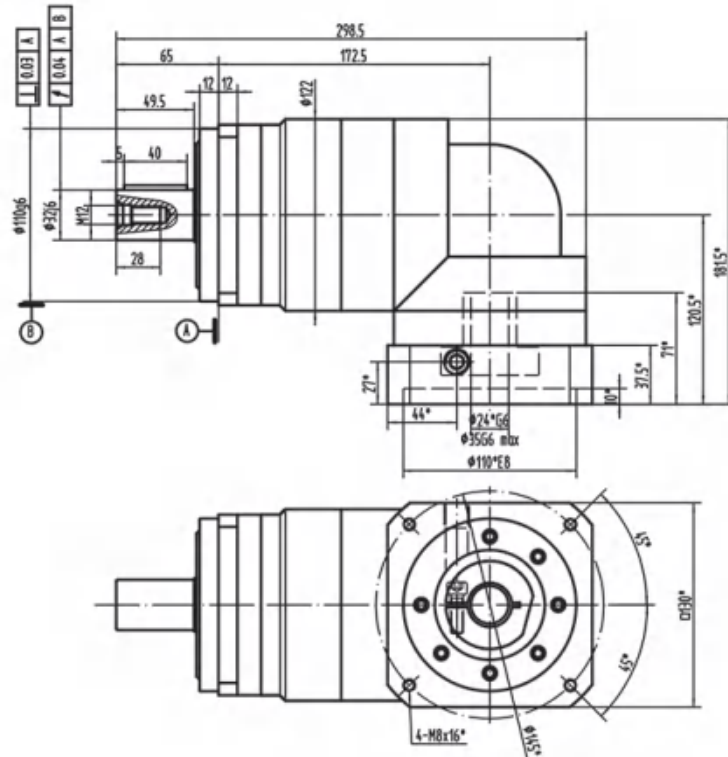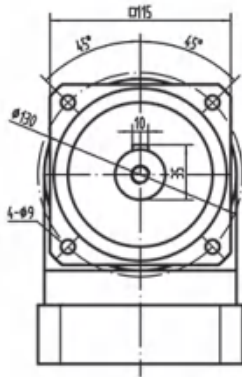


MVBR-120-L2
(Smaller hole)

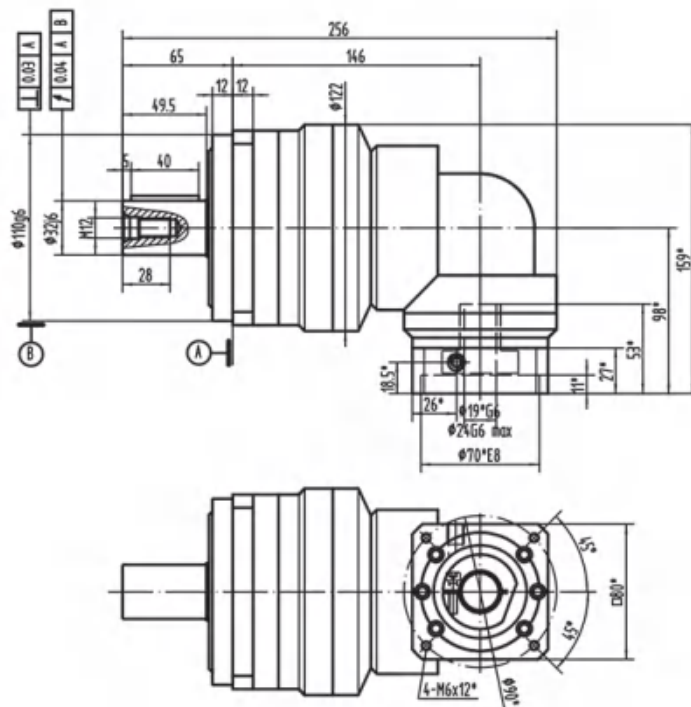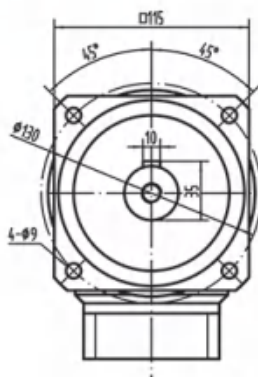


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

MVBR-140-L1

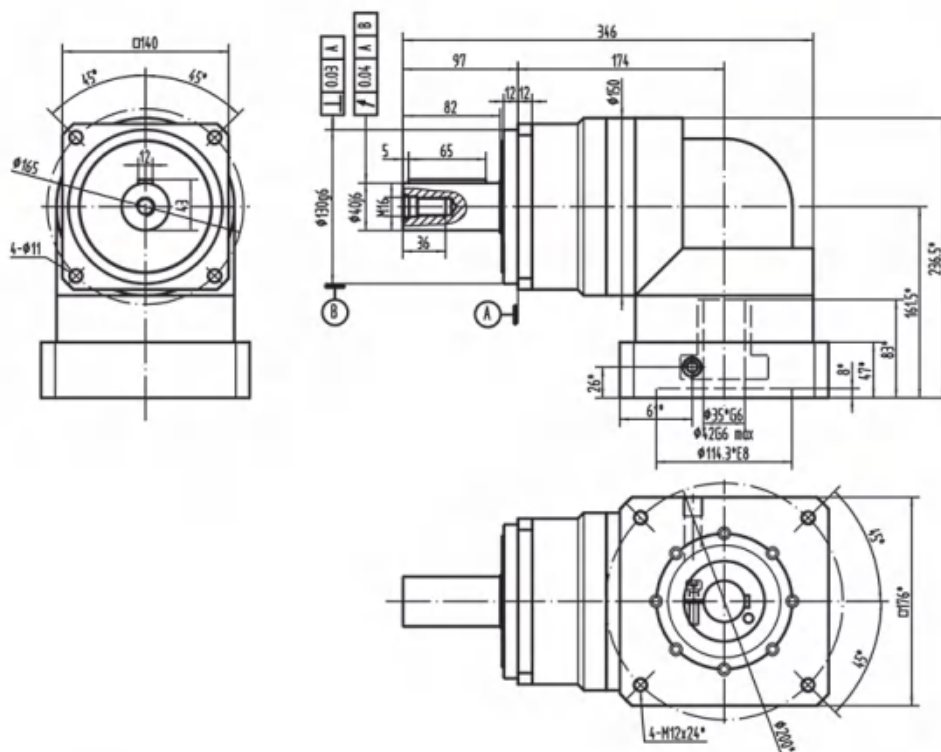


MVBR-140-L2

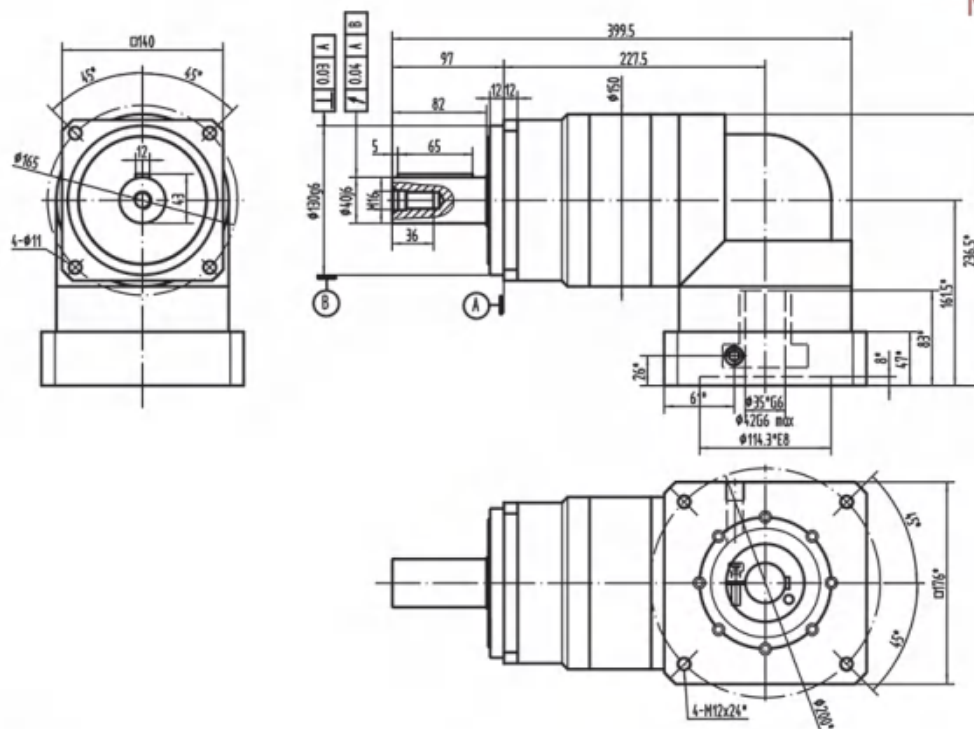


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVBR-140-L2 (Smaller hole)

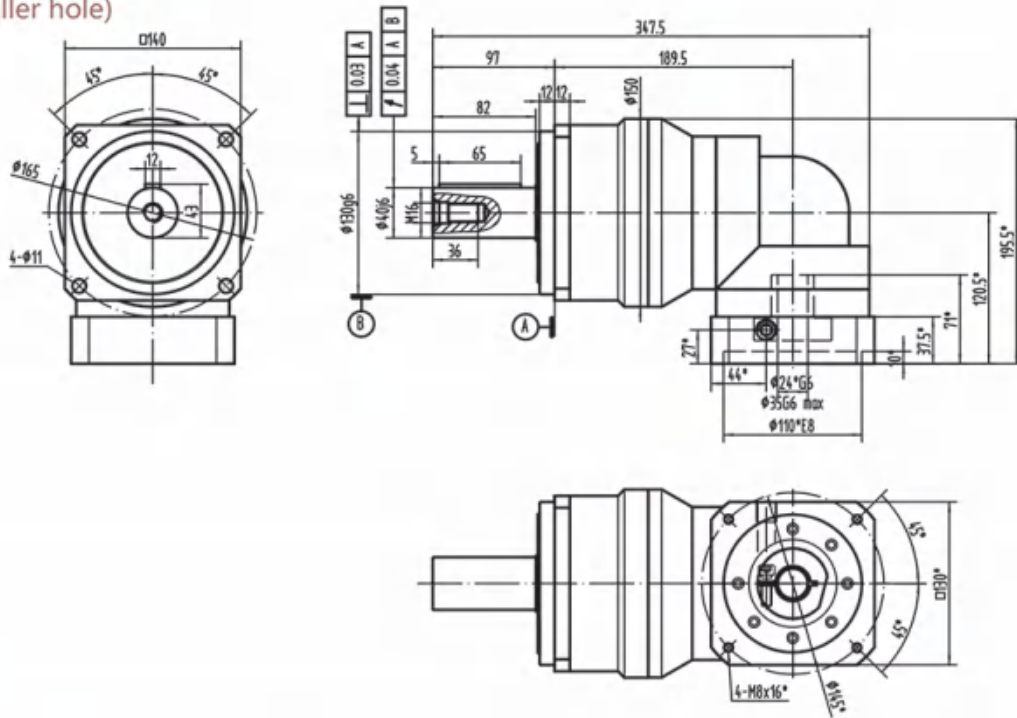


MVBR-180-L1

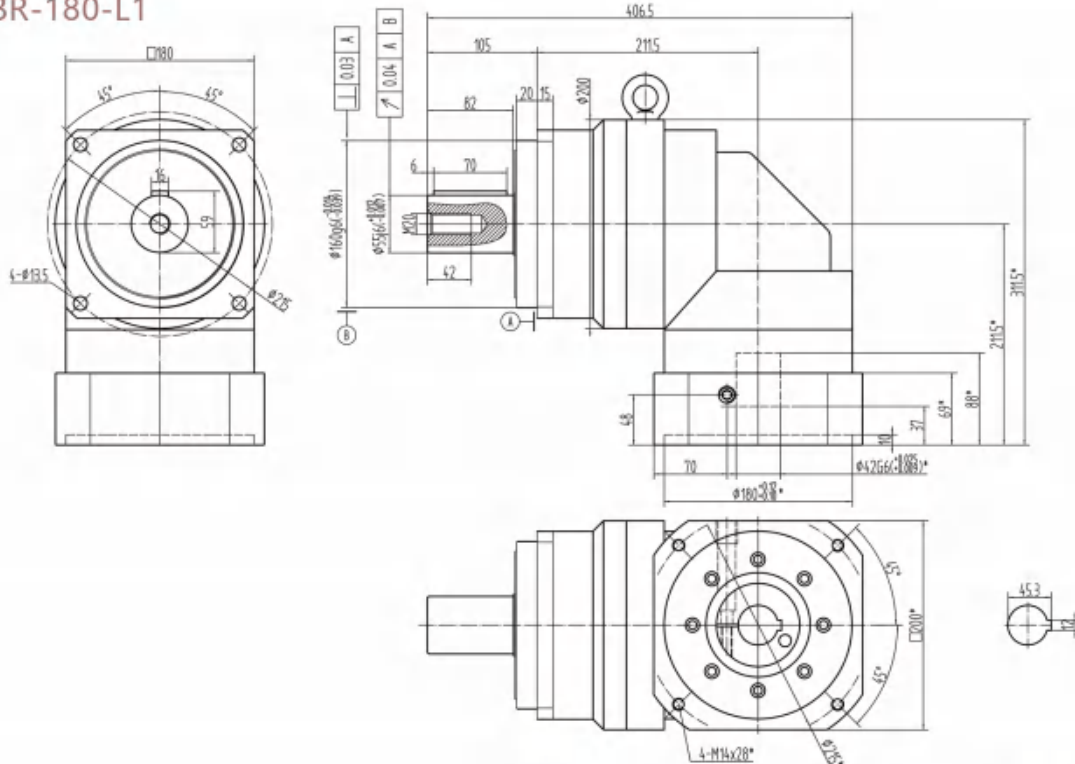


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVBR-180-L2

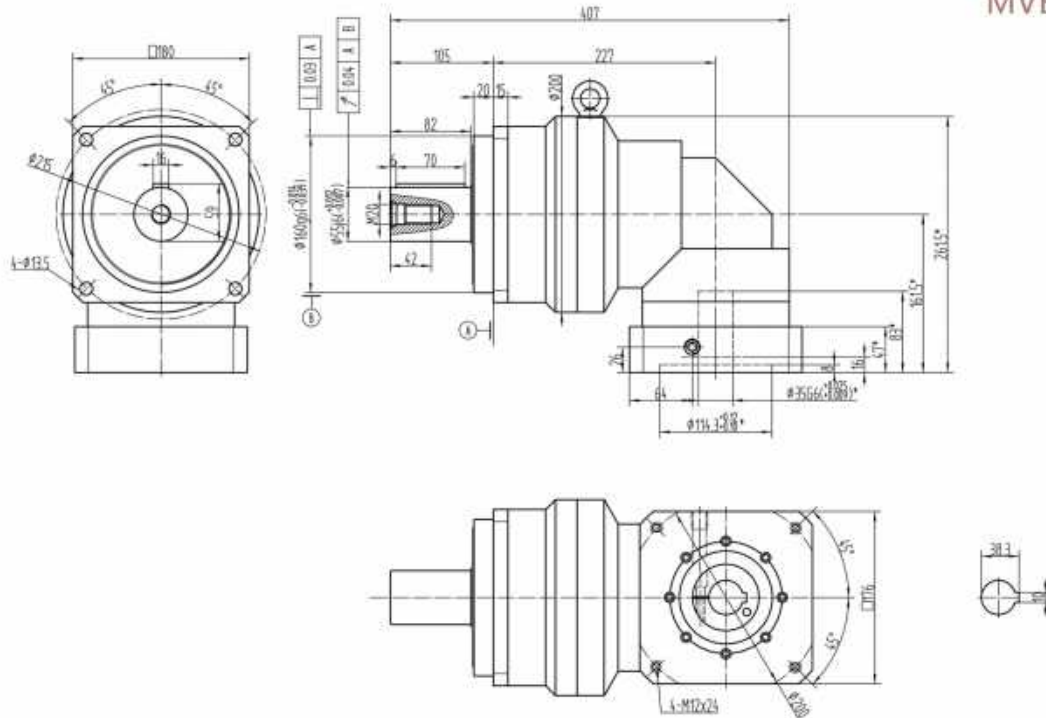

MVBR-220-L2

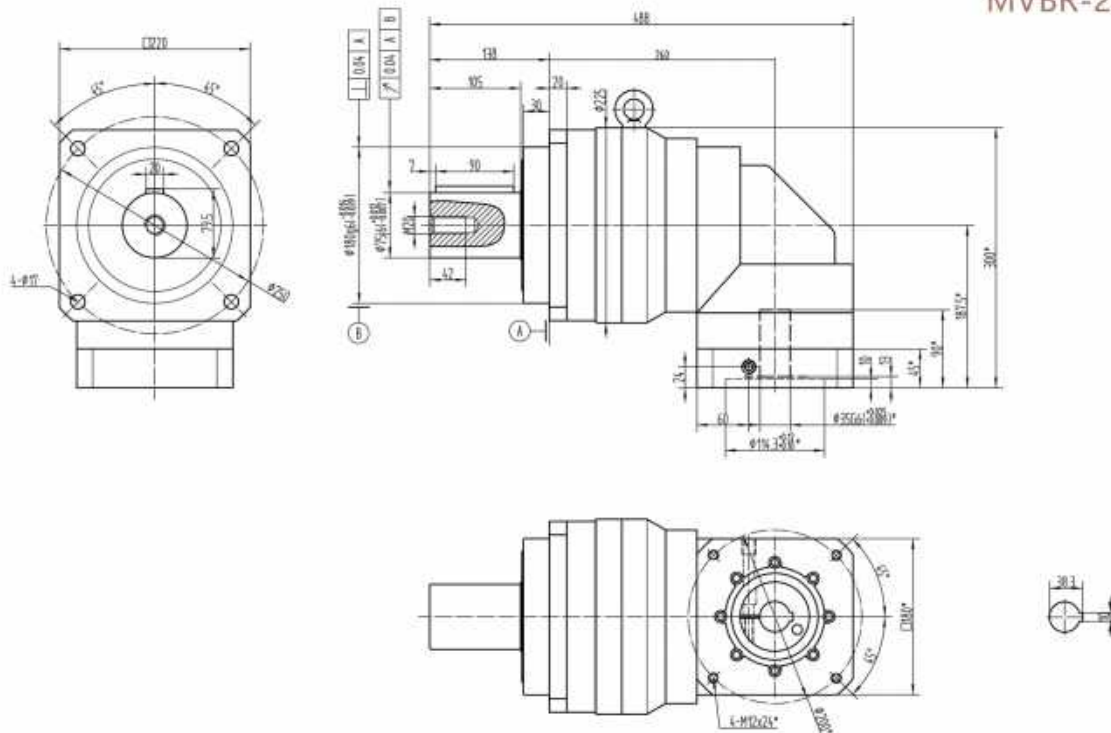

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MVBR-040																		
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	j _t arcmin	C _{2t} Nm/arcmin	F _{2RM} N	F _{2AM} N	J ₁ kgcm ²	η %	L _h h	T °C	Lub	PC	MP		dB
I STAGE	3	14	2×T _{2N}	4000	8000	≤3	3	700	610	0.03	≥95	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向		
	4	14					3											
	5	20					3											
	6	20					3											
	7	20					2.2											
	8	20					3											
	9	14					3											
	10	14					2.2											
II STAGE	15	14				≤5	3				≥90							
	20	14					3											
	35	20	3															
	40	20	3															
	50	20	3															
	80	20	3															
	100	14	2.2															

MVBR-060																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j _t	C _{2t}	F _{2RM}	F _{2AM}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	22	2×T _{2N}	3000	6000	≤8	7	1200	1050	0.16	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤66
	4	30					7			0.14							
	5	45					7			0.13							
	6	45					7			0.13							
	7	45					7			0.13							
	8	45					7			0.13							
	9	30					7			0.13							
	10	30					7			0.13							
II STAGE	15	30					7			0.13							
	20	30					7			0.13							
	35	45					7			0.13							
	40	45					7			0.13							
	50	45					7			0.13							
	80	45					7			0.13							
	100	30					7			0.13							

Performance table

MVBR-090																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j _t	C _{2t}	F _{2StMax}	F _{2dMax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	65	2×T _{2N}	3000	6000	≤8	14	2400	2200	0.61	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤68
	4	85					14			0.48							
	5	90					14			0.47							
	6	90					14			0.47							
	7	90					14			0.45							
	8	90					14			0.45							
	9	65					14			0.42							
	10	65					14			0.40							
II STAGE	15	65					14			0.45							
	20	85					14			0.45							
	35	90					14			0.45							
	40	90					14			0.45							
	50	90					14			0.40							
	80	90					14			0.40							
	100	65					14			0.40							

MVBR-120																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j _t	C _{2t}	F _{2StMax}	F _{2dMax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	150	2×T _{2N}	3000	6000	≤8	25	4200	3800	3.25	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤72
	4	200					25			2.74							
	5	260					25			2.71							
	6	300					25			2.71							
	7	300					25			2.62							
	8	300					25			2.60							
	9	200					25			2.59							
	10	200					25			2.57							
II STAGE	15	200					25			0.45							
	20	300					25			0.45							
	35	300					25			0.45							
	40	300					25			0.45							
	50	300					25			0.40							
	80	300					25			0.40							
	100	200					25			0.40							

Performance table

MVBR-140																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{2RMMax}	F _{2AMMax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	270					50			9.21							
	4	350					50			7.54							
	5	420					50			7.42							
	6	520					50			7.42							
	7	600					50			7.14							
	8	600					50			7.14							
	9	400					50			7.08							
	10	400	2×T _{2N}	2000	4000	≤8	50	8500	7800	7.03	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤74
II STAGE	15	400					50			2.63							
	20	600					50			2.63							
	35	600					50			2.43							
	40	600					50			2.43							
	50	600					50			2.39							
	80	600					50			2.39							
	100	400					50			2.39							

MVBR-180																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{2RMMax}	F _{2AMMax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	500								28.98							
	4	900								23.67							
	5	900								23.29							
	6	900								22.29							
	7	900								22.48							
	8	900								22.48							
	9	550								22.40							
	10	550	2×T _{2N}	2000	4000	≤8	145	14500	13400	22.51	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤78
II STAGE	15	880								7.3							
	20	1250								7.3							
	35	1300								7.1							
	40	1250								6.92							
	50	1300								6.92							
	80	1300								6.72							
	100	880								6.72							

Performance table


MVBR-220																	
Symb.	i	T _{2N}	T _{2Ntot}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{2RMmax}	F _{2AMmax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	15	1200								22.79							
	20	1700								23.79							
	35	1800								22.59							
	40	1800	2×T _{2N}	1500	3000	≤8	225	20500	18800	21.83	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤81
	50	1800								21.83							
	80	1800								21.70							
	100	1200								21.60							

MVER SERIES



此款应用高端直角解决方案，保持原有MVE系列的设计与性能。

A high-performance right-angle solution for servo applications that keeps MVE's design and characteristics.

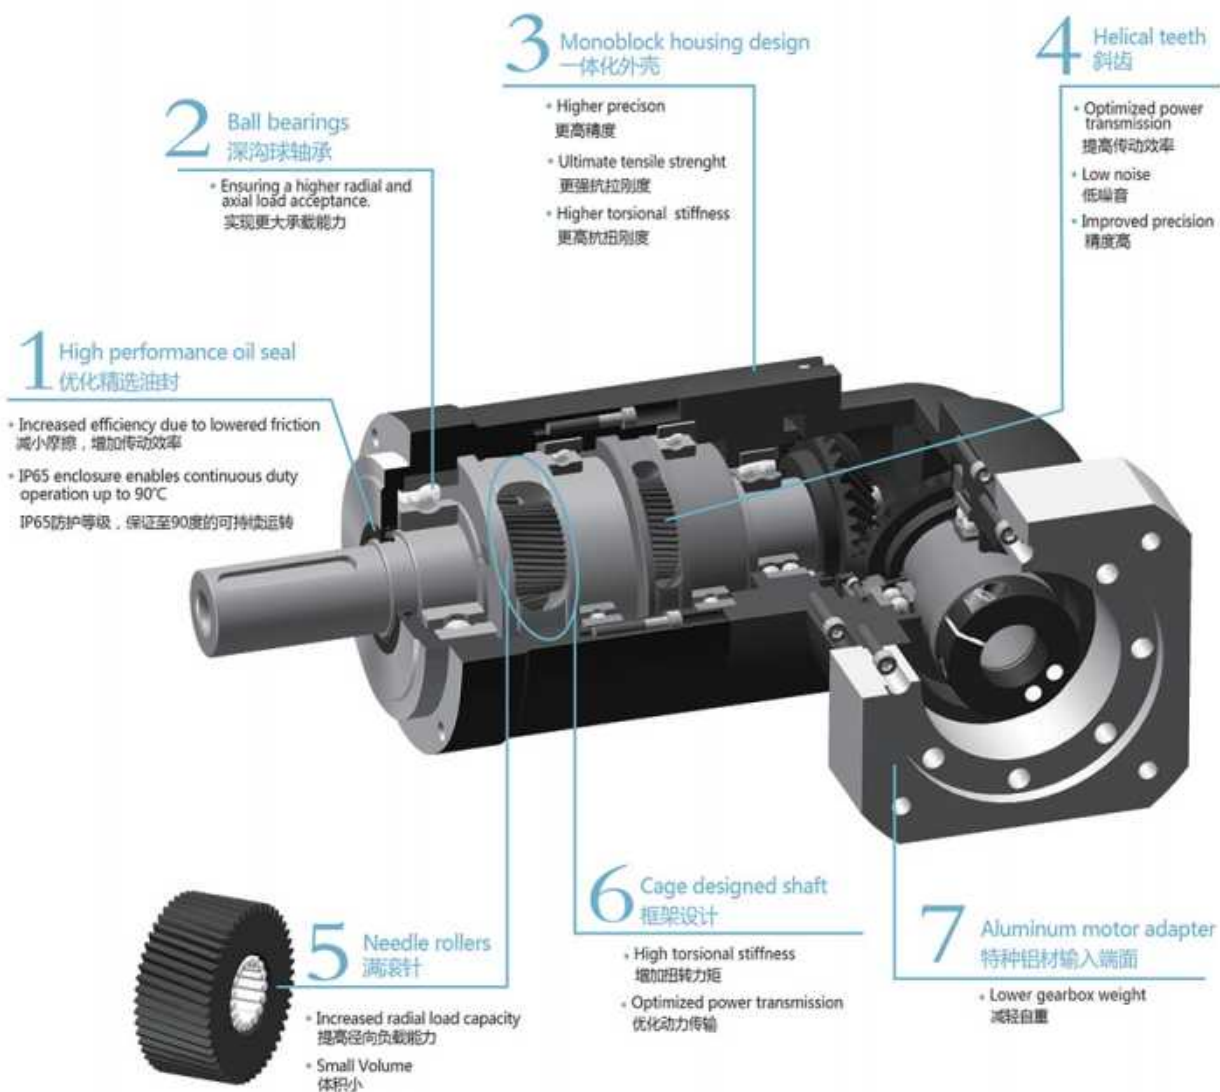


造型数据:


Selection data:

扭矩 (Nm)	14-600
速比	3-100
背隙 (arcmin)	≤8
最大工作温度 (°C)	90
噪音 (dB)	63-74

Nominal output torque (Nm)	14-600
Reduction ratio	3-100
Backlash (arcmin)	≤8
Max.working temperature (°C)	90
Noise (dB)	63-74

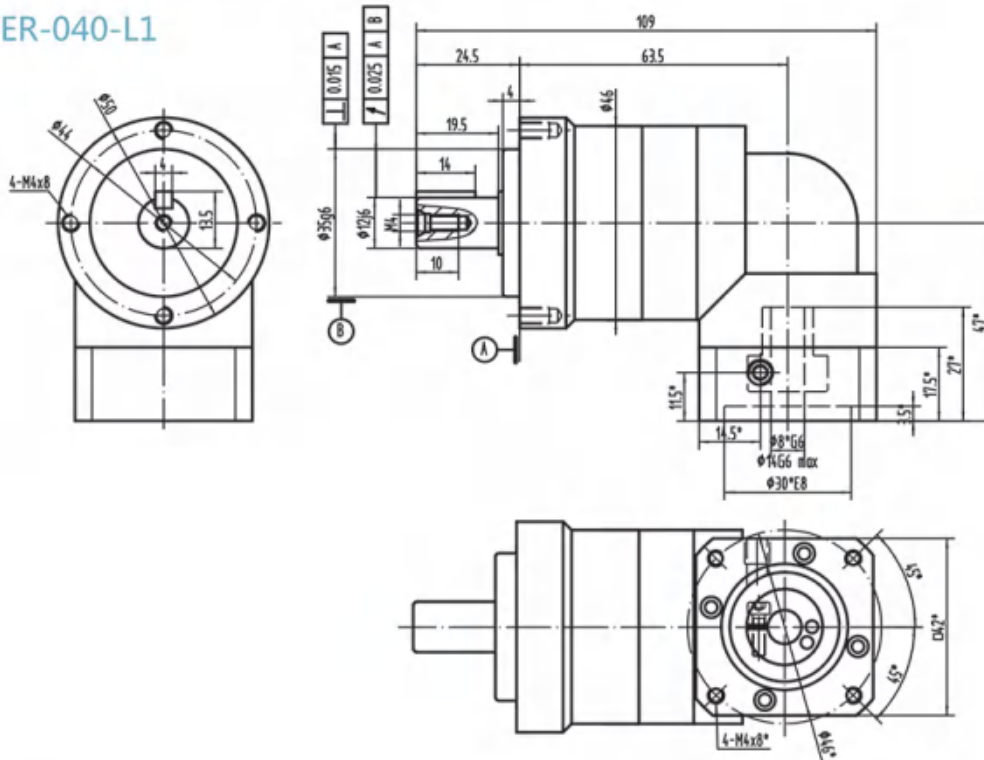


MVER-040-L2

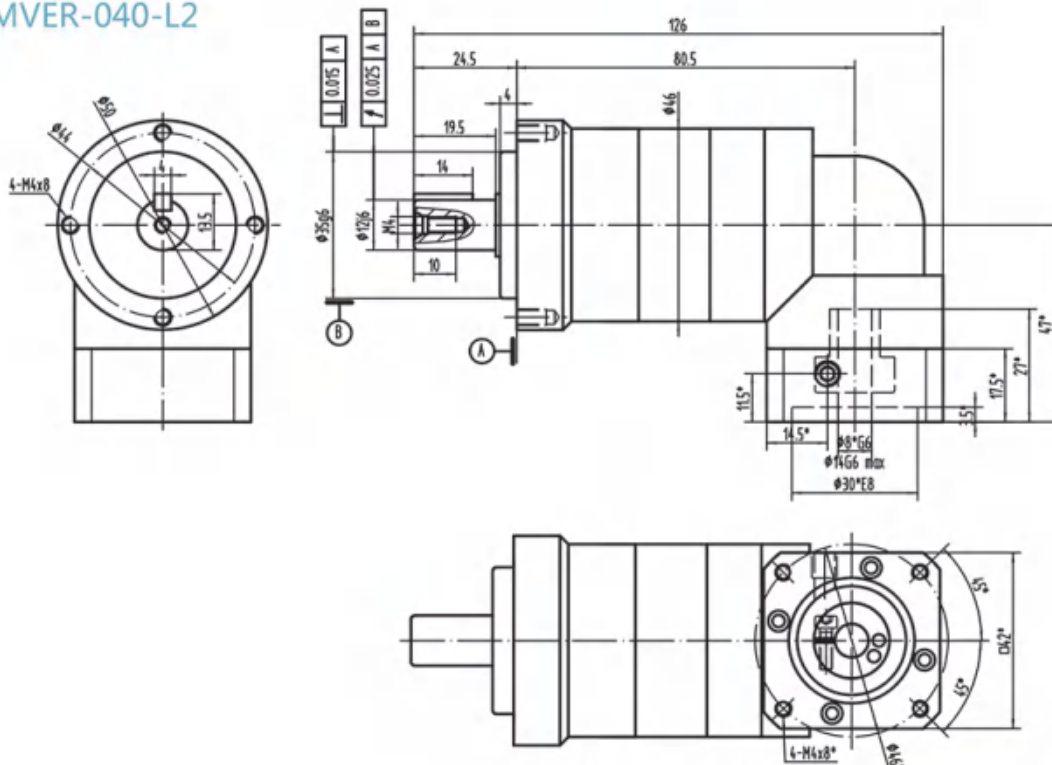


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVER-060-L1

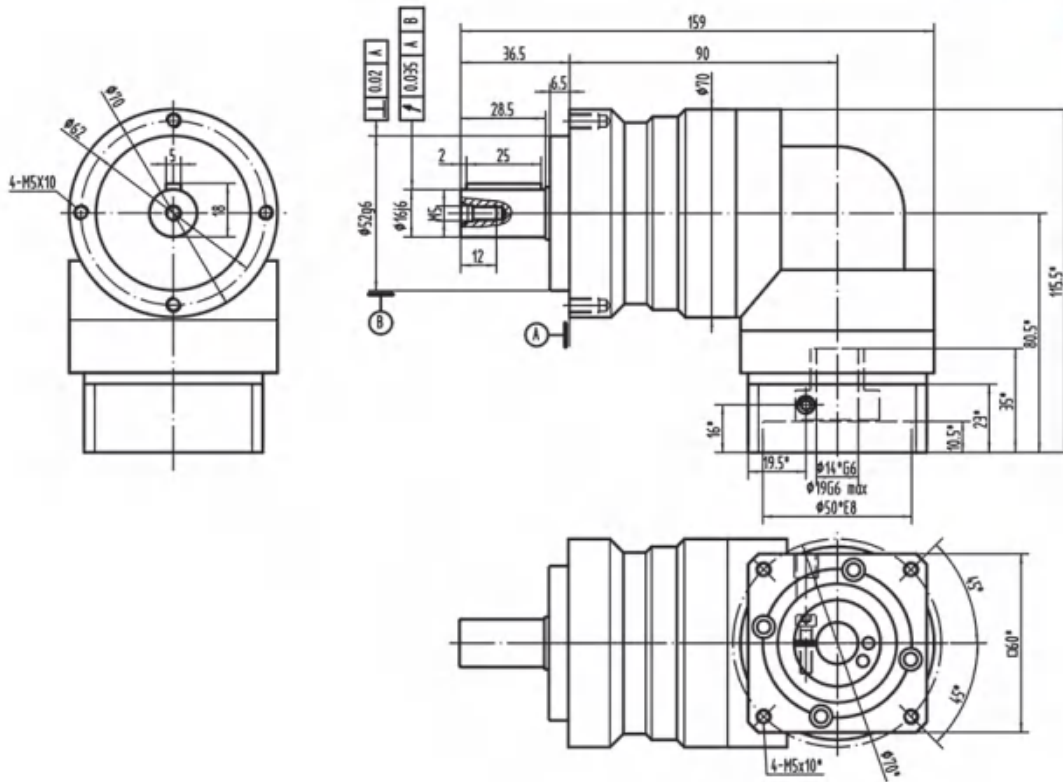


MVER-060-L2

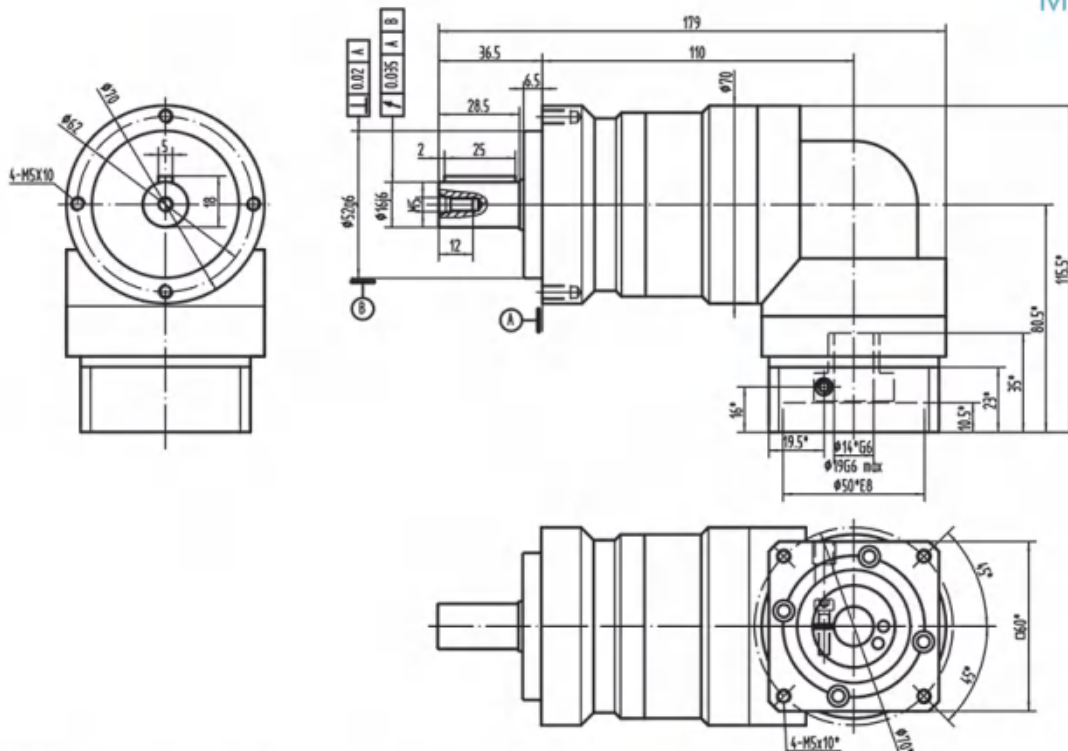


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVER-090-L2 (Smaller hole)

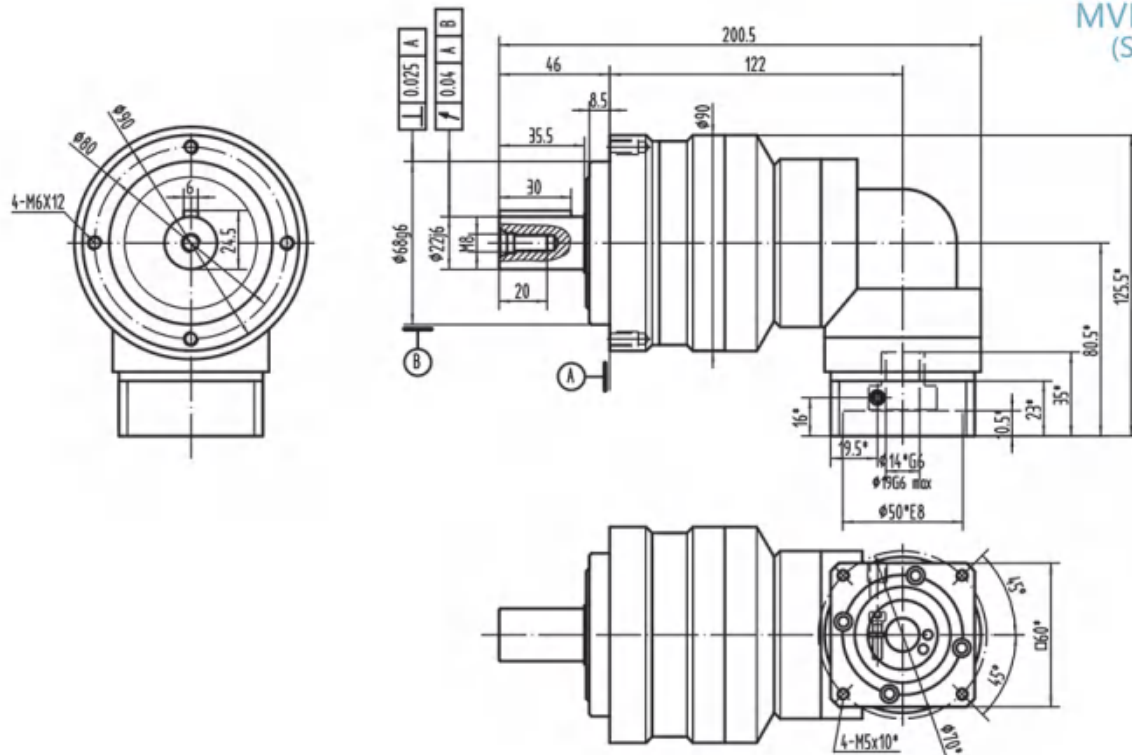


MVER-120-L1

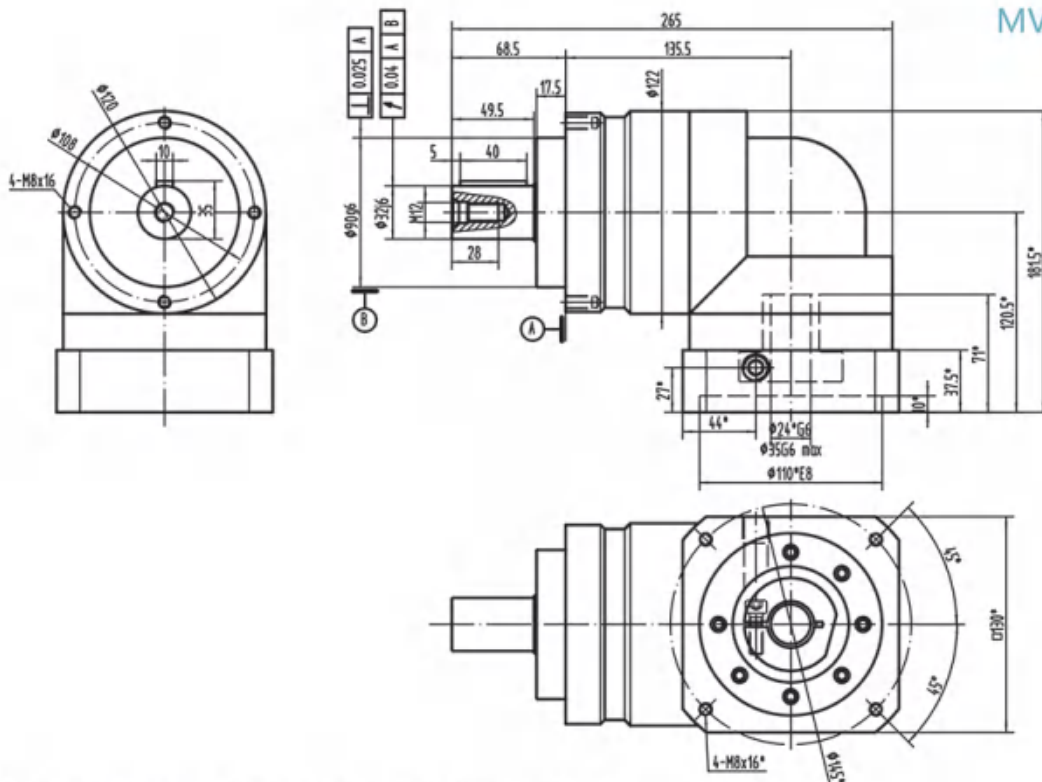


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size


MVER-120-L2

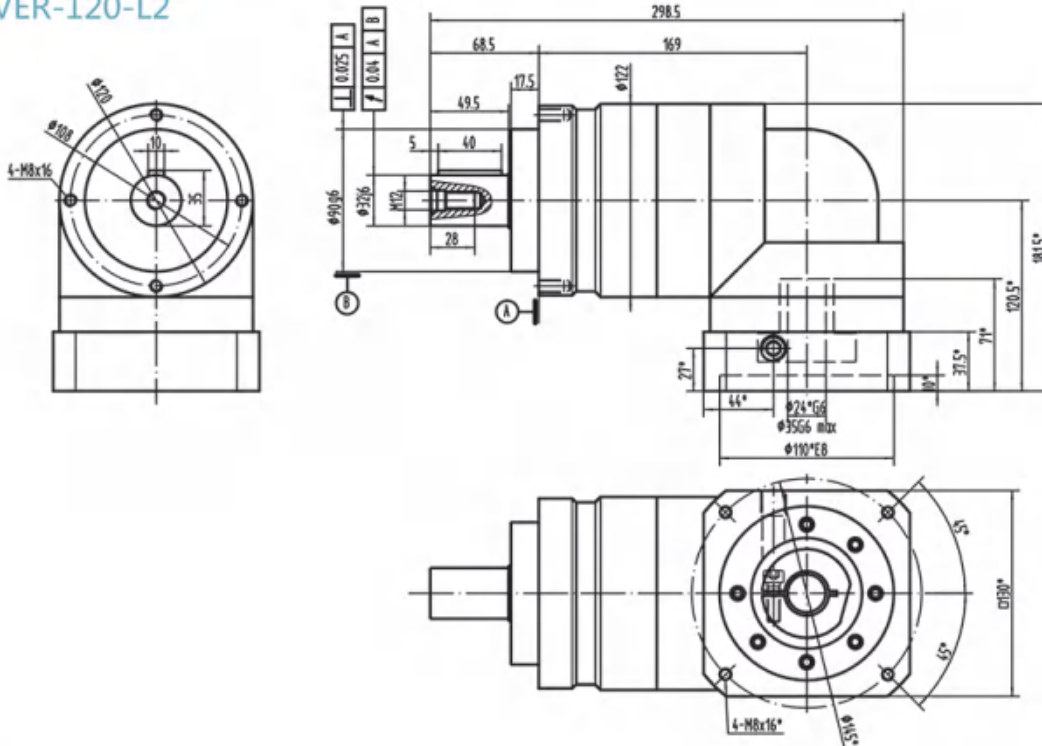

MVER-120-L2 (Smaller hole)

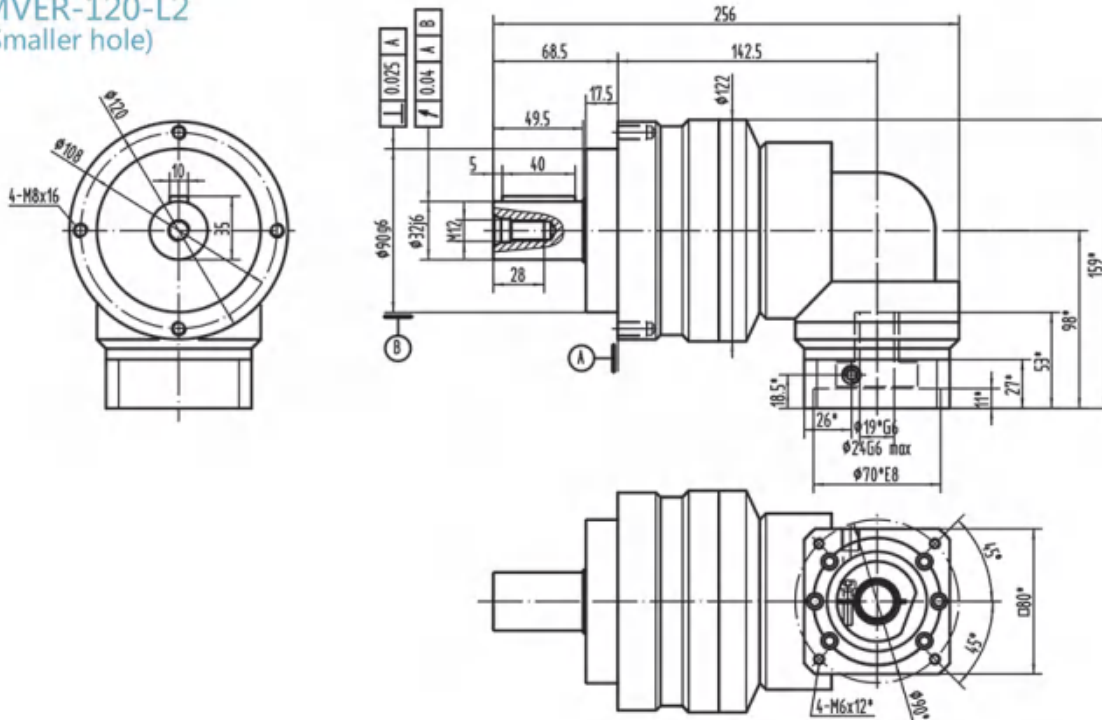


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！




Drawing / Size

MVER-155-L2 (Smaller hole)

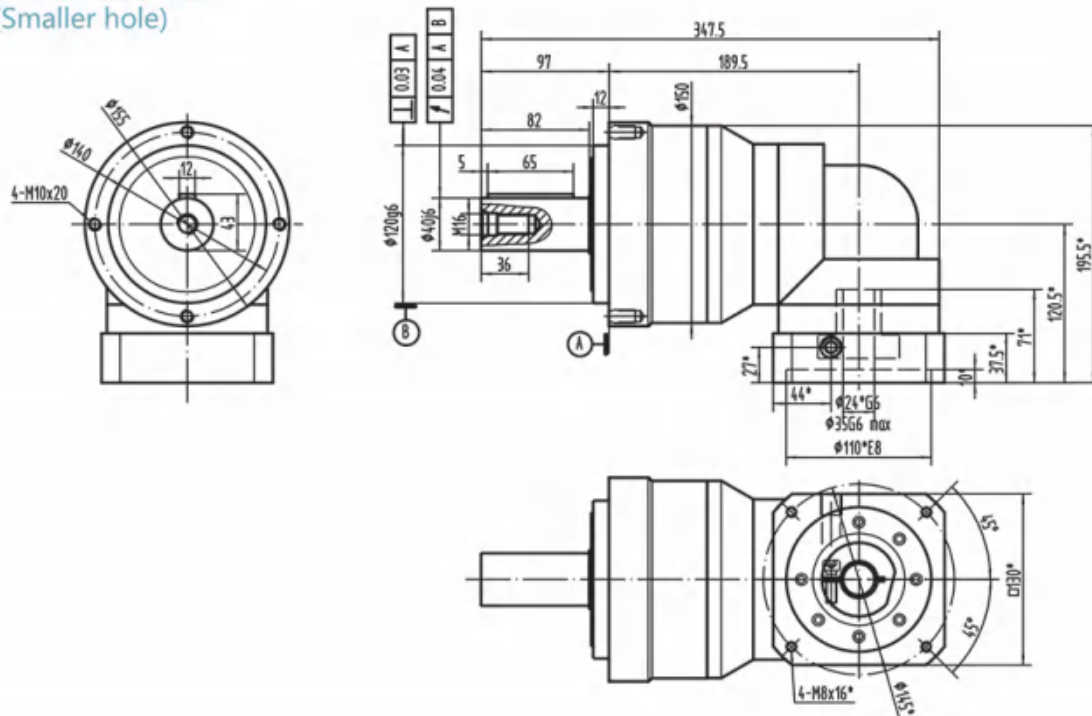



MVER-205-L1

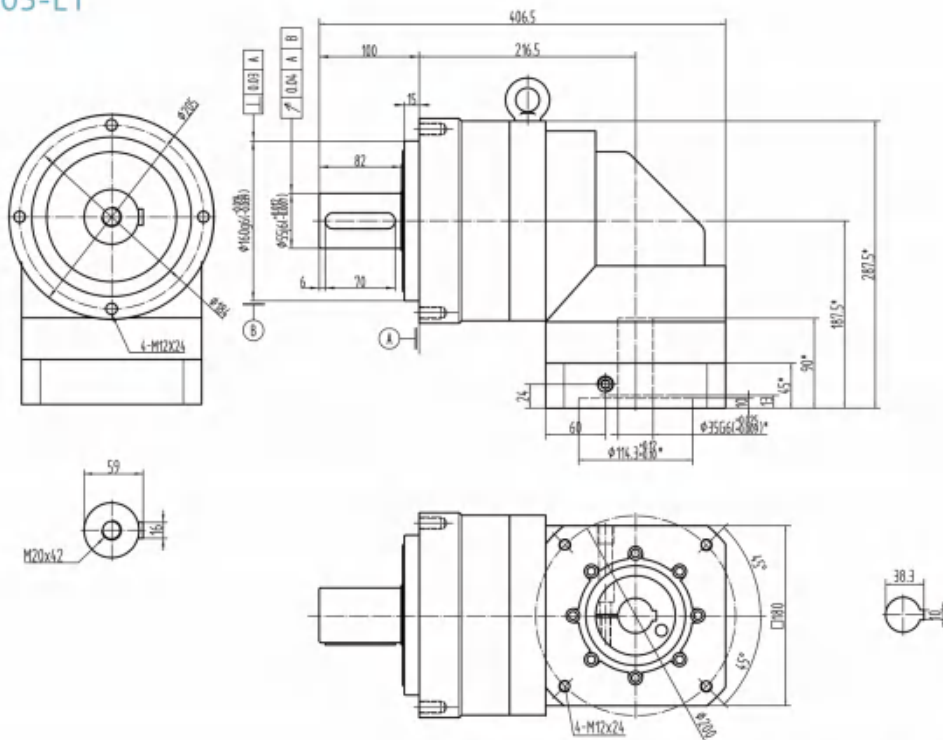



* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVER-205-L2

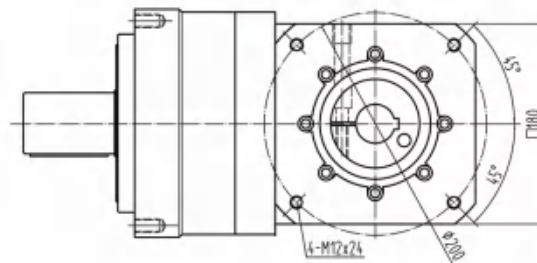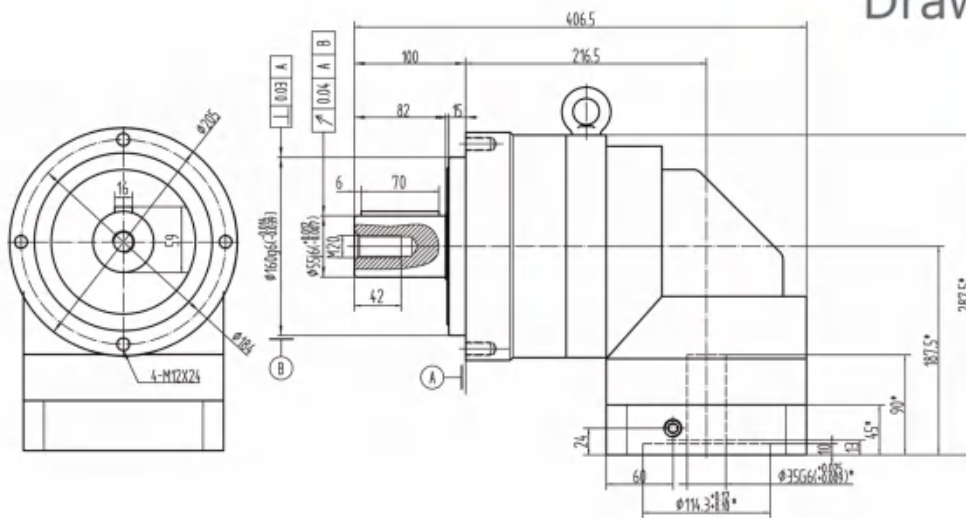

MVER-235-L2

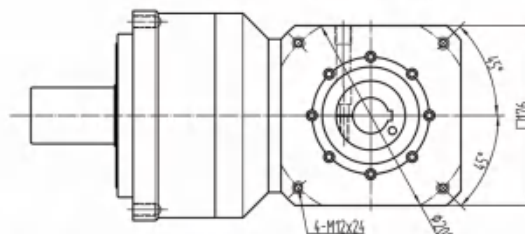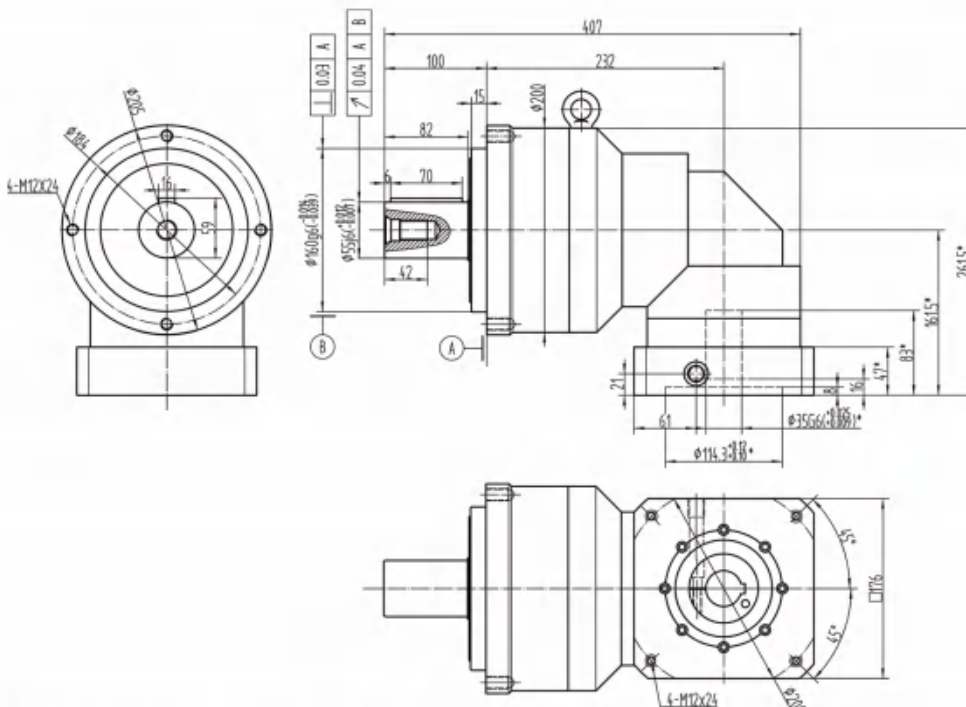

*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MVER-040																							
Symb. Unit	i	T _{2N} N _m	T _{2Not} N _m	n _{1N} rpm	n _{1Max} rpm	J ₁ arcmin	C ₂₁ mm/arcmin	F _{20Max} N	F _{2MMax} N	J ₁ kgcm ²	η %	L _h h	T °C	Lub	PC	MP	dB						
I STAGE	3	14	2×T _{2N}	4000	8000	≤3	3	700	610	0.03	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤63						
	4	14					3																
	5	20					3																
	6	20					3																
	7	20					2.2																
	8	20					3																
	9	14					3																
	10	14					2.2																
II STAGE	15	14				≤5	3				≥90												
	20	14					3																
	35	20					3																
	40	20					3																
	50	20					3																
	80	20					3																
	100	14					2.2																

MVER-060																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C ₂₁	F _{20Max}	F _{0Max}	J ₁	η	L _h	T	Lub	PC	MP	dB
Unit		N _m	N _m	rpm	rpm	arcmin	mm/arcmin	N	N	kgcm ²	%	h	°C				
I STAGE	3	22	2×T _{2N}	3000	6000	≤8	7	1200	1050	0.16	≥90	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤66
	4	30					7			0.14							
	5	45					7			0.13							
	6	45					7			0.13							
	7	45					7			0.13							
	8	45					7			0.13							
	9	30					7			0.13							
	10	30					7			0.13							
II STAGE	15	30					7			0.13							
	20	30					7			0.13							
	35	45					7			0.13							
	40	45					7			0.13							
	50	45					7			0.13							
	80	45					7			0.13							
	100	30					7			0.13							

Performance table

MVER-090																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C ₂₁	F _{2NMax}	F _{2AMax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	65	2×T _{2N}	3000	6000	≤8	14	2400	2200	0.61	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤68
	4	85					14			0.48							
	5	90					14			0.47							
	6	90					14			0.47							
	7	90					14			0.45							
	8	90					14			0.45							
	9	65					14			0.42							
	10	65					14			0.40							
II STAGE	15	65					14			0.45							
	20	85					14			0.45							
	35	90					14			0.45							
	40	90					14			0.45							
	50	90					14			0.45							
	80	90					14			0.40							
	100	65					14			0.40							

MVER-120																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C ₂₁	F _{2NMax}	F _{2AMax}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	150	2×T _{2N}	3000	6000	≤8	25	4200	3800	3.25	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤72
	4	200					25			2.74							
	5	260					25			2.71							
	6	300					25			2.71							
	7	300					25			2.62							
	8	300					25			2.60							
	9	200					25			2.59							
	10	200					25			2.57							
II STAGE	15	200					25			0.45							
	20	300					25			0.45							
	35	300					25			0.45							
	40	300					25			0.45							
	50	300					25			0.40							
	80	300					25			0.40							
	100	200					25			0.40							

Performance table

MVER-155																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{2RM}	F _{2AM}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	270	2×T _{2N}	2000	4000	≤8	50	8500	7800	9.21	≥90	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤74
	4	350					50			7.54							
	5	420					50			7.42							
	6	520					50			7.42							
	7	600					50			7.14							
	8	600					50			7.14							
	9	400					50			7.08							
	10	400					50			7.03							
II STAGE	15	400					50			2.63	≥90	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤74
	20	520					50			2.63							
	35	600					50			2.43							
	40	600					50			2.43							
	50	600					50			2.39							
	80	600					50			2.39							
	100	400					50			2.39							

MVER-205																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{2RM}	F _{2AM}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	500	2×T _{2N}	2000	4000	≤8	145	14500	13400	28.98	≥90	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤78
	4	900								23.67							
	5	900								23.29							
	6	900								22.29							
	7	900								22.48							
	8	900								22.48							
	9	550								22.40							
	10	550								22.51							
II STAGE	15	880								7.3	≥90	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤78
	20	1250								7.3							
	35	1300								7.1							
	40	1250								6.92							
	50	1300								6.92							
	80	1300								6.72							
	100	880								6.72							

Performance table

MVER-235																	
Symb.	i	T _{2N}	T _{2N01}	n _{2N}	n _{1Max}	j _r	C _{2r}	F _{230Max}	F _{24Max}	J ₁	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nmm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	15	1200								22.79							
	20	1700								23.79							
	35	1800								22.59							
	40	1800	2×T _{2N}	1500	3000	≤8	225	20500	18800	21.83	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤81
	50	1800								21.83							
	80	1800								21.70							
	100	1200								21.60							

MVDR SERIES



此款应用高端直角解决方案，保持原有MVD系列的设计与性能。

A high-performance right-angle solution for servo applications that keeps MVD's design and characteristics.



造型数据:


Selection data:

扭矩 (Nm)	22-600
速比	3-100
背隙 (arcmin)	≤8
最大工作温度 (°C)	90
噪音 (dB)	66-74


Nominal output torque (Nm)	22-600
Reduction ratio	3-100
Backlash (arcmin)	≤8
Max.working temperature (°C)	90
Noise (dB)	66-74

Drawing / Size

MVDR-060-L1

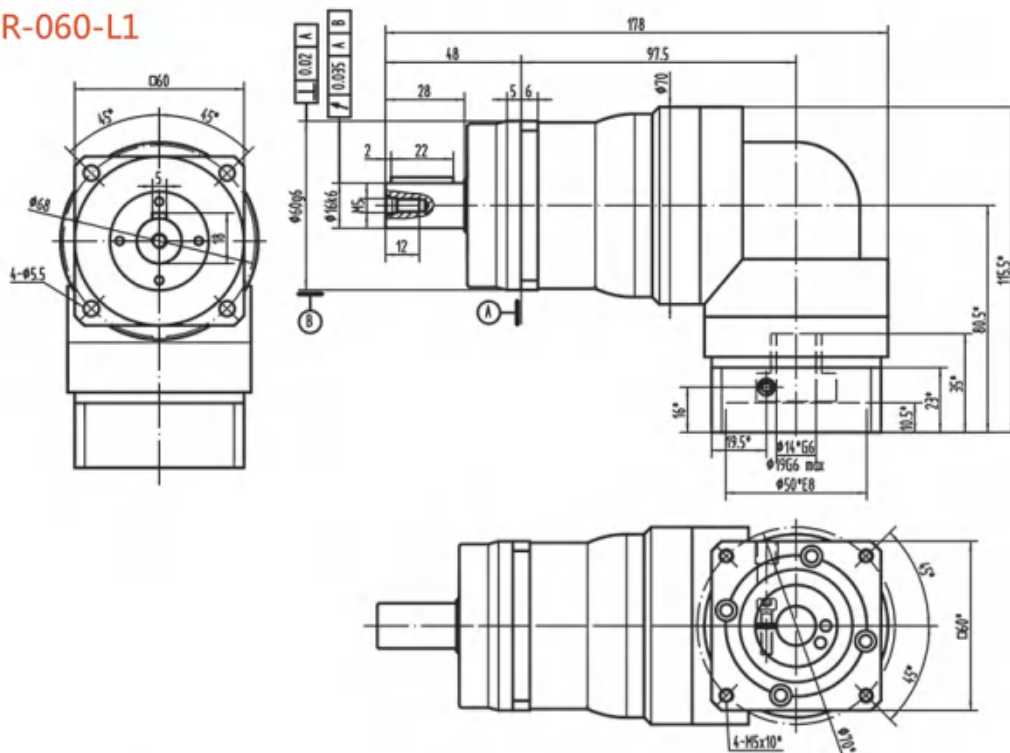


MVDR-060-L2

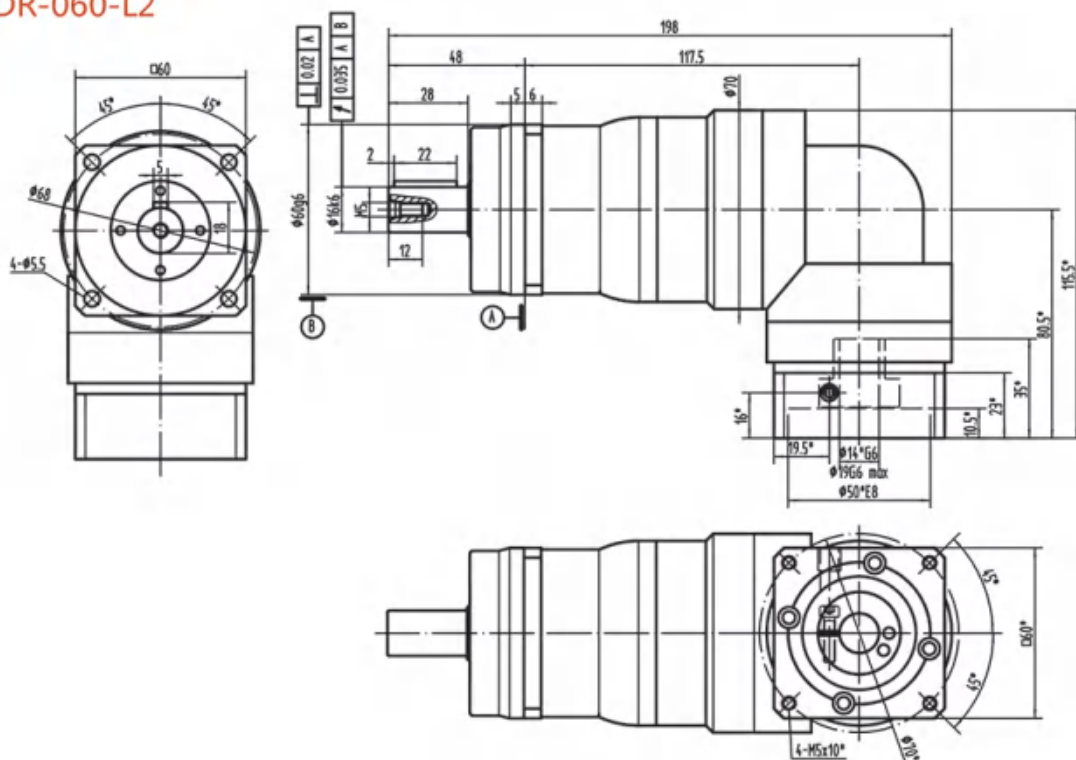


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVDR-075-L1

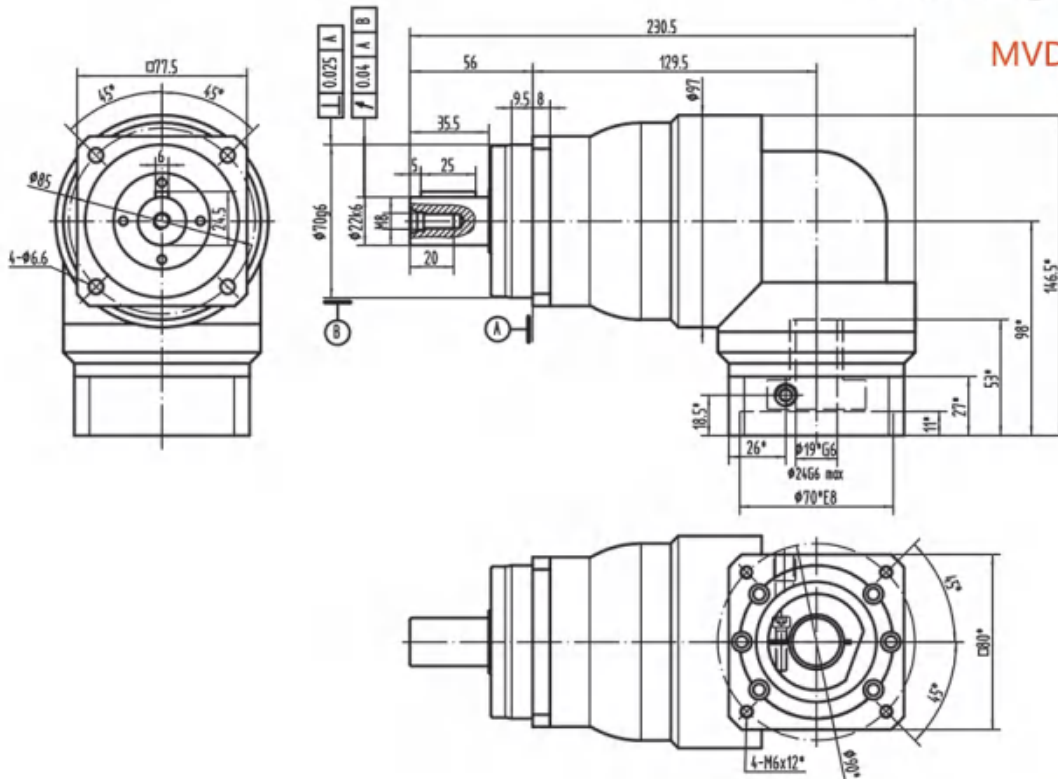


MVDR-075-L2

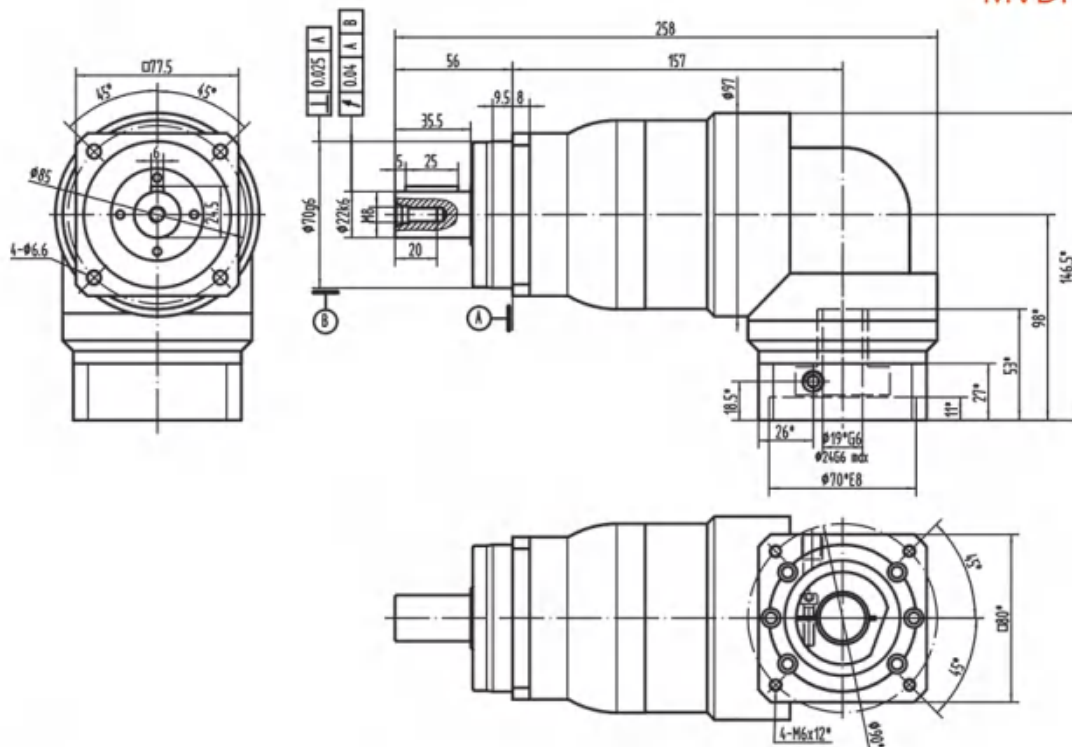


Drawing / Size

MVDR-075-L2 (Smaller hole)

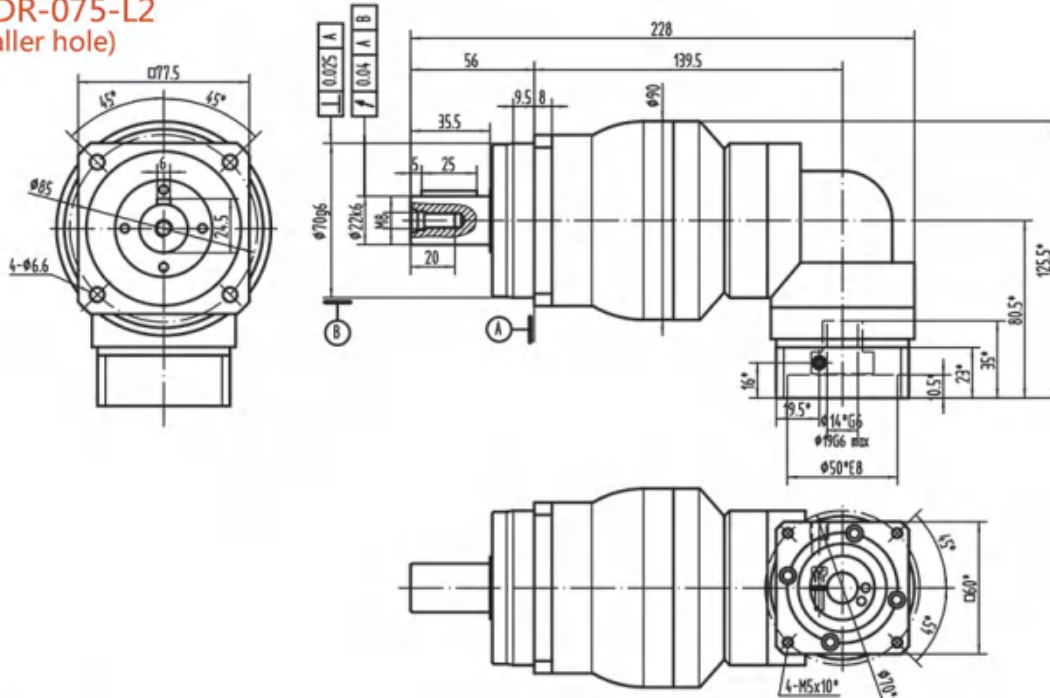


MVDR-100-L1

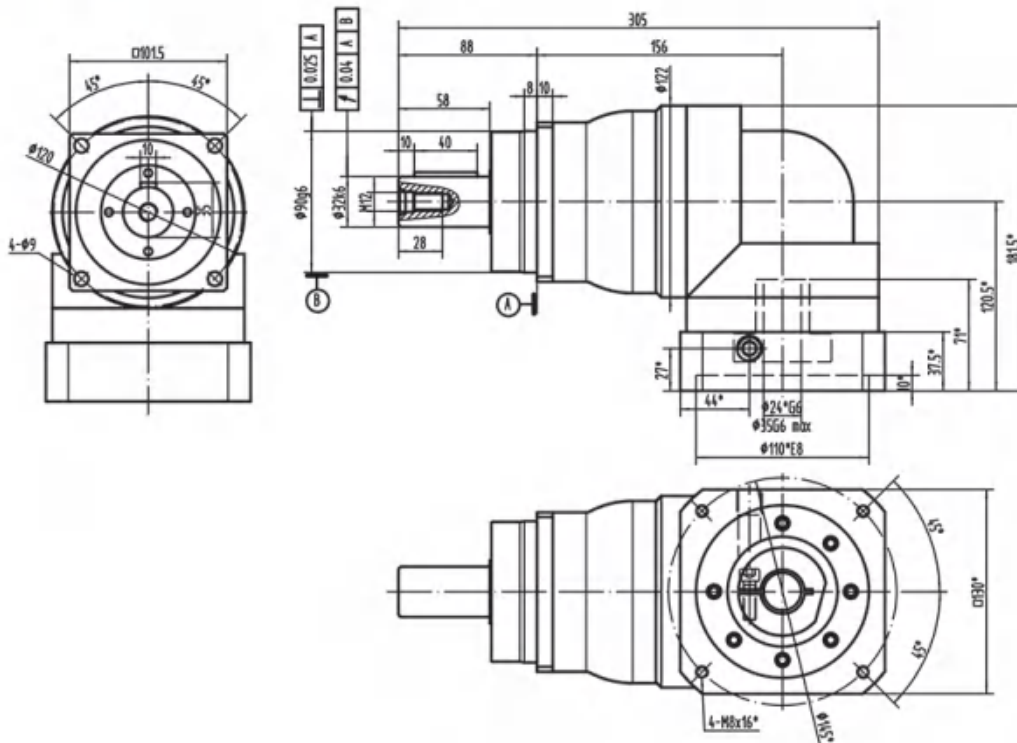


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVDR-100-L2

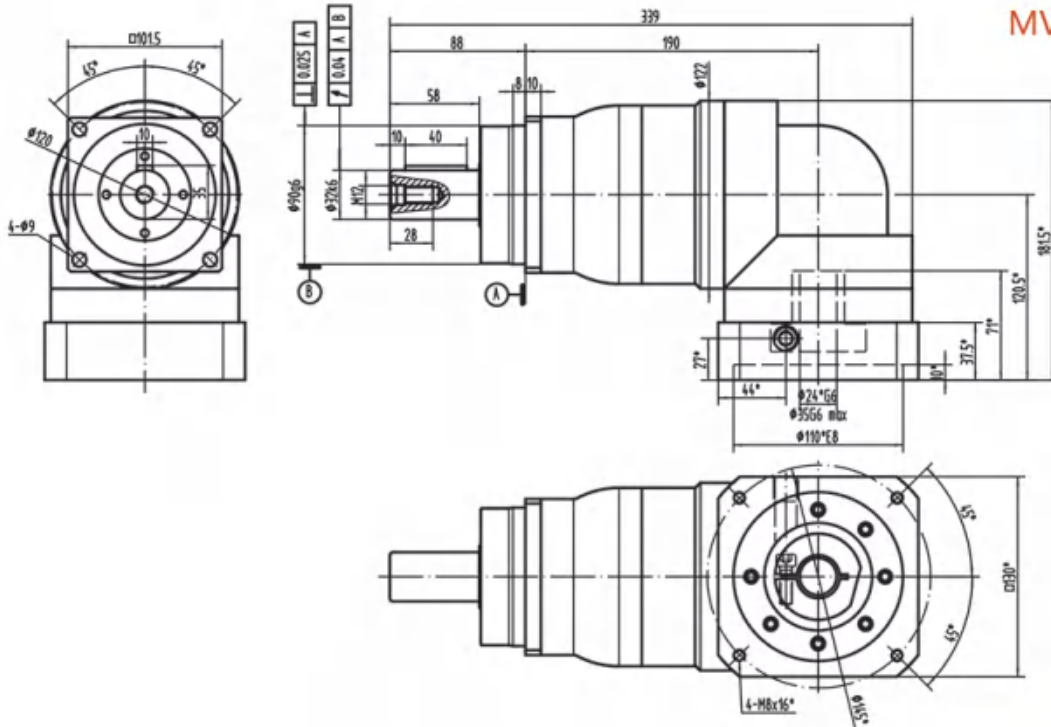


**MVDR-100-L2
(Smaller hole)**

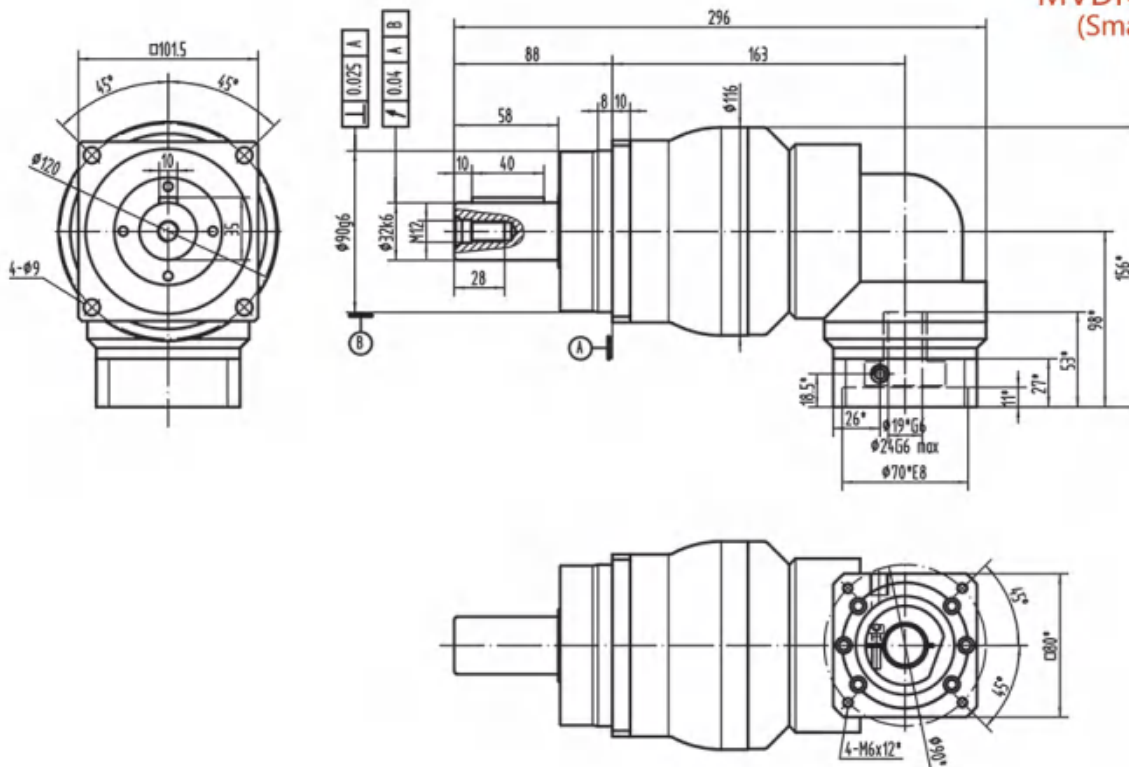


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVDR-140-L1


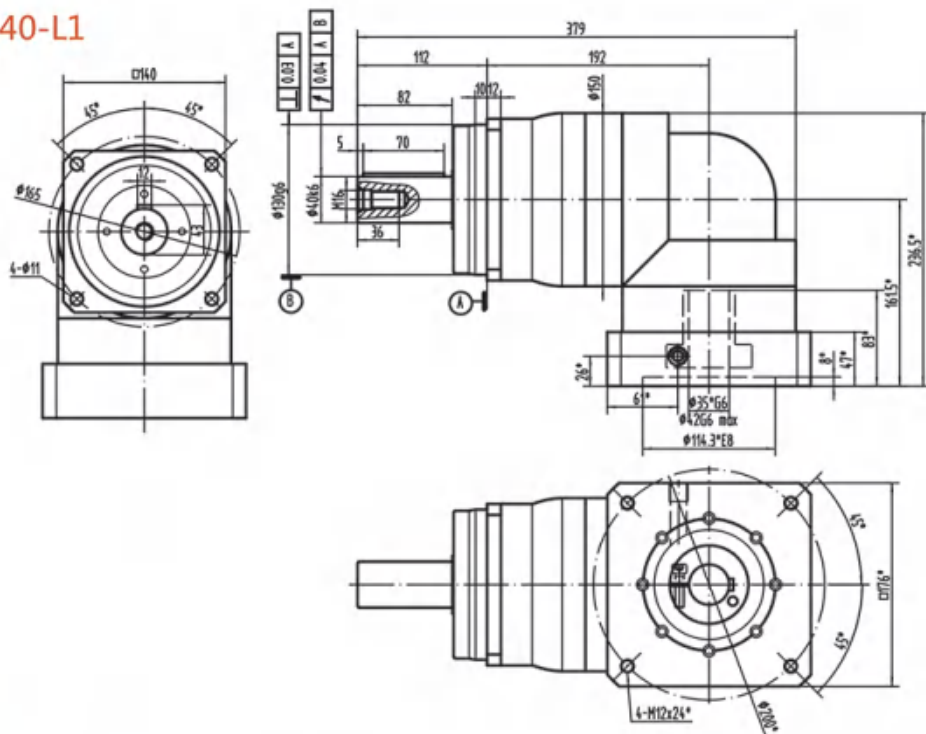


MVDR-140-L2

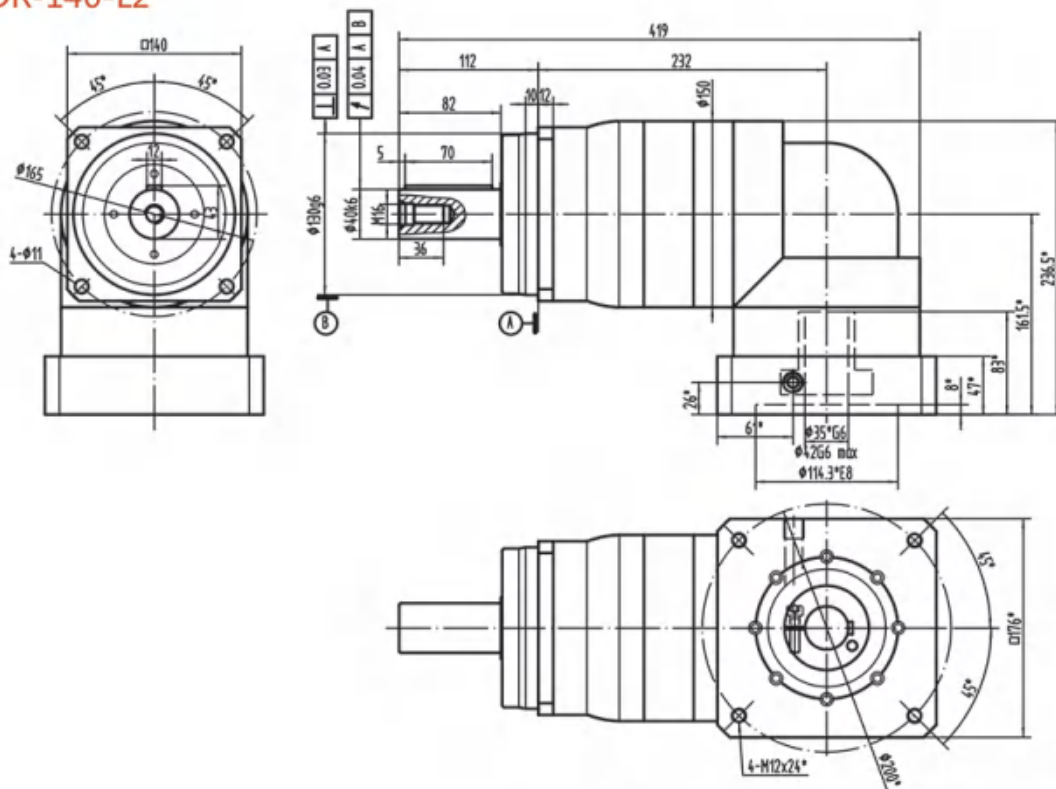

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！


Drawing / Size

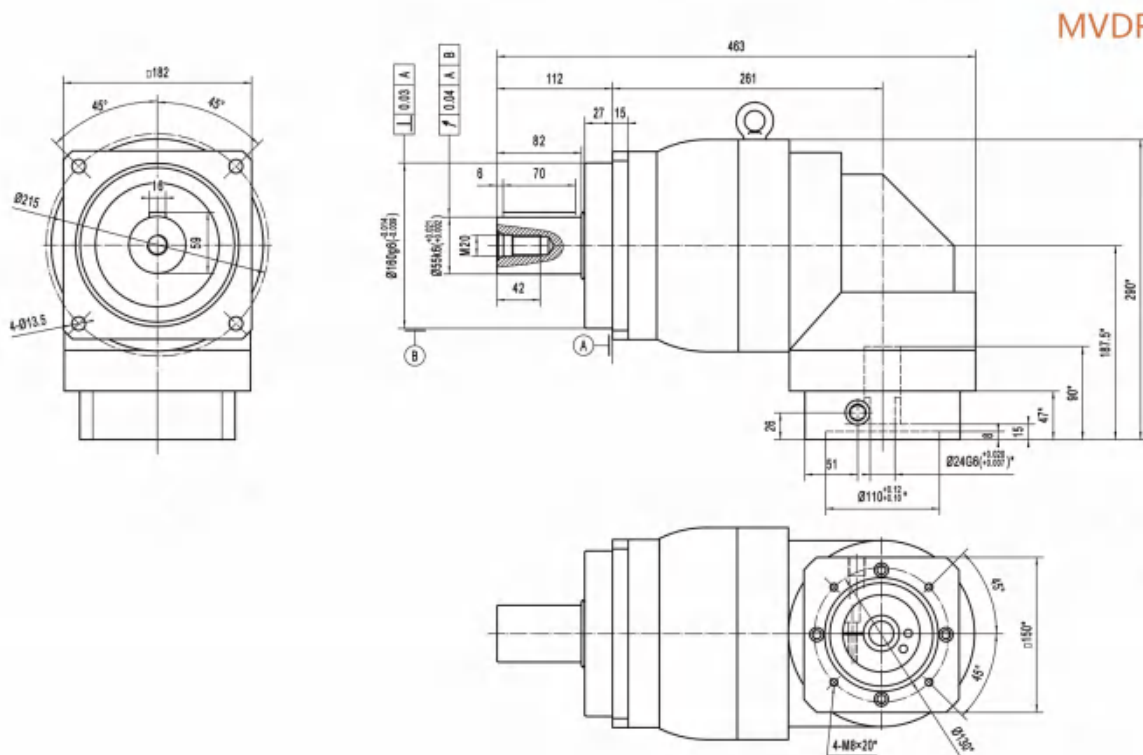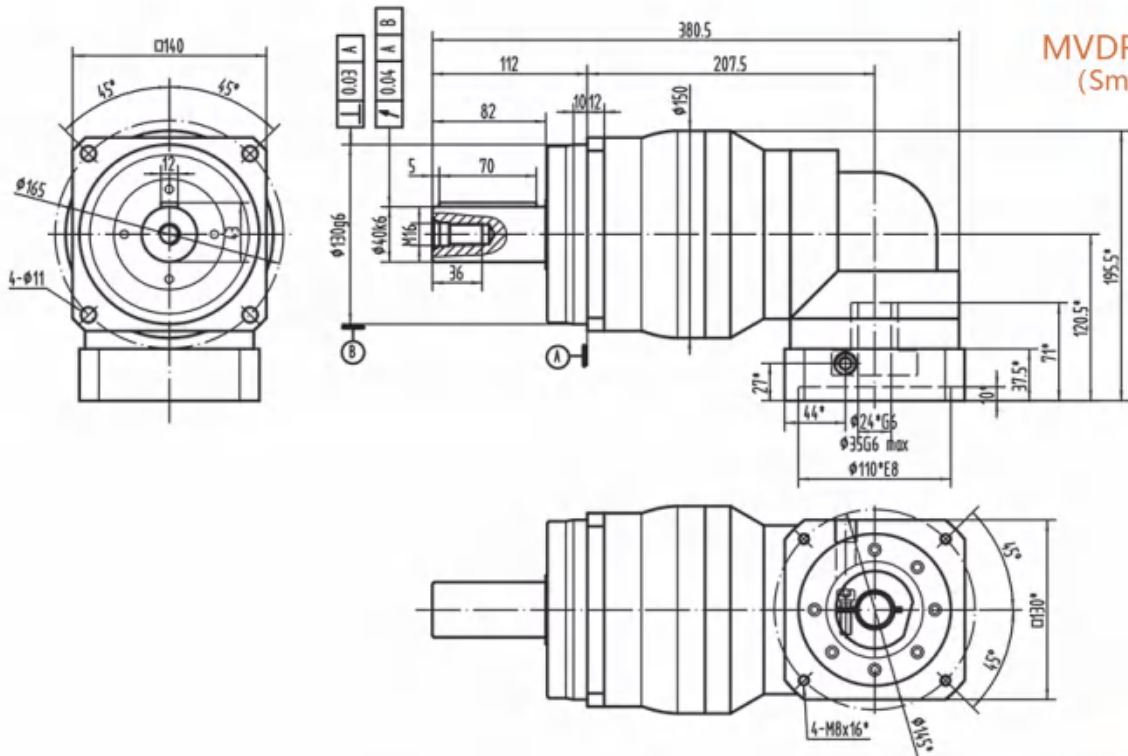


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MVDR-180-L2

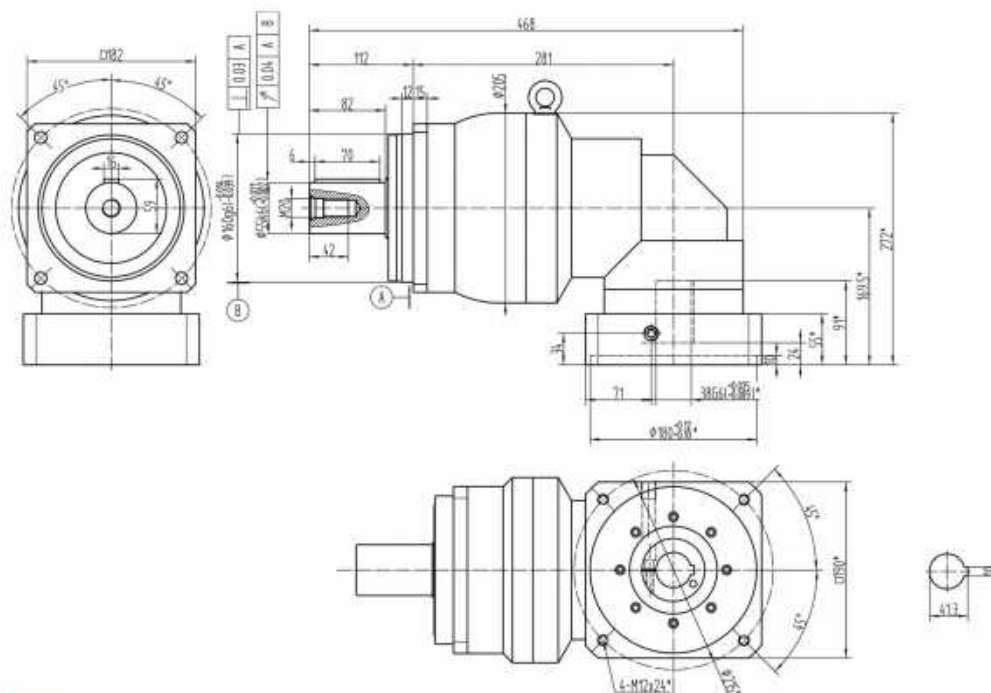

MVDR-210-L2

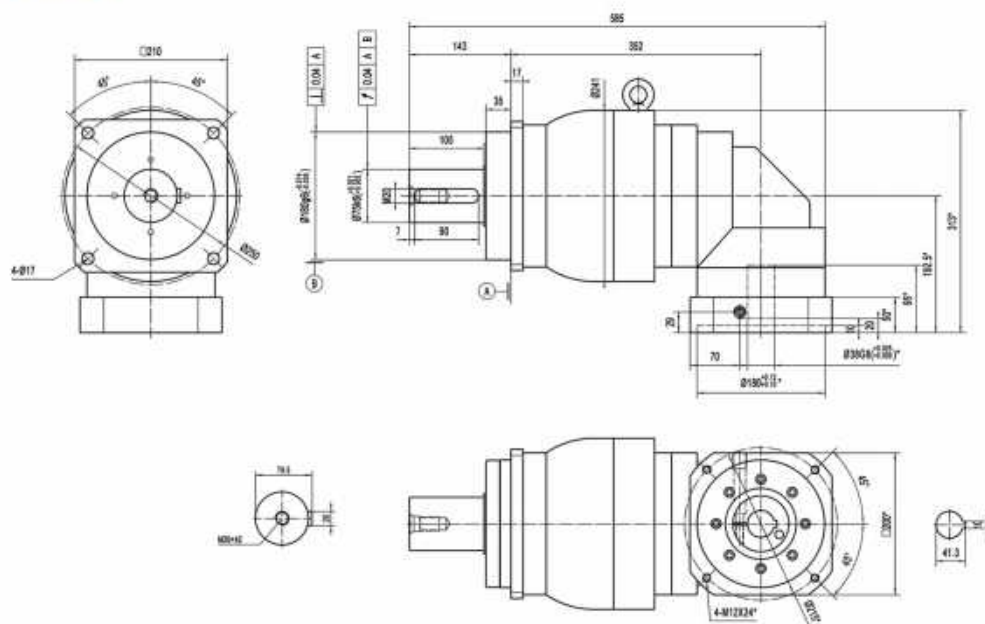

* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Performance table

MVDR-060																	
Symb.	i	T _{2N}	T _{2hot}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{2PMax}	F _{3PMax}	j ₁	η	L _h	T	Lub	PC	MP	dB
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				
I STAGE	3	22	2×T _{2N}	3000	6000	≤8	7	3000	2700	0.16	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤66
	4	30					7			0.14							
	5	45					7			0.13							
	6	45					7			0.13							
	7	45					7			0.13							
	8	45					7			0.13							
	9	30					7			0.13							
	10	30					7			0.13							
II STAGE	15	30					7			0.13							
	20	30					7			0.13							
	35	45					7			0.13							
	40	45					7			0.13							
	50	45					7			0.13							
	80	45					7			0.13							
	100	30					7			0.13							

MVDR-075																	
Symb.	i	T _{2N}	T _{2hot}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{2PMax}	F _{3PMax}	j ₁	η	L _h	T	Lub	PC	MP	dB
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				
I STAGE	3	65	2×T _{2N}	3000	6000	≤8	14	4200	3900	0.61	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤68
	4	85					14			0.48							
	5	90					14			0.47							
	6	90					14			0.47							
	7	90					14			0.45							
	8	90					14			0.45							
	9	65					14			0.42							
	10	65					14			0.40							
II STAGE	15	65					14			0.45							
	20	85					14			0.45							
	35	90					14			0.45							
	40	90					14			0.45							
	50	90					14			0.45							
	80	90					14			0.40							
	100	65					14			0.40							

Performance table

MVDR-100																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C ₂₁	F _{2SMax}	F _{2AMax}	J ₁	η	L _h	T	Lub	PC	MP	dB
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				
I STAGE	3	150	2×T _{2N}	3000	6000	≤8	25	6800	6200	3.25	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤72
	4	200					25			2.74							
	5	260					25			2.71							
	6	300					25			2.71							
	7	300					25			2.62							
	8	300					25			2.60							
	9	200					25			2.59							
	10	200					25			2.57							
II STAGE	15	200					25			0.45							
	20	300					25			0.45							
	35	300					25			0.45							
	40	300					25			0.45							
	50	300					25			0.40							
	80	300					25			0.40							
	100	200					25			0.40							

MVDR-140																	
Symb.	i	T _{2N}	T _{2Not}	n _{1N}	n _{1Max}	j ₁	C ₂₁	F _{2SMax}	F _{2AMax}	J ₁	η	L _h	T	Lub	PC	MP	dB
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				
I STAGE	3	270	2×T _{2N}	2000	4000	≤8	50	11000	9800	9.21	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤74
	4	350					50			7.54							
	5	420					50			7.42							
	6	520					50			7.42							
	7	600					50			7.14							
	8	600					50			7.14							
	9	400					50			7.08							
	10	400					50			7.03							
II STAGE	15	400					50			2.63							
	20	520					50			2.63							
	35	600					50			2.43							
	40	600					50			2.43							
	50	600					50			2.39							
	80	600					50			2.39							
	100	400					50			2.39							

Performance table

MVDR-180																	
Symb.	i	T _{2N}	T _{2Not}	n _{1H}	n _{1Max}	j _t	C _{2t}	F _{2HMax}	F _{2HMax}	J _t	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	3	1000	2xT _{2N}	1500	3500	≤8	175	18500	15500	54.20	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤75
	4	1500								39.44							
	5	1700								33.38							
	6	1700								33.02							
	7	1700								27.49							
	8	1700								27.00							
	9	1100								26.37							
	10	1100								47.00							
II STAGE	15	1200								34.5							
	20	1700								31.5							
	25	1800								30.8							
	50	1800								28.3							
	80	1800								26.37							
	100	1200								30.36							

MVDR-210																	
Symb.	i	T _{2N}	T _{2Not}	n _{1H}	n _{1Max}	j _t	C _{2t}	F _{2HMax}	F _{2HMax}	J _t	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	Nm/arcmin	N	N	kgcm ²	%	h	°C				dB
I STAGE	15	2300	2xT _{2N}	1200	3000	≤8	400	23000	20500	34.5	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤79
	20	2300								31.5							
	25	2400								20.8							
	50	2400								28.3							
	80	2400								28.1							
	100	1800								28							

MAFR SERIES



此款应用高端直角解决方案，保持原有MAF系列的设计与性能。

A high-performance right-angle solution for servo applications that keeps MAF's design and characteristics.



造型数据:


Selection data:

扭矩 (Nm)	14-600
速比	4-100
背隙 (arcmin)	≤8
最大工作温度 (°C)	90
噪音 (dB)	63-71


Nominal output torque (Nm)	14-600
Reduction ratio	3-100
Backlash (arcmin)	≤8
Max.working temperature (°C)	90
Noise (dB)	63-71

Drawing / Size

MAFR-047-L1

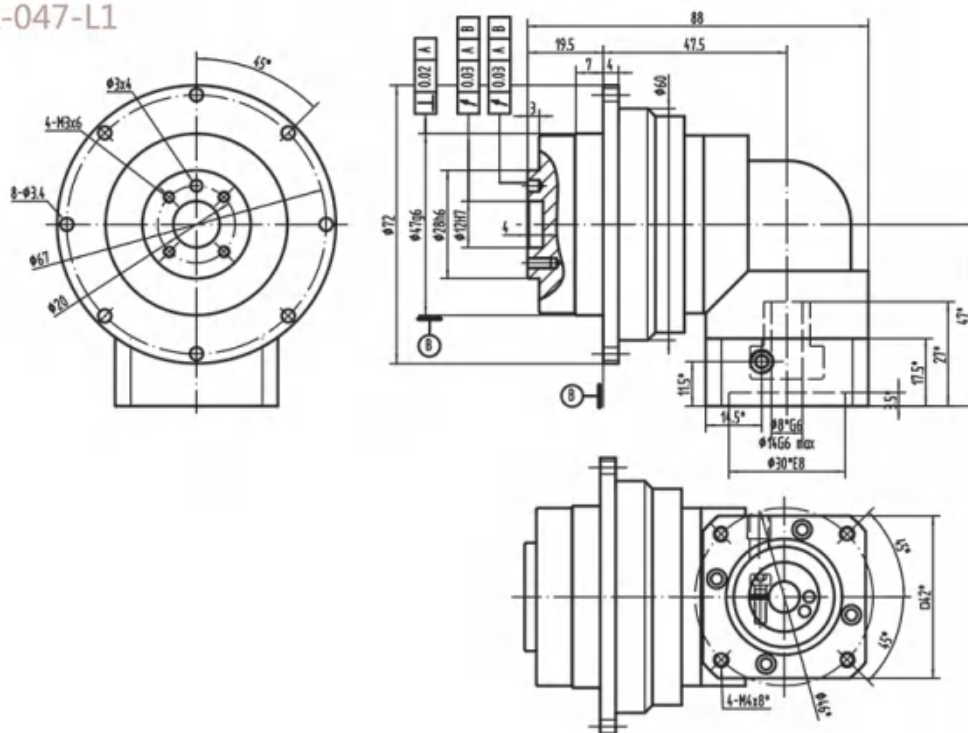



MAFR-047-L2

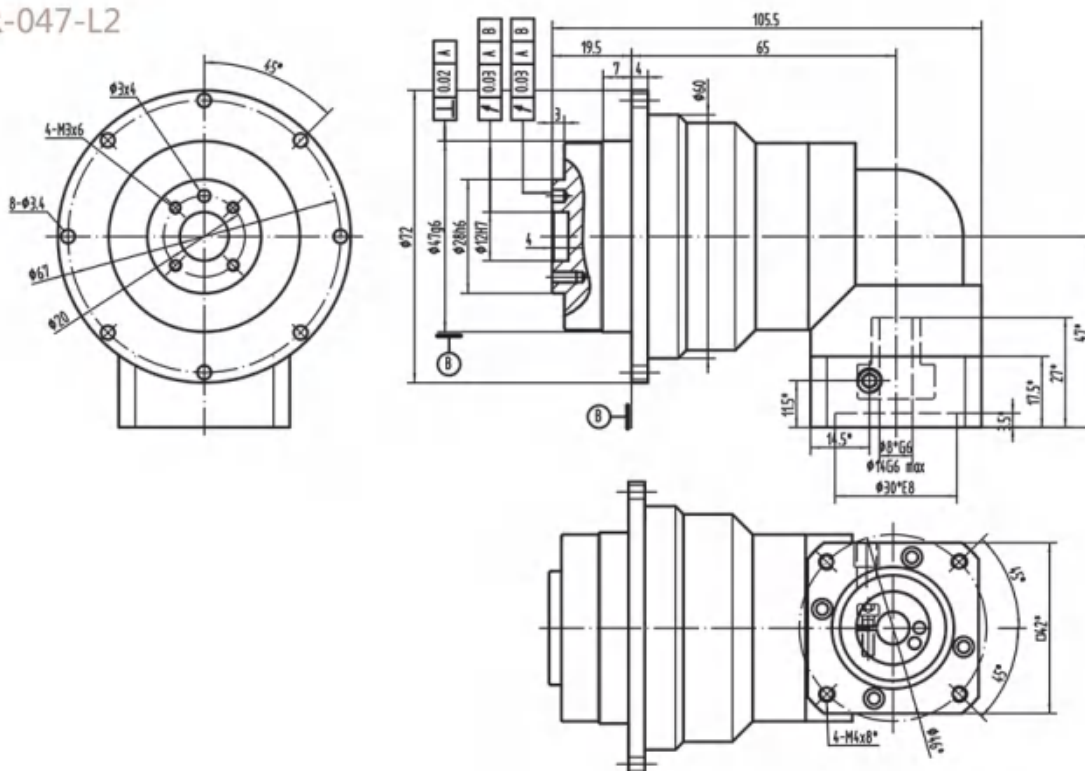



*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFR-064-L1

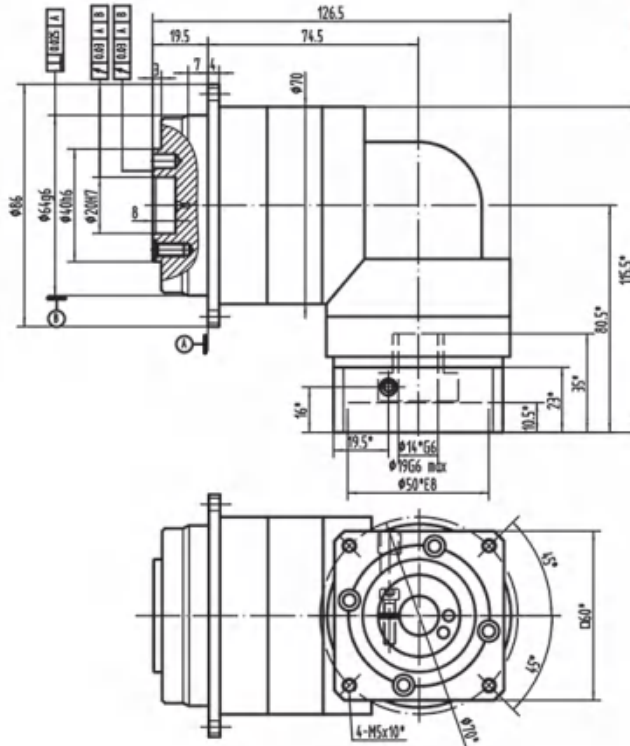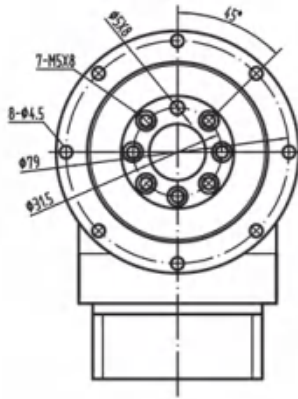


MAFR-064-L2

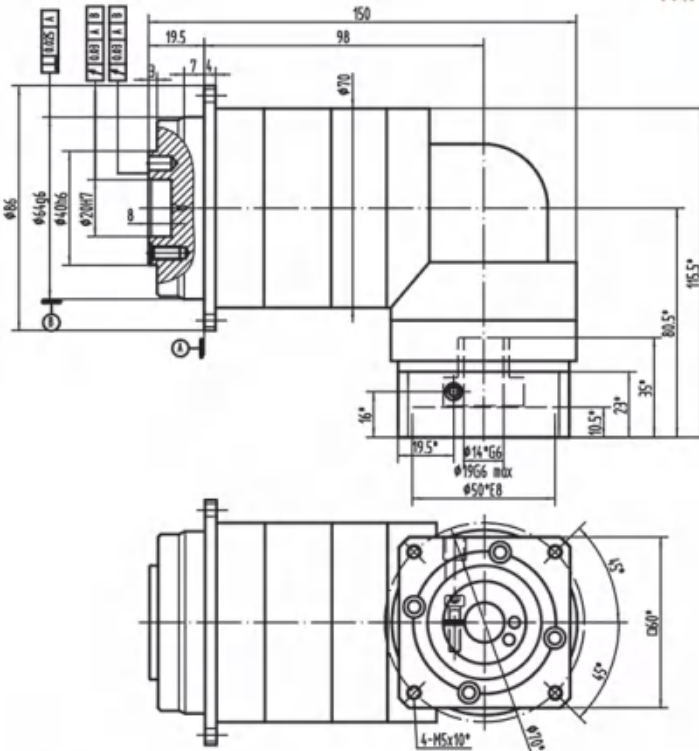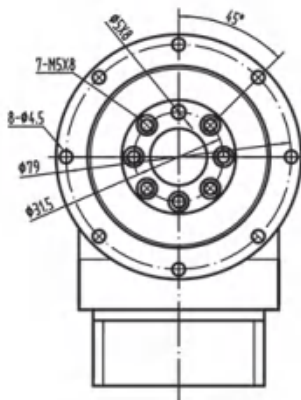


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFR-090-L1

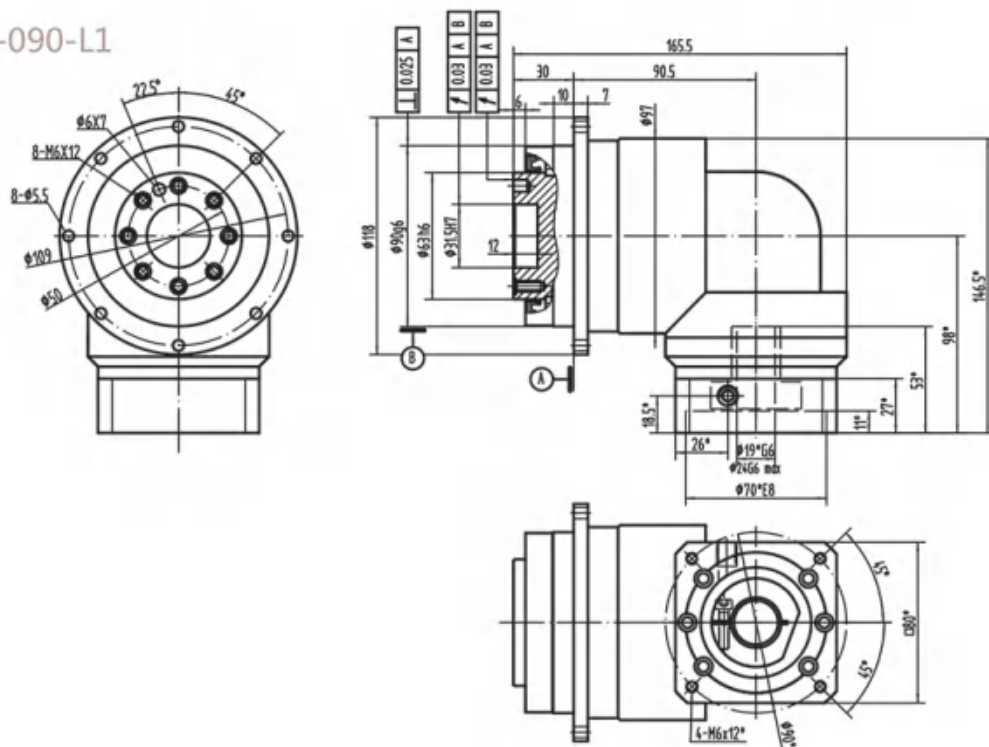


MAFR-090-L2

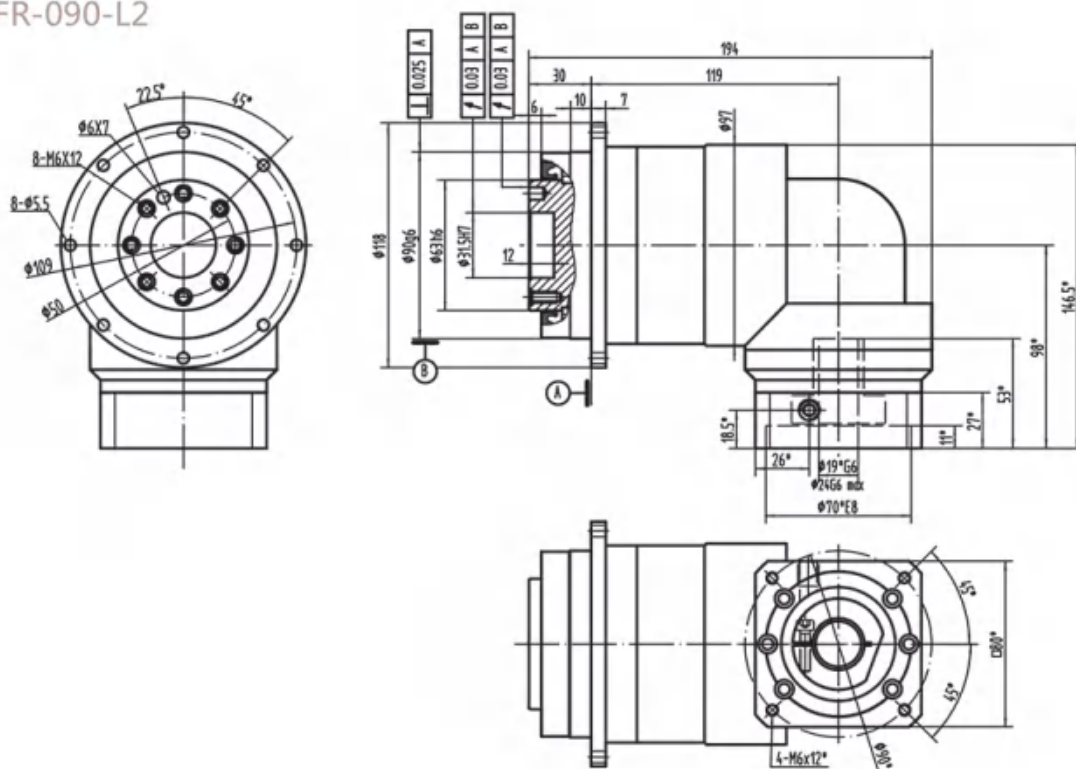


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFR-090-L2
(Smaller hole)

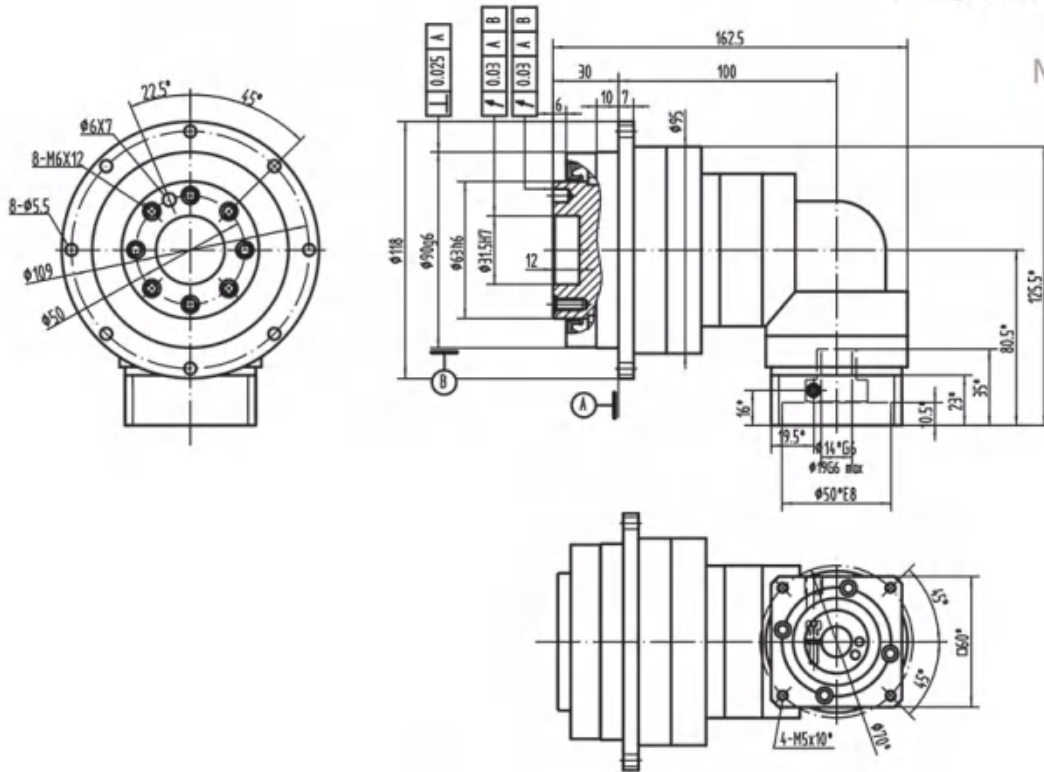


MAFR-110-L1

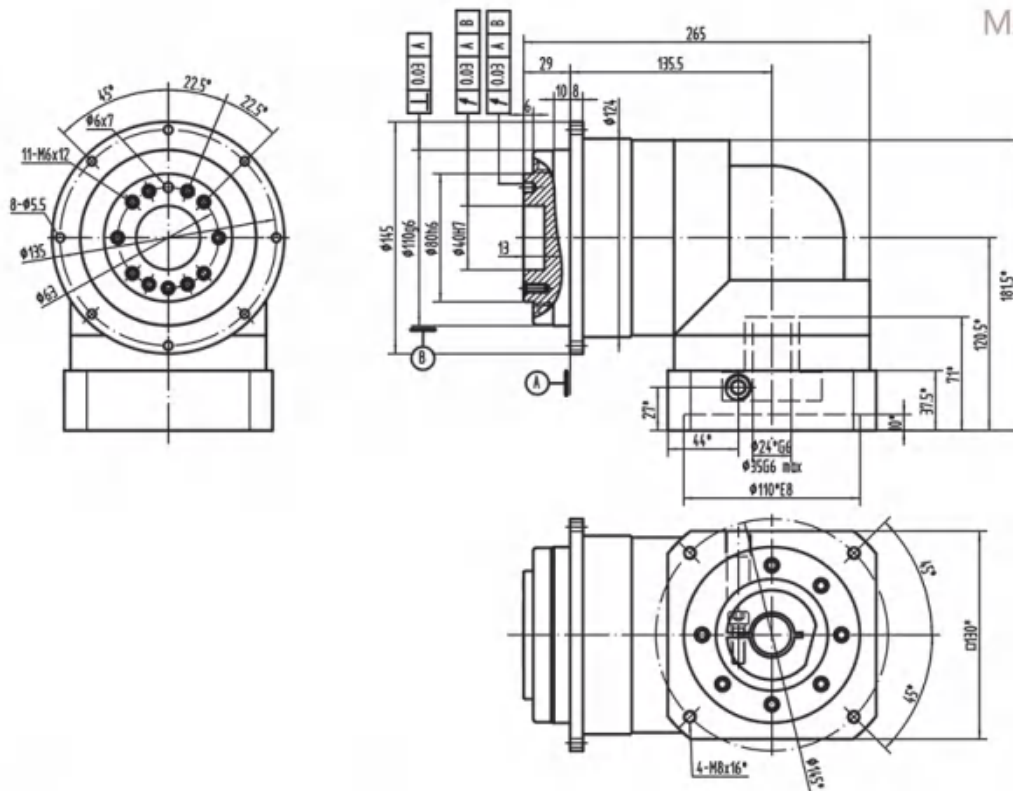


*Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFR-110-L2

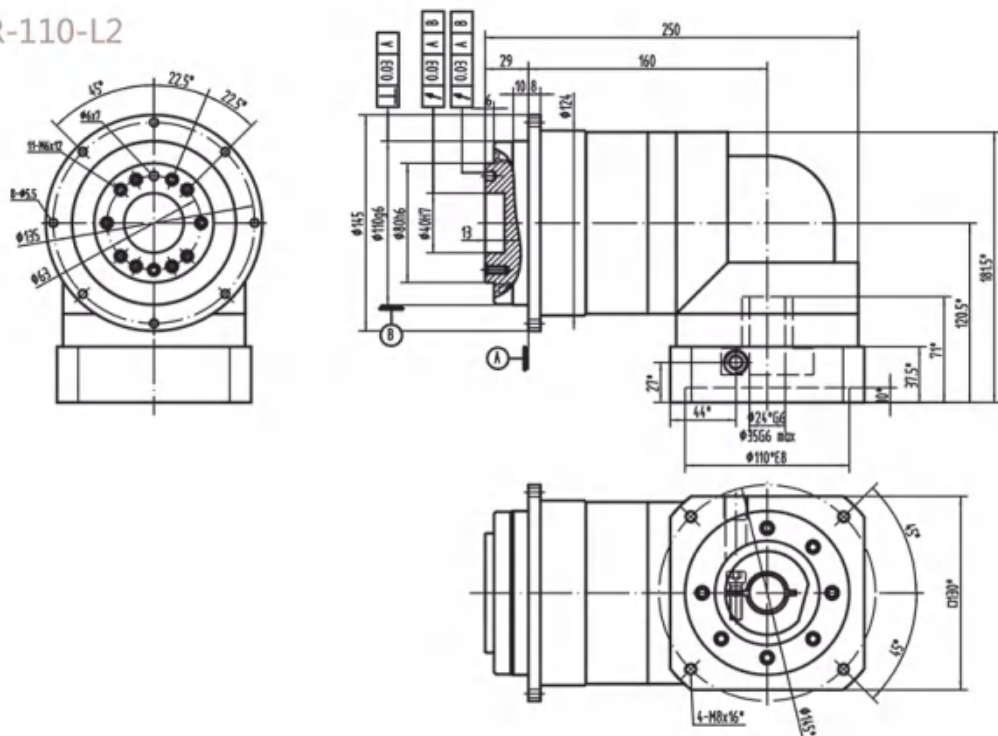


MAFR-110-L2
(Smaller hole)

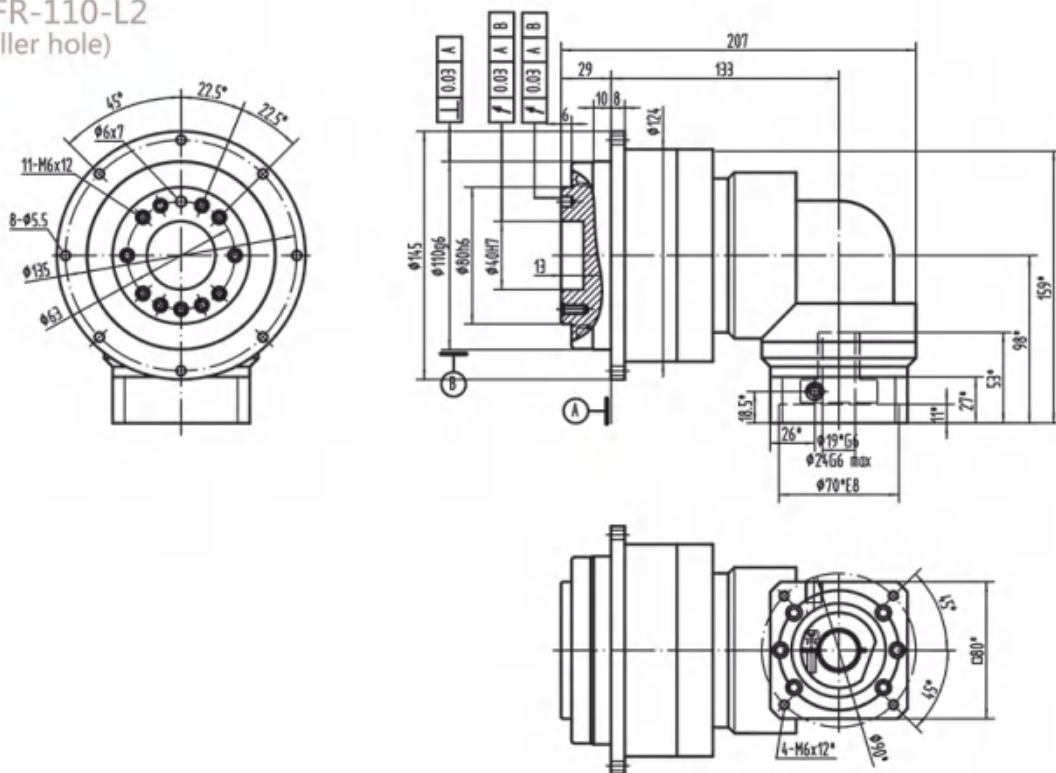


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFR-140-L1

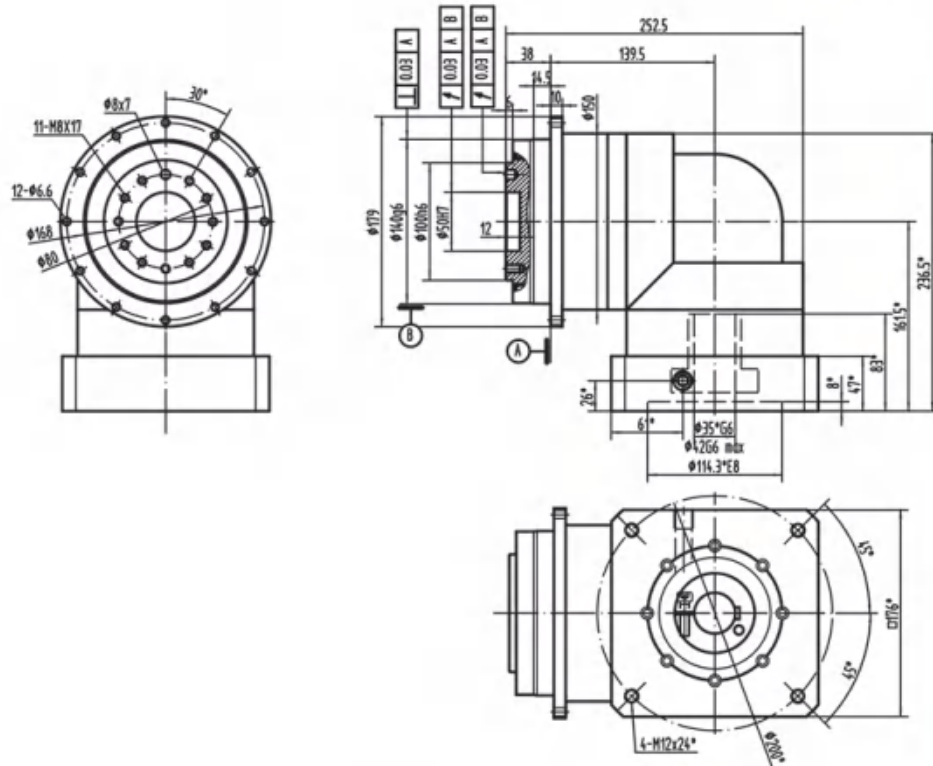




MAFR-140-L2

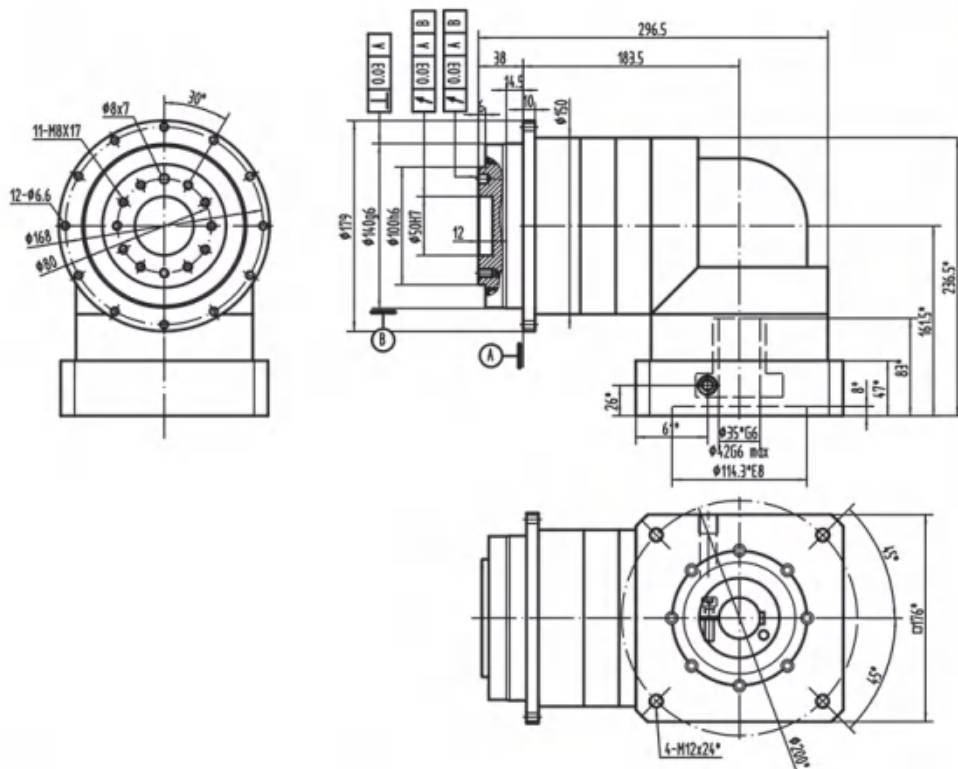




*Dimensions based on servo-motor, please contact us for custom made order.
注有*尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

Drawing / Size

MAFR-140-L2
(Smaller hole)

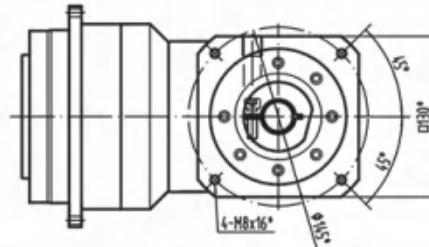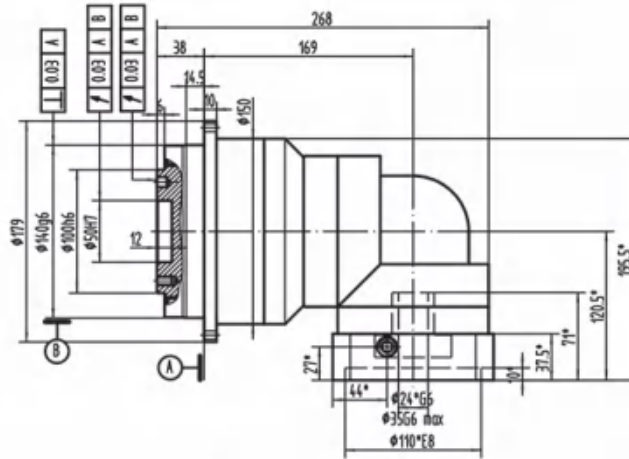


MAFR-200-L1

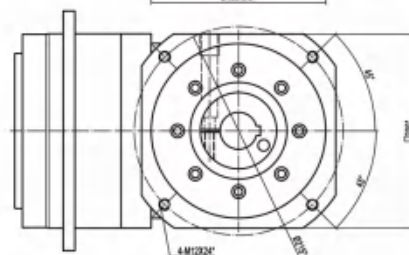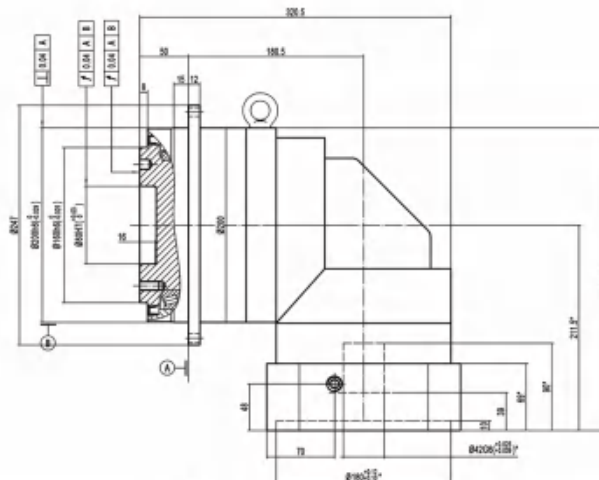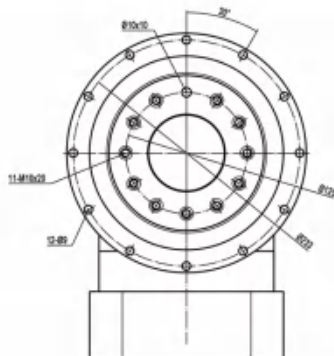


* Dimensions based on servo-motor, please contact us for custom made order.
注有 * 尺寸：代表可根据客户需求定制产品，如有需要，请联系我们！

MAFR-200-L2

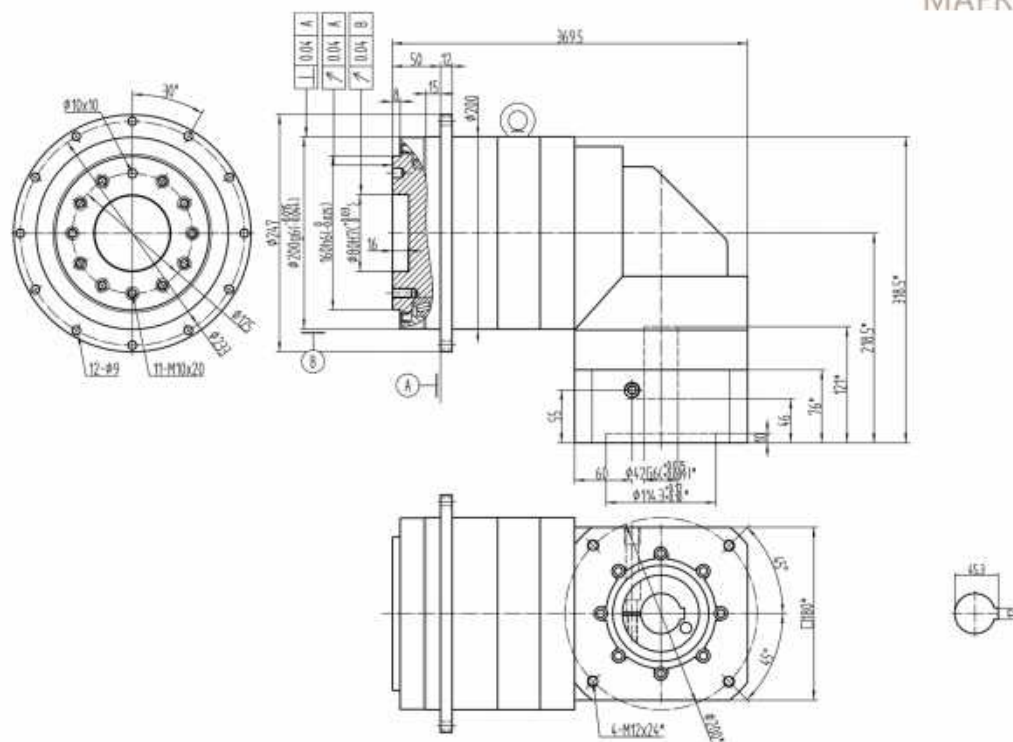

MAFR-255-L2

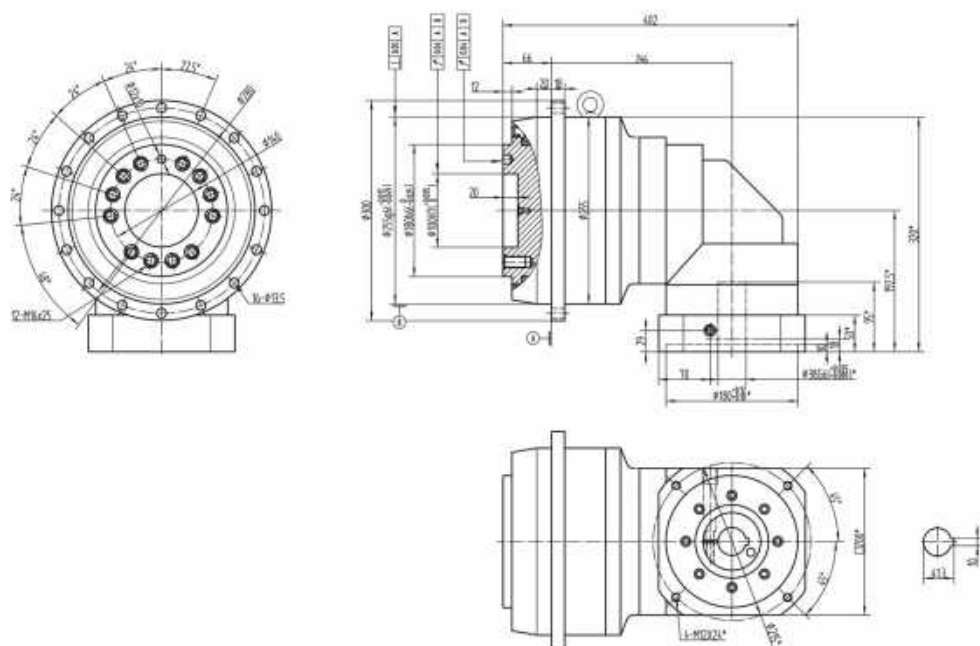

*Dimensions based on servo-motor, please contact us for custom made order.
注有*尺寸:代表可根据客户需求定制产品,如有需要,请联系我们!

Performance table

MAFR-047																										
Symb.	i	T _{2N}	T _{2Max}	n _{1N}	n _{1Max}	j ₁	C _{2t}	F _{2RM}	F _{2Max}	j ₂	η	L _h	T	Lub	PC	MP										
Unit		N _m	N _m	rpm	rpm	arcmin	newtonm	N	N	kg/cm ²	%	h	°C				dB									
I STAGE	4	14	2×T _{2N}	3500	7000	≤3	5	800	500	3	≥95	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤63									
	5	20								3																
	6	20								3																
	7	20								2.2																
	8	20								3																
	9	14								3																
	10	14								2.2																
II STAGE	20	14				≤5				3	≥90															
	25	20								3																
	50	20								3																
	80	20								3																
	100	14								2.2																

MAFR-064																	
Symb. Unit	i	T _{2N} N _m	T _{2Max} N _m	n _{1N} rpm	n _{1Max} rpm	j ₁ arcmin	C _{2t} Nmm/mm	F _{2RM} N	F _{2Max} N	j ₂ kg/cm ²	η %	L _h h	T °C	Lub	PC	MP	dB
I STAGE	4	30	2×T _{2N}	3300	6000	≤8	13	1300	650	0.13	≥90	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤62
	5	40								0.13							
	6	45								0.13							
	7	45								0.13							
	8	45								0.03							
	9	30								0.03							
	10	30								0.03							
II STAGE	20	30	2×T _{2N}	3300	6000	≤8	13	1300	650	0.03	≥90	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤62
	25	45								0.03							
	50	45								0.03							
	80	45								0.03							
	100	30								0.03							

Performance table

MAFR-D90																	
Symb. Unit	i	T _{2N} N·m	T _{2Hot} N·m	n _{1N} rpm	n _{1Max} rpm	j _t arcmin	C _{2s} mm	F _{20Max} N	F _{20Min} N	j _s kg/cm ²	η %	L _h h	T ℃	Lub	PC	MP	dB
I STAGE	4	85	2×T _{2N}	2600	6000	≤8	31	3000	1580	0.51	≥90	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤63
	5	90								0.47							
	6	90								0.47							
	7	90								0.45							
	8	90								0.45							
	9	65								0.44							
	10	65								0.44							
II STAGE	20	85								0.13	≥90						
	25	85								0.13							
	50	85								0.13							
	80	90	0.44														
	100	65	0.13														

MAFR-110																	
Symb. Unit	i	T _{2N} N·m	T _{2Hot} N·m	n _{1N} rpm	n _{1Max} rpm	j _t arcmin	C _{2t} mm/mm	F _{20Max} N	F _{20Min} N	j _s kg/cm ²	η %	L _h h	T ℃	Lub	PC	MP	dB
I STAGE	4	200	2×T _{2N}	2300	6000	≤8	82	7500	3900	2.87	≥90	> 20000	-15—45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤68
	5	260								2.71							
	6	330								2.71							
	7	300								2.62							
	8	330								2.61							
	9	200								2.58							
	10	200								2.57							
II STAGE	20	200								0.47	≥90						
	25	300								0.47							
	50	300								0.44							
	80	330	0.44														
	100	200	0.44														

Performance table

MAFR-140																	
Symb.	i	T _{2N}	T _{2Mot}	n _{1N}	n _{1Max}	j _t	C _{2t}	F _{2RM}	F _{2Max}	j _t	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arcmin	kg/cm ²	N	N	kg/cm ²	%	h	°C				dB
I STAGE	4	350	2×T _{2N}	2000	5000	≤8	151	12000	8000	7.54	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤71
	5	500								7.42							
	6	520								7.42							
	7	600								7.14							
	8	600								7.13							
	9	420								7.08							
	10	400								7.03							
II STAGE	20	400								2.71	≥90						
	25	500								2.71							
	50	500								2.57							
	80	600	2.57														
	100	400	2.57														

MAFR-200																	
Symb. Unit	i	T _{2N} N _m	T _{2Mot} N _m	n _{1N} rpm	n _{1Max} rpm	j _t arcmin	C _{2t} kg/mm ²	F _{2RM} N	F _{2Max} N	j _t kg/cm ²	η %	L _h h	T °C	Lub	PC	MP	dB
I STAGE	4	900	2×T _{2N}	2000	4000	≤8	450	18520	15400	23.4	≥90	>20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤78
	5	900								23.4							
	6	900								23.4							
	7	900								23.4							
	8	900								21.8							
	9	550								21.8							
	10	550								21.8							
II STAGE	20	1250								21.8	≥90						
	25	1300								21.8							
	50	1300								21.8							
	80	1300	21.8														
	100	880	21.8														

Performance table

MAFR-255																	
Symb.	i	T _{2N}	T ₂₉₀₀	n _{1N}	n _{1Max}	j _t	C _{2t}	F _{2900Max}	F _{2000Max}	J _t	η	L _h	T	Lub	PC	MP	
Unit		N _m	N _m	rpm	rpm	arc/min	newton	N	N	kg/cm ²	%	h	°C				dB
I STAGE	20	2300	2×T _{2N}	2000	3000	≤8	1023	27000	23900	64	≥90	> 20000	-15~45	Life Lubrication 终身润滑	IP65	Any 任何方向	≤81
	25	2400								65							
	50	2400								66							
	80	2400								67							
	100	1800								68							

NOTES

[illegible]